

TECHNICAL DATA

TROUBLE SHOOTING FOR TURNING	Q002
CHIP CONTROL FOR TURNING	Q004
EFFECTS OF CUTTING CONDITIONS FOR TURNING.....	Q005
FUNCTION OF TOOL FEATURES FOR TURNING	Q007
FORMULAE FOR CUTTING POWER	Q011
TROUBLE SHOOTING FOR FACE MILLING	Q012
FUNCTION OF TOOL FEATURES FOR FACE MILLING	Q013
FORMULAE FOR FACE MILLING	Q016
TROUBLE SHOOTING FOR END MILLING	Q018
END MILL TERMINOLOGY	Q019
TYPES AND SHAPES OF END MILLS	Q020
PITCH SELECTION OF PICK FEED	Q021
TROUBLE SHOOTING FOR DRILLING	Q022
DRILL WEAR AND CUTTING EDGE DAMAGE	Q023
DRILL TERMINOLOGY AND CUTTING CHARACTERISTICS	Q024
FORMULAE FOR DRILLING	Q027
METALLIC MATERIALS CROSS REFERENCE LIST	Q028
DIE STEELS.....	Q032
SURFACE ROUGHNESS	Q034
HARDNESS COMPARISON TABLE	Q035
JIS FIT TOLERANCE HOLE	Q036
JIS FIT TOLERANCE SHAFT	Q038
DRILL DIAMETERS FOR PREPARED HOLES	Q040
HEXAGON SOCKET HEAD BOLT HOLE SIZE.....	Q041
TAPER STANDARD.....	Q042
INTERNATIONAL SYSTEM OF UNITS.....	Q043
SYSTEM OF UNITSTOOL WEAR AND DAMAGE	Q044
CUTTING TOOL MATERIALS	Q045
GRADE CHAIN	Q046
GRADES COMPARISON TABLE	Q047
INSERT CHIP BREAKER COMPARISON TABLE.....	Q053

TROUBLE SHOOTING FOR TURNING

Trouble		Solution	Insert Grade Selection				Cutting Conditions				Style and Design of the Tool					Machine, Installation of Tool				
			Select a harder grade	Select a tougher grade	Select a grade with better thermal shock resistance	Select a grade with better adhesion resistance	Cutting speed	Feed	Depth of cut	Coolant	Select chip breaker	Rake	Corner radius	Lead angle	Honing strengthens the cutting edge	Class of insert	Improve tool holder rigidity	Increase clamping rigidity of the tool and workpiece	Decrease holder overhang	Decrease power and machine backlash
		Factors					Up ↗	Down ↘	Do not use water-soluble cutting fluid	Determine dry or wet cutting		Up ↗			Down ↘					
Deterioration of Tool Life	Insert wear quickly generated	Improper tool grade	●																	
		Improper cutting edge geometry									●	● ↗	● ↗	● ↗	● ↘					
		Improper cutting speed					● ↘	● ↗			● Wet									
	Chipping or fracturing of cutting edge	Improper tool grade		●																
		Improper cutting conditions						● ↘	● ↘											
		Lack of cutting edge strength.									●	● ↗		● ↗						
		Thermal crack occurs			●		● ↘	● ↘	● ↘	●	● Dry									
Build-up edge occurs				●		● ↗	● ↗		●	● Wet										
Lack of rigidity														●	●	●	●			
Out of Tolerance	Dimensions are not constant	Poor insert accuracy													●					
		Large cutting resistance and cutting edge flank									●	●	● ↘	● ↘	● ↘	●	●	●	●	
	Necessary to adjust often because of over-size	Improper tool grade	●																	
		Improper cutting conditions					● ↘	● ↗												
Deterioration of Surface Finish	Poor finished surface	Welding occurs					● ↗			● Wet										
		Improper cutting edge geometry									●	● ↗								
		Chattering					● ↘	● ↘	● ↘						●	●	●	●		
Generation of Heat	Workpiece over heating can cause poor accuracy and short life of insert	Improper cutting conditions					● ↘	● ↘	● ↘											
		Improper cutting edge geometry									●	● ↗		● ↘						

TECHNICAL DATA

Trouble		Solution	Insert Grade Selection				Cutting Conditions				Style and Design of the Tool					Machine, Installation of Tool						
			Factors	Select a harder grade	Select a tougher grade	Select a grade with better thermal shock resistance	Select a grade with better adhesion resistance	Cutting speed	Feed	Depth of cut	Coolant		Select chip breaker	Rake	Corner radius	Lead angle	Honing strengthens the cutting edge	Class of insert	Improve tool holder rigidity	Increase clamping rigidity of the tool and workpiece	Decrease holder overhang	Decrease power and machine backlash
Up ↗	Down ↘	Do not use water-soluble cutting fluid		Determine dry or wet cutting	Up ↗	Down ↘	Up ↗	Down ↘	Up ↗	Down ↘	Up ↗	Down ↘		Up ↗	Down ↘							
Burrs, Chipping etc.	Burrs (steel, aluminium)	Notch wear	●																			
		Improper cutting conditions					● ↘	● ↗			● Wet											
		Improper cutting edge geometry										●	● ↗	● ↘	● ↘	● ↘						
	Workpiece chipping (cast iron)	Improper cutting conditions					● ↘	● ↘														
		Improper cutting edge geometry										●	● ↗	● ↗	● ↗	● ↘						
		Vibration occurs															●	●	●	●		
	Burrs (mild steel)	Improper tool grade			●																	
		Improper cutting conditions					● ↗			●	● Wet											
		Improper cutting edge geometry										●	● ↗			● ↘						
		Vibration occurs															●	●	●	●		
Poor Chip Dispersal	long chips	Improper cutting conditions					● ↘	● ↗	● ↗		● Wet											
		Large chip control range										●										
		Improper cutting edge geometry											● ↘	● ↘								
	Chips are short and scattered	Improper cutting conditions					● ↘	● ↘			● Dry											
		Small chip control range										●										
		Improper cutting edge geometry											● ↗	● ↗								


CHIP CONTROL FOR TURNING

CHIP BREAKING CONDITIONS IN STEEL TURNING

Type	A Type	B Type	C Type	D Type	E Type
Small Depth of Cut $d < 7\text{mm}$					
Small Depth of Cut $d = 7 - 15\text{mm}$					
Curl Length l	Curless	$l \geq 50\text{mm}$	$l \leq 50\text{mm}$ 1-5 Curl	$\cong 1$ Curl	Less Than 1 Curl Half a Curl
Note	<ul style="list-style-type: none"> ● Irregular continuous shape ● Tangle around tool and workpiece 	<ul style="list-style-type: none"> ● Regular continuous shape ● Long chips 	Good	Good	<ul style="list-style-type: none"> ● Chip scattering ● Chattering ● Poor finished surface ● Maximum


Cutting speed and chip control range of chip breaker

In general, when cutting speed increases, the chip control range tends to become narrower.

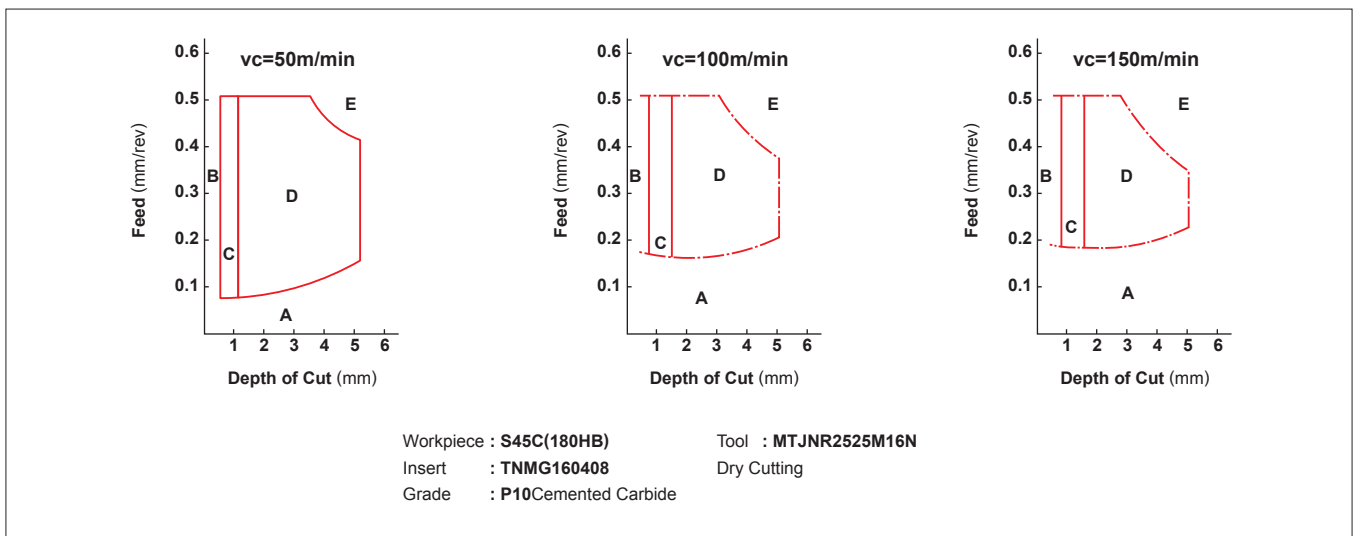

Effects of coolant on the chip control range of a chip breaker

If the cutting speed is the same, the range of chip control differs according to whether coolant is used or not.

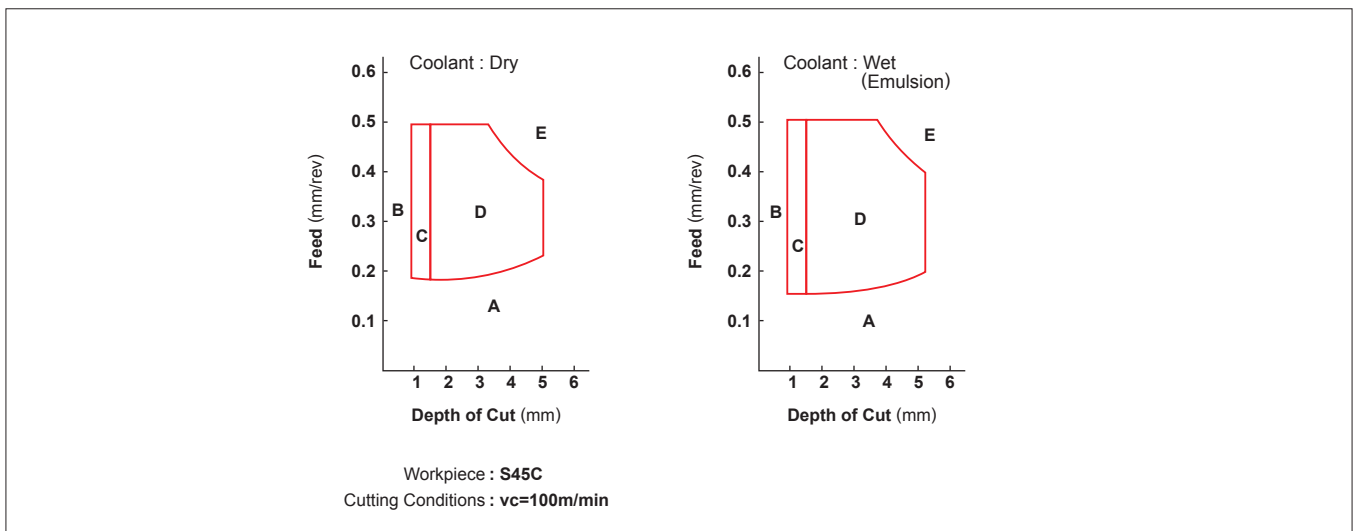




EFFECTS OF CUTTING CONDITIONS FOR TURNING

EFFECTS OF CUTTING CONDITIONS

Ideal conditions for cutting are short cutting time, long tool life, and high cutting accuracy. In order to obtain these conditions, selection of efficient cutting conditions and tools, based on work material, hardness, shape and machine capability is necessary.

CUTTING SPEED

Cutting speed effects tool life greatly. Increasing cutting speed increases cutting temperature and results in shortening tool life. Cutting speed varies depending on the type and hardness of the work material. Selecting a tool grade suitable for the cutting speed is necessary.

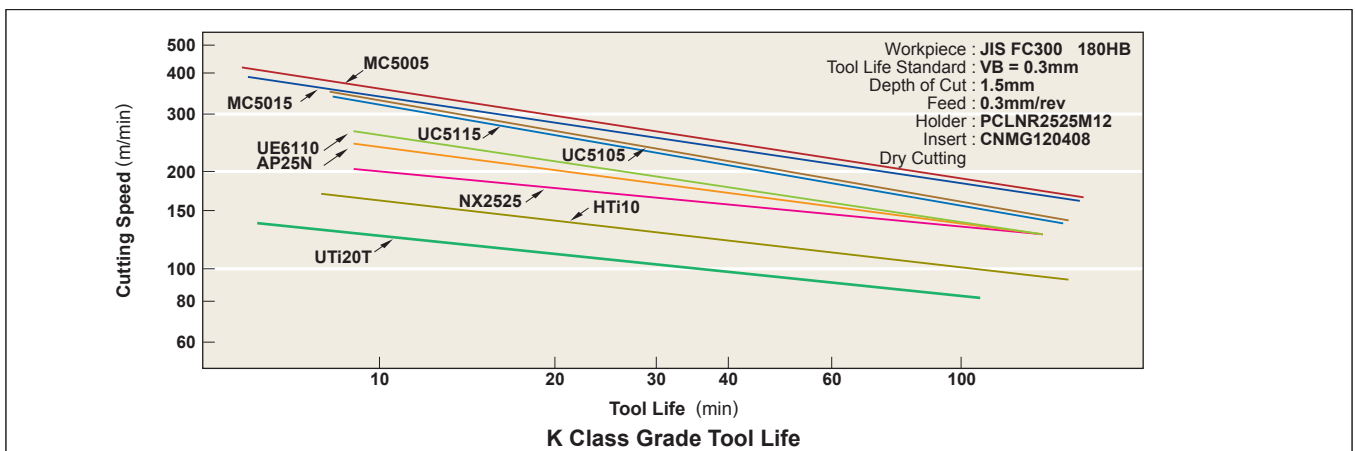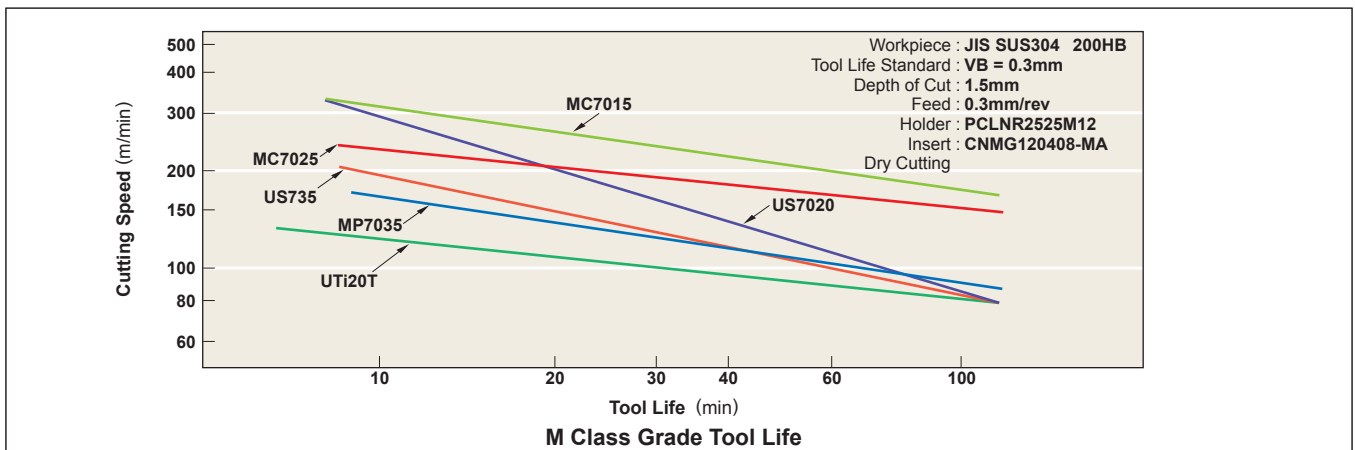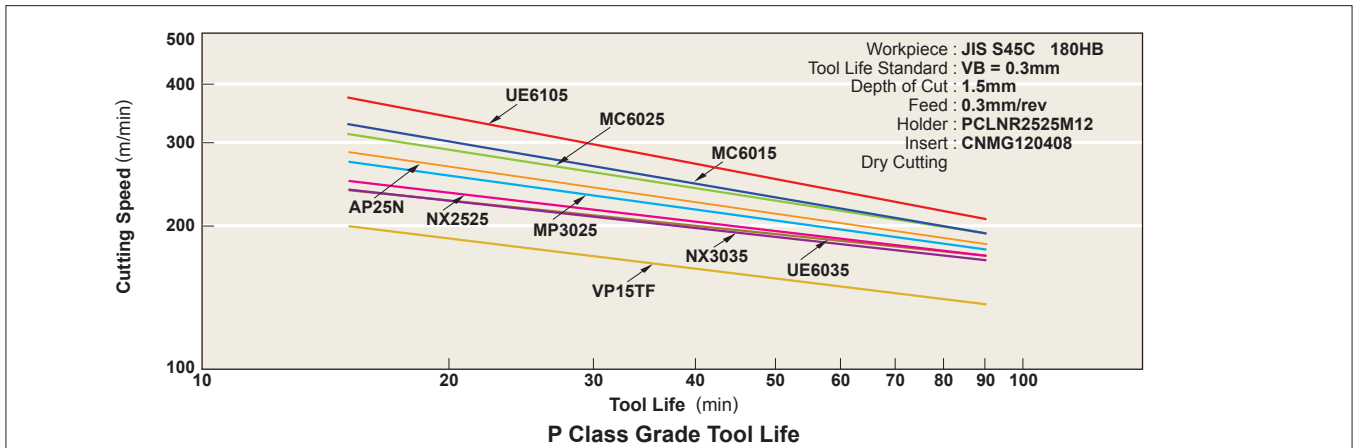

Effects of Cutting Speed

1. Increasing cutting speed by 20% decreases tool life by 50%. Increasing cutting speed by 50% decreases tool life by 80%.
2. Cutting at low cutting speed (20–40m/min) tends to cause chattering. Thus, tool life is shortened.


EFFECTS OF CUTTING CONDITIONS FOR TURNING

FEED

When cutting with a general type holder, feed is the distance a holder moves per workpiece revolution. When milling, feed is the distance a machine table moves per cutter revolution divided by the number of inserts. Thus, it is indicated as feed per tooth. Feed rate relates to finished surface roughness.

Effects of Feed

1. Decreasing feed rate results in flank wear and shortens tool life.
2. Increasing feed rate increases cutting temperature and flank wear. However, effects on the tool life is minimal compared to cutting speed.
3. Increasing feed rate improves machining efficiency.


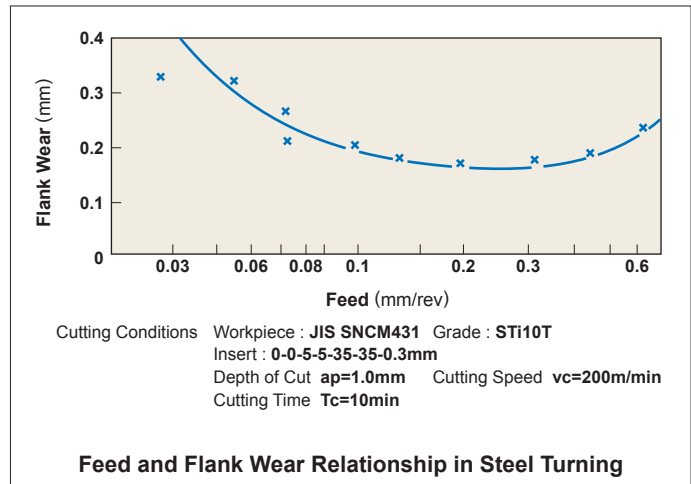


DEPTH OF CUT

Depth of cut is determined according to the required stock removal, shape of workpiece, power and rigidity of the machine and tool rigidity.

Effects of Depth of Cut



1. Changing depth of cut doesn't effect tool life greatly.
2. Small depths of cut result in friction when cutting the hardened layer of a workpiece. Thus tool life is shortened.
3. When cutting uncut surfaces or cast iron surfaces, the depth of cut needs to be increased as much as the machine power allows in order to avoid cutting impure hard layers with the tip of cutting edge to prevent chipping and abnormal wear.

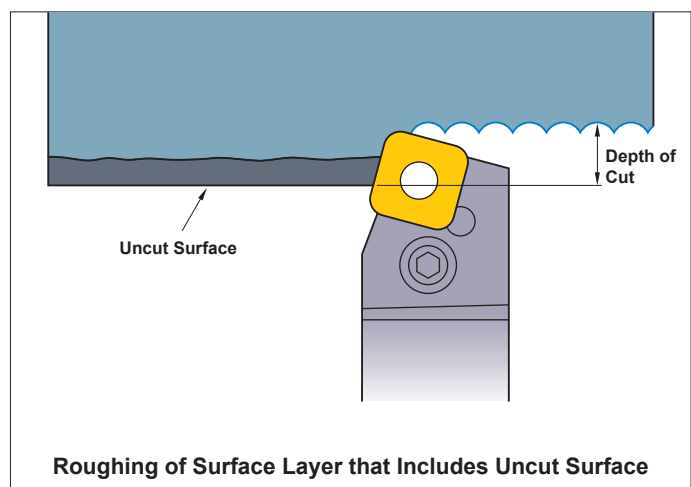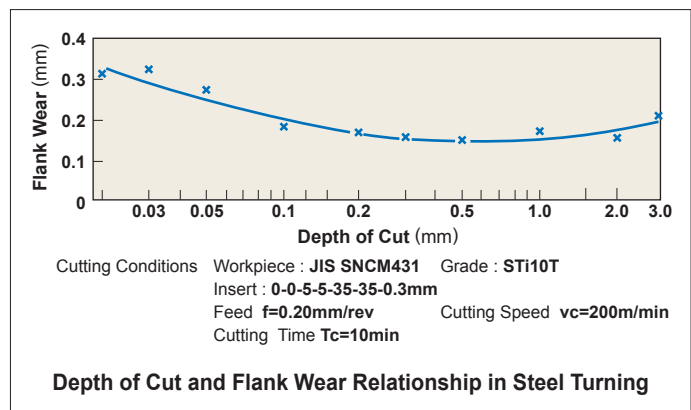

FUNCTION OF TOOL FEATURES FOR TURNING

RAKE ANGLE

Rake angle is cutting edge angle that has a large effect on cutting resistance, chip disposal, cutting temperature and tool life.

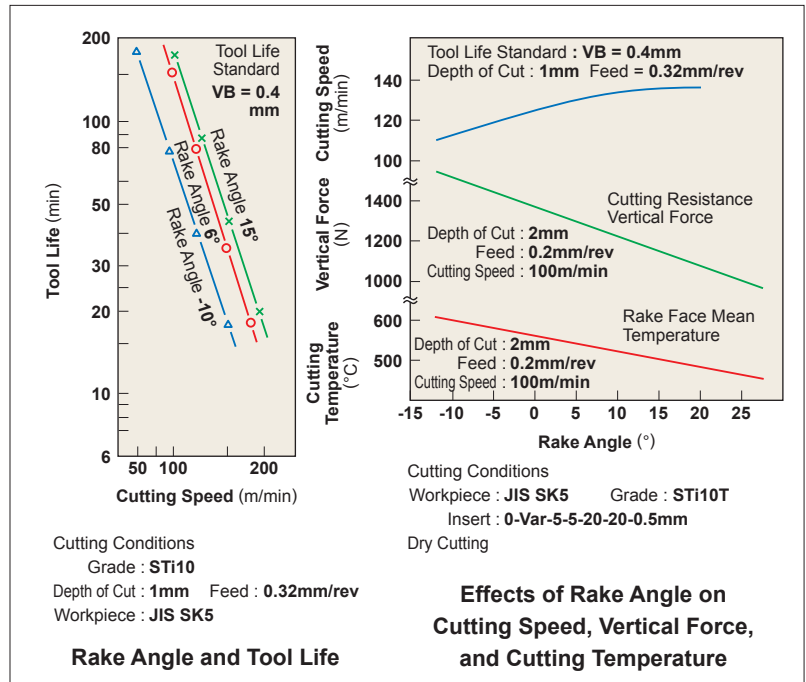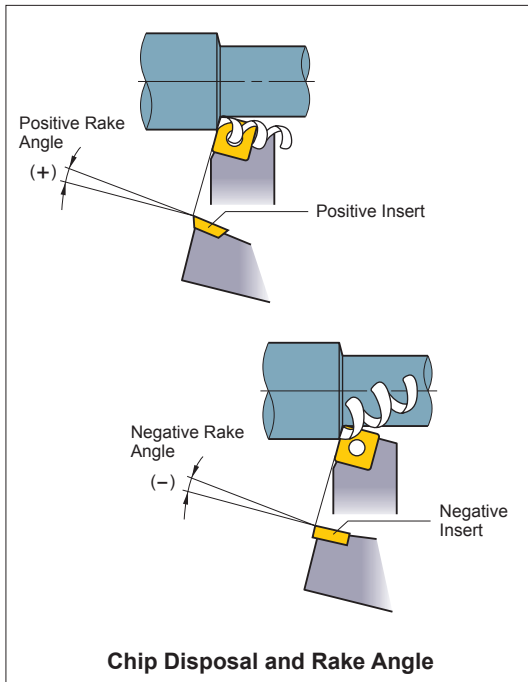

Effects of Rake Angle

1. Increasing rake angle in the positive (+) direction improves sharpness.
2. Increasing rake angle by 1° in the positive (+) direction decreases cutting power by about 1%.
3. Increasing rake angle in the positive (+) direction lowers cutting edge strength and in the negative (-) direction increases cutting resistance.

When to Increase Rake Angle in the Negative (-) Direction



- Hard workpieces.
- When the cutting edge strength is required such as for uncut surfaces and interrupted cutting.

When to Increase Rake Angle in the Positive (+) Direction

- Soft workpieces.
- Workpiece is easily machined.
- When the workpiece or the machine have poor rigidity.

FLANK ANGLE

Flank angle prevents friction between flank face and workpiece resulting in smooth feed.

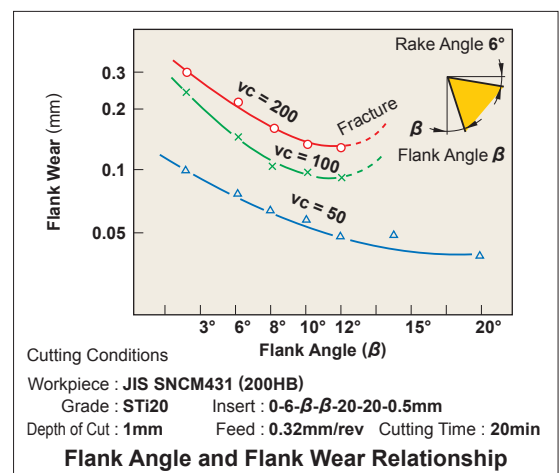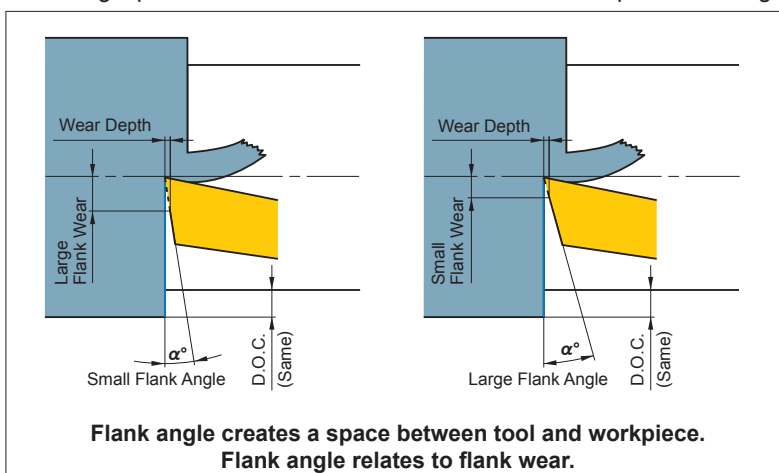

Effects of Rake Angle

1. Increasing flank angle decreases flank wear occurrence.
2. Increasing flank angle lowers cutting edge strength.

When to Decrease Flank Angle

- Hard workpieces.
- When cutting edge strength is required.



When to Increase Flank Angle

- Soft workpieces.
- Workpieces suffer from work hardening easily.

FUNCTION OF TOOL FEATURES FOR TURNING

SIDE CUTTING EDGE ANGLE (LEAD ANGLE)

The side cutting edge angle reduces impact load and effects the amount of feed force, back force and chip thickness.

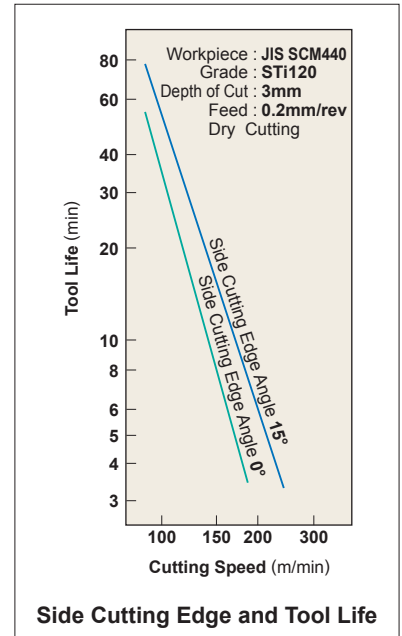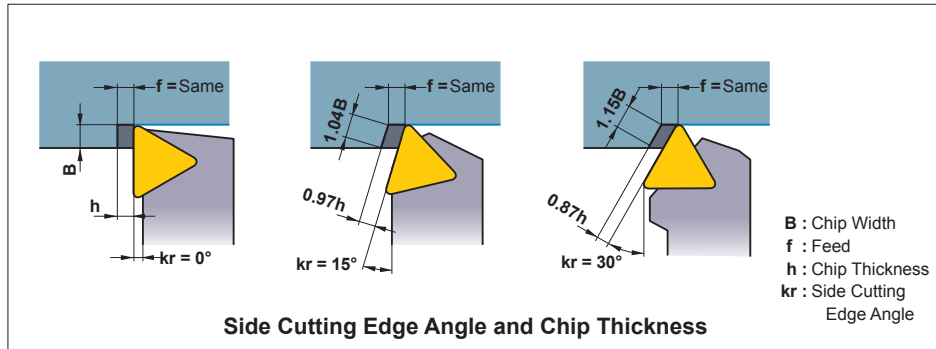

Effects of Side Cutting Edge Angle (Lead Angle)


1. At the same feed rate, increasing the side cutting edge angle increases the chip contact length and decreases chip thickness. As a result, the cutting force is dispersed on a longer cutting edge and tool life is prolonged. (Refer to the chart.)
2. Increasing the side cutting edge angle increases force a' . Thus, thin, long workpieces suffer from bending in some cases.
3. Increasing the side cutting edge angle decreases chip control.
4. Increasing the side cutting edge angle decreases the chip thickness and increases chip width. Thus, breaking chips is difficult.

When to Decrease Lead Angle

- Finishing with small depth of cut.
- Thin, long workpieces.
- When the machine has poor rigidity.

When to Increase Lead Angle

- Hard workpieces which produce high cutting temperature.
- When roughing a workpiece with large diameter.
- When the machine has high rigidity.

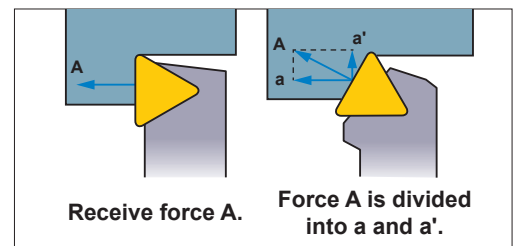


END CUTTING EDGE ANGLE

The end cutting edge angle avoids interference between the machined surface and the tool (end cutting edge). Usually $5^\circ - 15^\circ$.

Effects of End Cutting Edge Angle

1. Decreasing the end cutting edge angle increases cutting edge strength, but it also increases cutting edge temperature.
2. Decreasing the end cutting edge angle increases the back force and can result in chattering and vibration while machining.
3. Small end cutting edge angle for roughing and large angle for finishing are recommended.

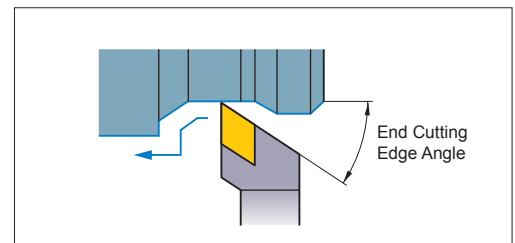


CUTTING EDGE INCLINATION

Cutting edge inclination indicates inclination of the rake face. During heavy cutting, the cutting edge receives an extremely large shock at the beginning of each cut. Cutting edge inclination keeps the cutting edge from receiving this shock and prevents fracturing. $3^\circ - 5^\circ$ in turning and $10^\circ - 15^\circ$ in milling are recommended.



Effects of Cutting Edge Inclination

1. Negative (-) cutting edge inclination disposes chips in the workpiece direction, and positive (+) disposes chips in the opposite direction.
2. Negative (-) cutting edge inclination increases cutting edge strength, but it also increases the back force of cutting resistance. Thus, chattering can easily occur.

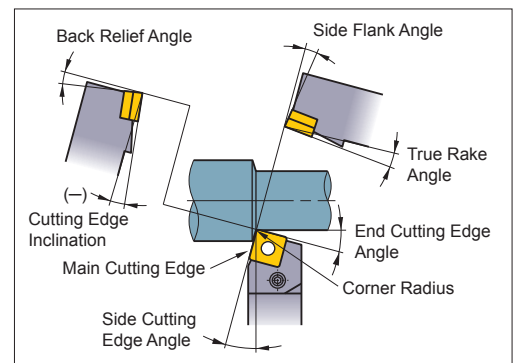

HONING AND LAND

Honing and land are cutting edge shapes that maintain cutting edge strength. Honing can be round or chamfer type. The optimal honing width is approximately 1/2 of the feed. Land is the narrow flat area on the rake or flank face.

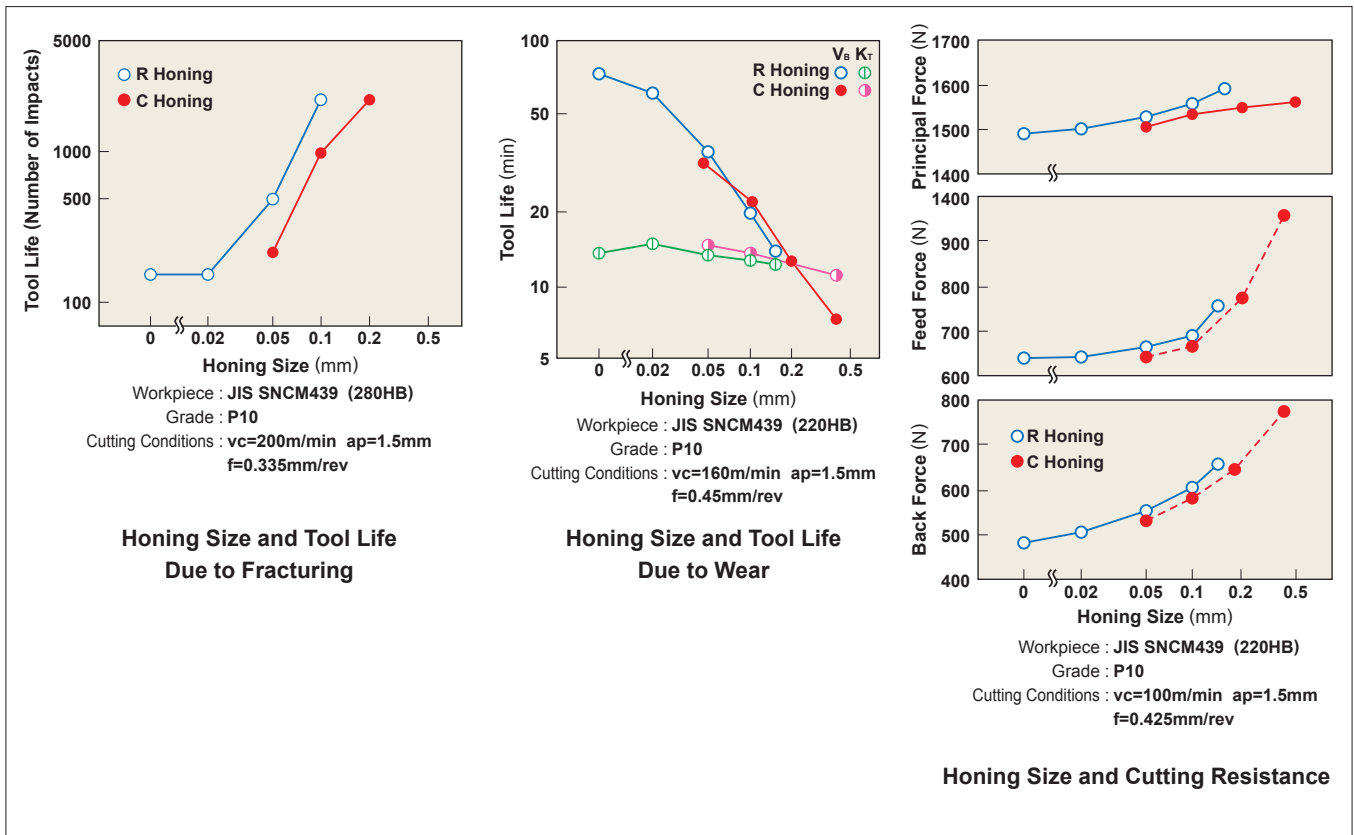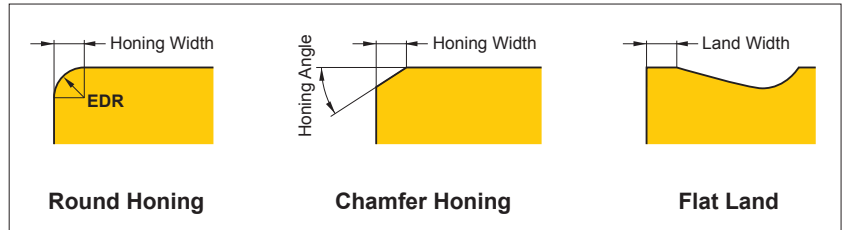

Effects of Honing

1. Enlarging the honing increases cutting edge strength, tool life and reduces fracturing.
2. Enlarging the honing increases flank wear occurrence and shortens tool life. Honing size doesn't affect rake wear.
3. Enlarging the honing increases cutting resistance and chattering.

When to Decrease Honing Size

- When finishing with small depth of cut and small feed.
- Soft workpieces.
- When the workpiece or the machine have poor rigidity.

When to Increase Honing Size




- Hard workpieces.
- When the cutting edge strength is required such as for uncut surfaces and interrupted cutting.
- When the machine has high rigidity.

*Cemented carbide, coated diamond, and indexable cermet inserts have round honing as standard.

FUNCTION OF TOOL FEATURES FOR TURNING

RADIUS

Radius effects the cutting edge strength and finished surface. In general, a corner radius 2–3 times the feed is recommended.

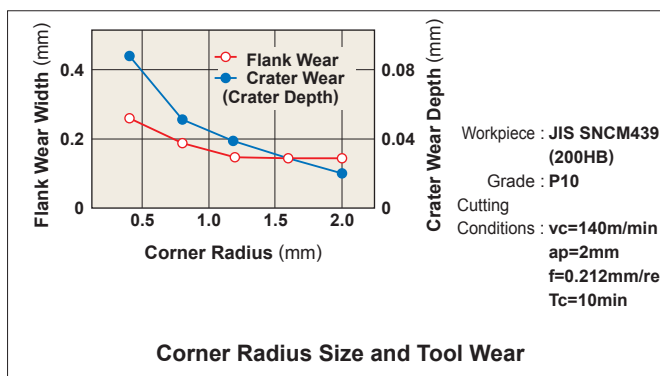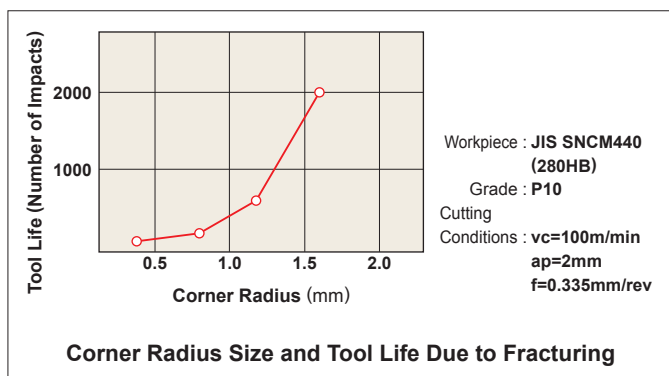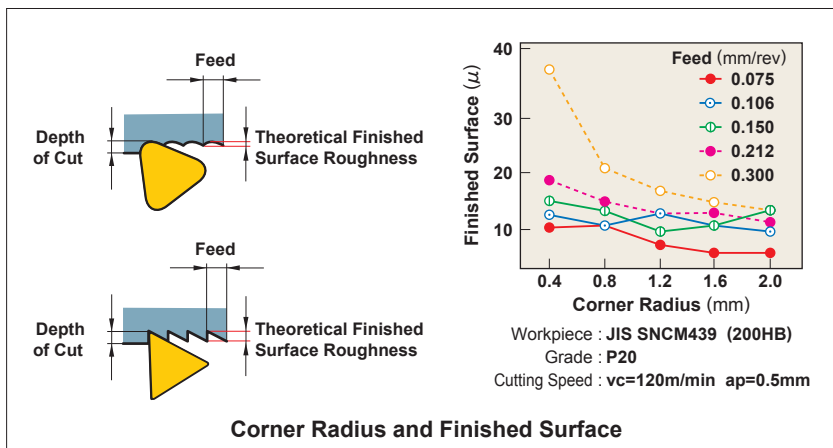

Effects of Corner Radius

1. Increasing the corner radius improves the surface finish.
2. Increasing the corner radius improves cutting edge strength.
3. Increasing the corner radius too much increases the cutting resistance and causes chattering.
4. Increasing the corner radius decreases flank and rake wear.
5. Increasing the corner radius too much results in poor chip control.


When to Decrease Corner Radius

- Finishing with small depth of cut.
- Thin, long workpieces.
- When the machine has poor rigidity.

When to Increase Corner Radius

- When the cutting edge strength is required such as in interrupted cutting and uncut surface cutting.
- When roughing a workpiece with large diameter.
- When the machine has high rigidity.

Corner Radius and Chip Control Range

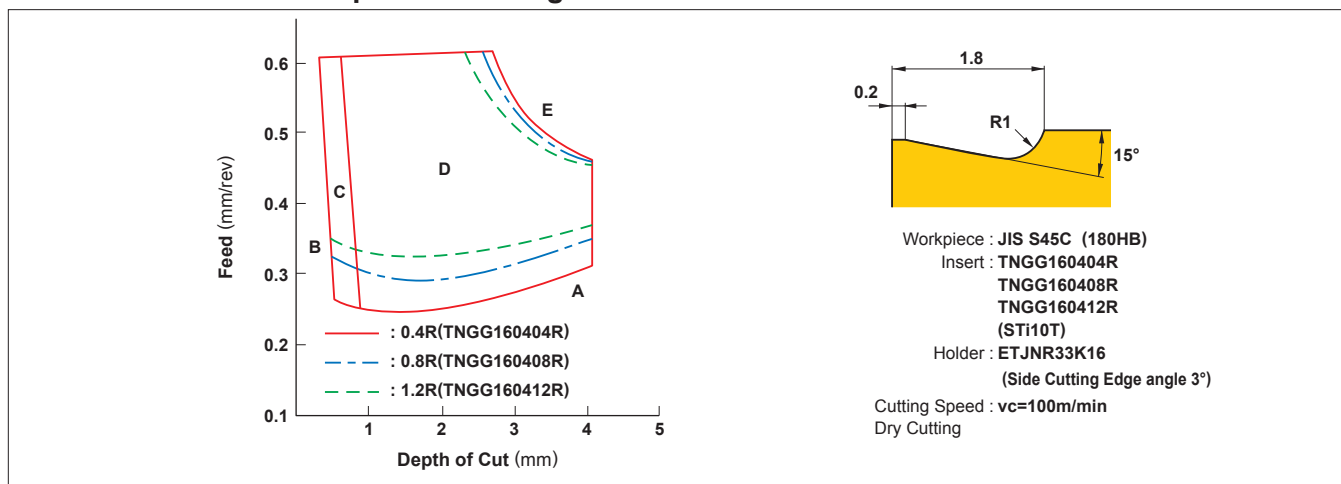

(Note) Please refer to page Q004 for chip shapes (A, B, C, D, E).

FORMULAE FOR CUTTING POWER

CUTTING POWER (P_c)

$$P_c = \frac{ap \cdot f \cdot vc \cdot K_c}{60 \times 10^3 \times \eta} \text{ (kW)}$$

P_c (kW) : Actual Cutting Power
 f (mm/rev) : Feed per Revolution
 K_c (MPa) : Specific Cutting Force

ap (mm) : Depth of Cut
 vc (m/min) : Cutting Speed
 η : (Machine Coefficient)

(Problem) What is the cutting power required for machining mild steel at cutting speed 120m/min with depth of cut 3mm and feed 0.2mm/rev (Machine coefficient 80%) ?

(Answer) Substitute the specific cutting force $K_c=3100$ MPa into the formula.

$$P_c = \frac{3 \times 0.2 \times 120 \times 3100}{60 \times 10^3 \times 0.8} = 4.65 \text{ (kW)}$$

K_c

Work Material	Tensile Strength(MPa) and Hardness	Specific Cutting Force K _c (MPa)				
		0.1 (mm/rev)	0.2 (mm/rev)	0.3 (mm/rev)	0.4 (mm/rev)	0.6 (mm/rev)
Mild Steel	520	3610	3100	2720	2500	2280
Medium Steel	620	3080	2700	2570	2450	2300
Hard Steel	720	4050	3600	3250	2950	2640
Tool Steel	670	3040	2800	2630	2500	2400
Tool Steel	770	3150	2850	2620	2450	2340
Chrome Manganese Steel	770	3830	3250	2900	2650	2400
Chrome Manganese Steel	630	4510	3900	3240	2900	2630
Chrome Molybdenum Steel	730	4500	3900	3400	3150	2850
Chrome Molybdenum Steel	600	3610	3200	2880	2700	2500
Nickel Chrome Molybdenum Steel	900	3070	2650	2350	2200	1980
Nickel Chrome Molybdenum Steel	352HB	3310	2900	2580	2400	2200
Hard Cast Iron	46HRC	3190	2800	2600	2450	2270
Meehanite Cast Iron	360	2300	1930	1730	1600	1450
Grey Cast Iron	200HB	2110	1800	1600	1400	1330

CUTTING SPEED (vc)

$$vc = \frac{\pi \cdot D_m \cdot n}{1000} \text{ (m/min)}$$

vc (m/min) : Cutting Speed
 D_m (mm) : Workpiece Diameter
 π (3.14) : Pi
 n (min⁻¹) : Main Axis Spindle Speed


*Divide by 1000 to change to m from mm.

(Problem) What is the cutting speed when main axis spindle speed is 700min⁻¹ and external diameter is $\phi 50$?

(Answer) Substitute $\pi=3.14$, $D_m=50$, $n=700$ into the formula.

$$vc = \frac{\pi \cdot D_m \cdot n}{1000} = \frac{3.14 \times 50 \times 700}{1000} = 110 \text{ m/min}$$

Cutting speed is 110m/min.



FEED (f)

$$f = \frac{l}{n} \text{ (mm/rev)}$$


f (mm/rev) : Feed per Revolution
 l (mm/min) : Cutting Length per Min.
 n (min⁻¹) : Main Axis Spindle Speed

(Problem) What is the feed per revolution when main axis spindle speed is 500min⁻¹ and cutting length per minute is 120mm/min ?

(Answer) Substitute $n=500$, $l=120$ into the formula.

$$f = \frac{l}{n} = \frac{120}{500} = 0.24 \text{ mm/rev}$$

The answer is 0.24mm/rev.



CUTTING TIME (T_c)

$$T_c = \frac{l_m}{l} \text{ (min)}$$

T_c (min) : Cutting Time
 l_m (mm) : Workpiece Length
 l (mm/min) : Cutting Length per Min.

(Problem) What is the cutting time when 100mm workpiece is machined at 1000min⁻¹ with feed = 0.2mm/rev ?

(Answer) First, calculate the cutting length per min. from the feed and spindle speed.

$$l = f \times n = 0.2 \times 1000 = 200 \text{ mm/min}$$

Substitute the answer above into the formula.

$$T_c = \frac{l_m}{l} = \frac{100}{200} = 0.5 \text{ min}$$

0.5 x 60=30 (sec.) The answer is 30 sec.

THEORETICAL FINISHED SURFACE ROUGHNESS (h)

$$h = \frac{f^2}{8RE} \times 1000 (\mu\text{m})$$


h (μm) : Finished Surface Roughness
 f (mm/rev) : Feed per Revolution
 RE (mm) : Insert Corner Radius

(Problem) What is the theoretical finished surface roughness when the insert corner radius is 0.8mm and feed is 0.2mm/rev ?

(Answer) Substitute $f=0.2$ mm/rev, $RE=0.8$ into the formula.

$$h = \frac{0.2^2}{8 \times 0.8} \times 1000 = 6.25 \mu\text{m}$$

The theoretical finished surface roughness is 6 μm .

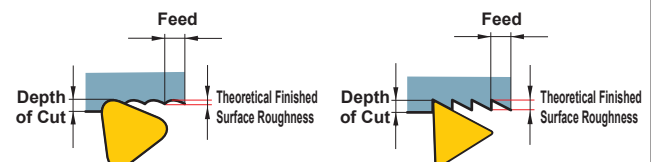


TROUBLE SHOOTING FOR FACE MILLING

Solution		Insert Grade Selection				Cutting Conditions				Style and Design of the Tool							Machine, Installation of Tool							
		Select a harder grade	Select a tougher grade	Select a grade with better thermal shock resistance	Select a grade with better adhesion resistance	Cutting speed	Feed	Depth of cut	Engage angle	Coolant		Rake	Corner angle	Honing strengthens the cutting edge	Cutter diameter	Number of teeth	Wider chip pocket	Use of a wiper insert	Improve run-out accuracy	Cutter rigidity	Increase clamping rigidity of the tool and workpiece	Decrease overhang	Decrease power and machine backlash	
Trouble	Factors					Up ↗	Down ↘	Up ↗	Do not use water-soluble cutting fluid	Determine dry or wet cutting	Up ↗	Down ↘	Smaller ↘	Larger ↗	Wider chip pocket	Use of a wiper insert	Improve run-out accuracy	Cutter rigidity	Increase clamping rigidity of the tool and workpiece	Decrease overhang	Decrease power and machine backlash			
		Deterioration of Tool Life	Insert wear quickly generated	Improper tool grade	●																			
Improper cutting edge geometry																								
Improper cutting speed						●																		
Chipping or fracturing of cutting edge	Improper tool grade			●																				
	Improper cutting conditions							●																
	Lack of cutting edge strength																							
	Thermal crack occurs			●																				
Deterioration of Surface Finish	Poor finished surface	Improper cutting conditions		●																				
		Welding occurs																						
		Poor run-out accuracy																						
	Not parallel or irregular surface	Chattering																						
Workpiece bending																								
Tool clearance																								
Burr, Workpiece Chipping	Burs, chipping	Large back force																						
		Chip thickness is too large																						
		Cutter diameter is too large																						
	Workpiece edge chipping	Low sharpness																						
A large corner angle																								
Improper cutting conditions																								
Low sharpness																								
Chip Control	Poor chip dispersal, chip jamming and chip packing	A small corner angle																						
		Chattering																						
		Welding occurs																						
		Chip thickness is too thin																						
Chip Control	Poor chip dispersal, chip jamming and chip packing	Cutter diameter is too small																						
		Poor chip disposal																						

FUNCTION OF TOOL FEATURES FOR FACE MILLING

FUNCTION OF EACH CUTTING EDGE ANGLE IN FACE MILLING

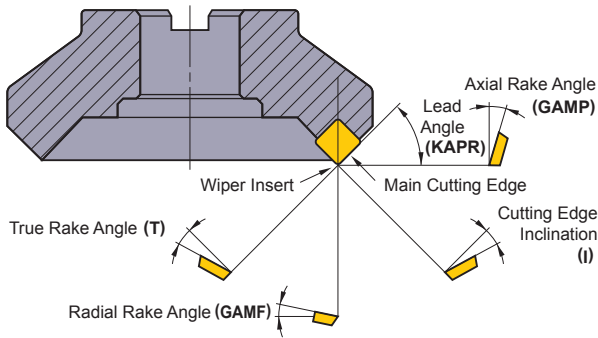


Each Cutting Edge Angle in Face Milling

Type of Angle	Symbol	Function	Effect
Axial Rake Angle	GAMP	Determines chip disposal direction.	Positive : Excellent machinability.
Radial Rake Angle	GAMF	Determines sharpness.	Negative : Excellent chip disposal.
Lead Angle	KAPR	Determines chip thickness.	Small : Thin chips and small cutting impact. Large back force.
True Rake Angle	T	Determines actual sharpness.	Positive (large) : Excellent machinability. Minimal welding. Negative (large) : Poor machinability. Strong cutting edge.
Cutting Edge Inclination	I	Determines chip disposal direction.	Positive (large) : Excellent chip disposal. Low cutting edge strength.

STANDARD INSERTS

Positive and Negative Rake Angle

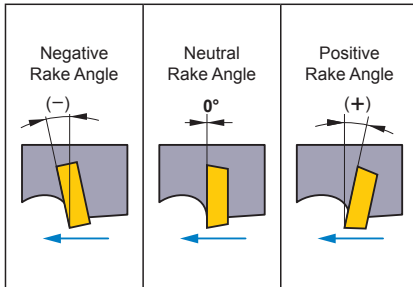


- Insert shape whose cutting edge precedes is a positive rake angle.
- Insert shape whose cutting edge follows is a negative rake angle.

Standard Cutting Edge Shape


Standard Cutting Edge Combinations	(+) Axial Rake Angle	(-) Axial Rake Angle	(+) Axial Rake Angle
	Radial Rake Angle (+)	Radial Rake Angle (-)	Radial Rake Angle (-)
	Double Positive (DP Edge Type)	Double Negative (DN Edge Type)	Negative/Positive (NP Edge Type)
Axial Rake Angle (GAMP)	Positive (+)	Negative (-)	Positive (+)
Radial Rake Angle (GAMF)	Positive (+)	Negative (-)	Negative (-)
Insert Used	Positive Insert (One Sided Use)	Negative Insert (Double Sided Use)	Positive Insert (One Sided Use)
Work Material	Steel	●	●
	Cast Iron	-	●
	Aluminium Alloy	●	-
	Difficult-to-Cut Material	●	●

LEAD ANGLE (KAPR) AND CUTTING CHARACTERISTICS

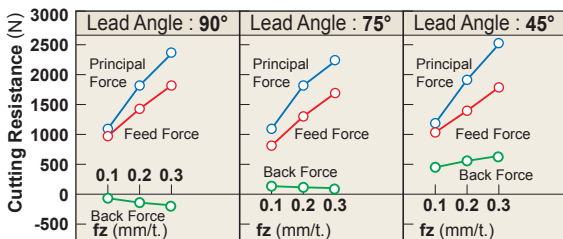

Workpiece : JIS SCM440 (281HB)
Tool : $\phi 125$ mm Single Insert
Cutting Conditions : $vc=125.6$ m/min $ap=4$ mm $ae=110$ mm


Cutting Resistance Comparison between Different Insert Shapes

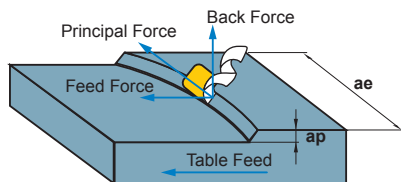

Three Cutting Resistance Forces in Milling


Lead Angle 90°

Back force is in the minus direction. Lifts the workpiece when workpiece clamp rigidity is low.




Lead Angle 75°

Lead angle 75° is recommended for face milling of workpieces with low rigidity such as thin workpieces.



Lead Angle 45°

The largest back force. Bends thin workpieces and lowers cutting accuracy.
*Prevents workpiece edge chipping when cast iron cutting.




- * Principal force : Force is in the opposite direction of face milling rotation.
- * Back force : Force that pushes in the axial direction.
- * Feed force : Force is in the feed direction and is caused by table feed.

FUNCTION OF TOOL FEATURES FOR FACE MILLING

APPROACH ANGLE AND THE TOOL LIFE

Approach Angle and Chip Thickness

When the depth of cut and feed per tooth, f_z , are fixed, the smaller the corner angle (KAPR) is, then the thinner the chip thickness (h) becomes (for a 45° KAPR, it is approx. 75% that of a 90° KAPR). This can be seen in below. Therefore as the KAPR increases, the cutting resistance decreases resulting in longer tool life. Note however, if the chip thickness is too large then the cutting resistance can increase leading to vibrations and shortened tool life.

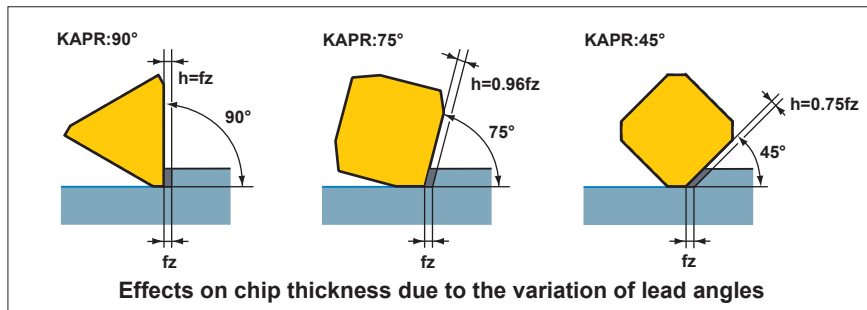

Approach Angle and Face Wear


Below shows wear patterns for different lead angles. When comparing crater wear for 90° and 45° lead angles, it can be clearly seen that the crater wear for 90° lead angle is larger.

	Lead Angle 90°	Lead Angle 75°	Lead Angle 45°
vc=100m/min Tc=69min			
vc=125m/min Tc=55min			
vc=160m/min Tc=31min			

Workpiece : **SNCM439 287HB**
 Tools : **DC=125mm**
 Insert : **M20Cemented Carbide**
 Cutting Conditions : **ap=3.0mm**
 ae=110mm
 fz=0.2mm/t.
 Dry Cutting


UP AND DOWN CUT (CLIMB) MILLING

When choosing a method to machine, up cutting or down cut milling (climb milling) is decided by the conditions of the machine tool, the milling cutter and the application. However, it is said that in terms of tool life, down cut (climb) milling is more advantageous.

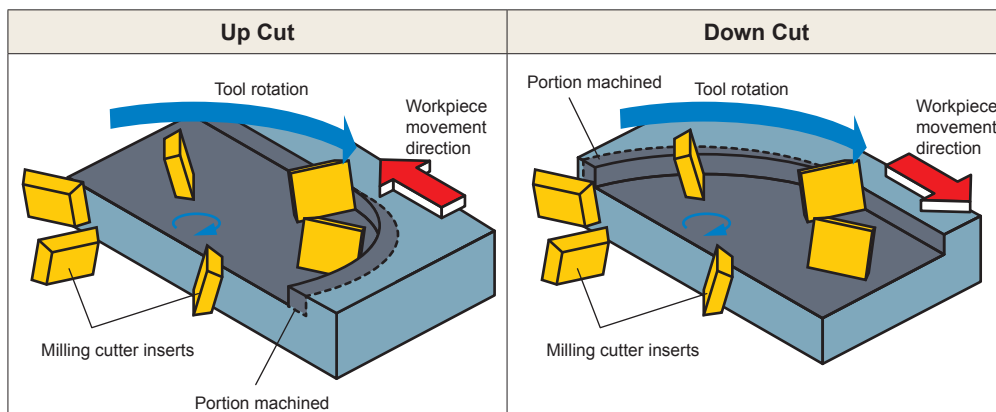


FINISHED SURFACE


Cutting Edge Run-out Accuracy

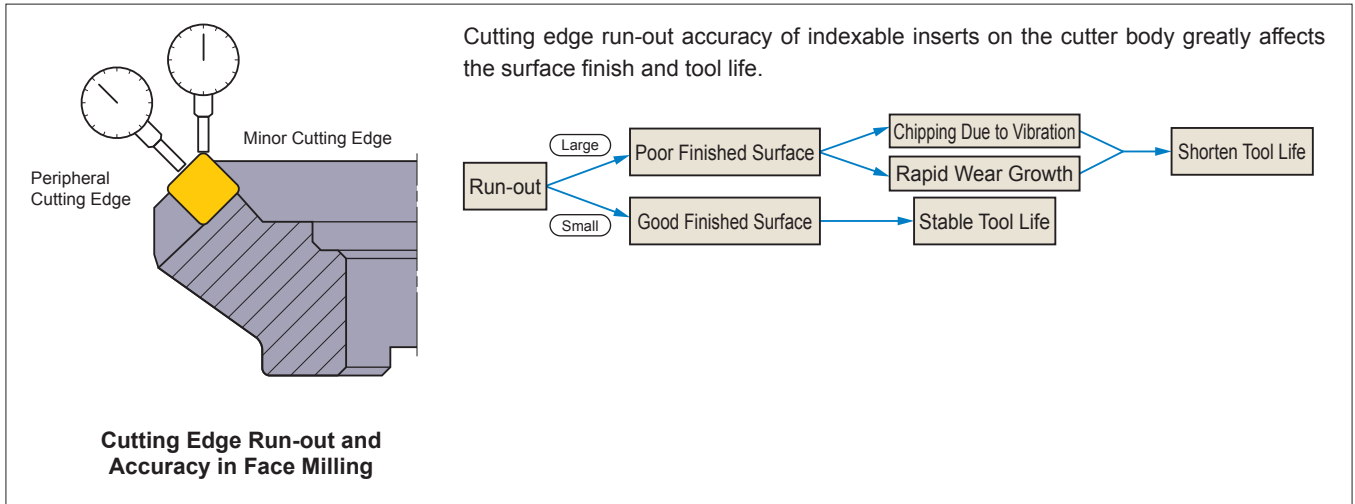

Improve Finished Surface Roughness

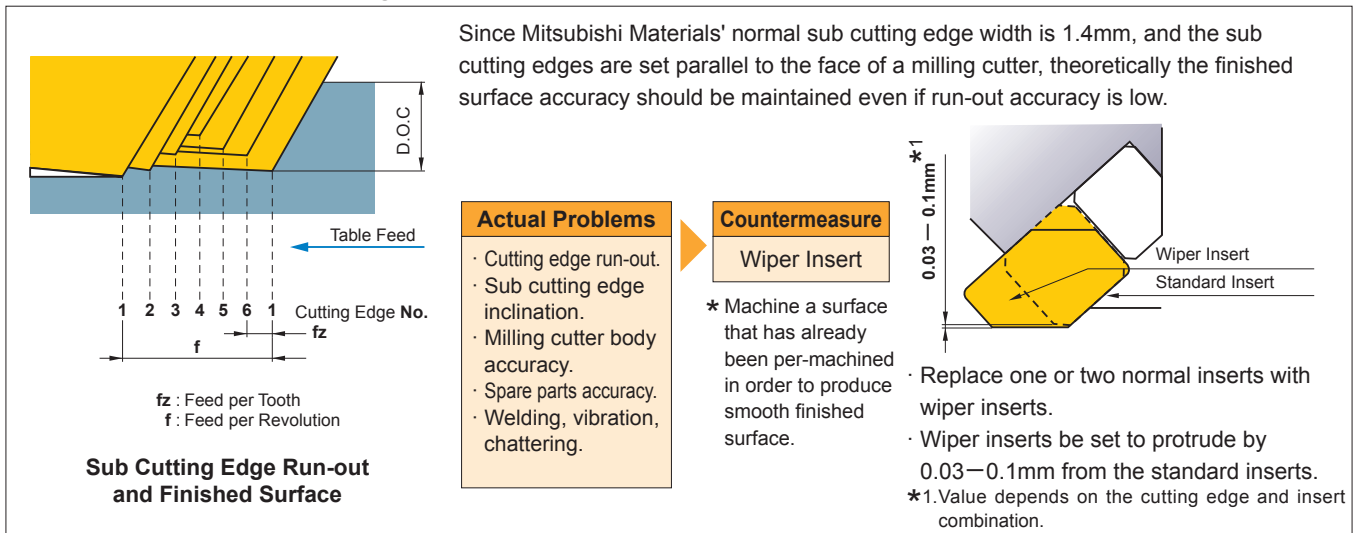

How to Set a Wiper Insert

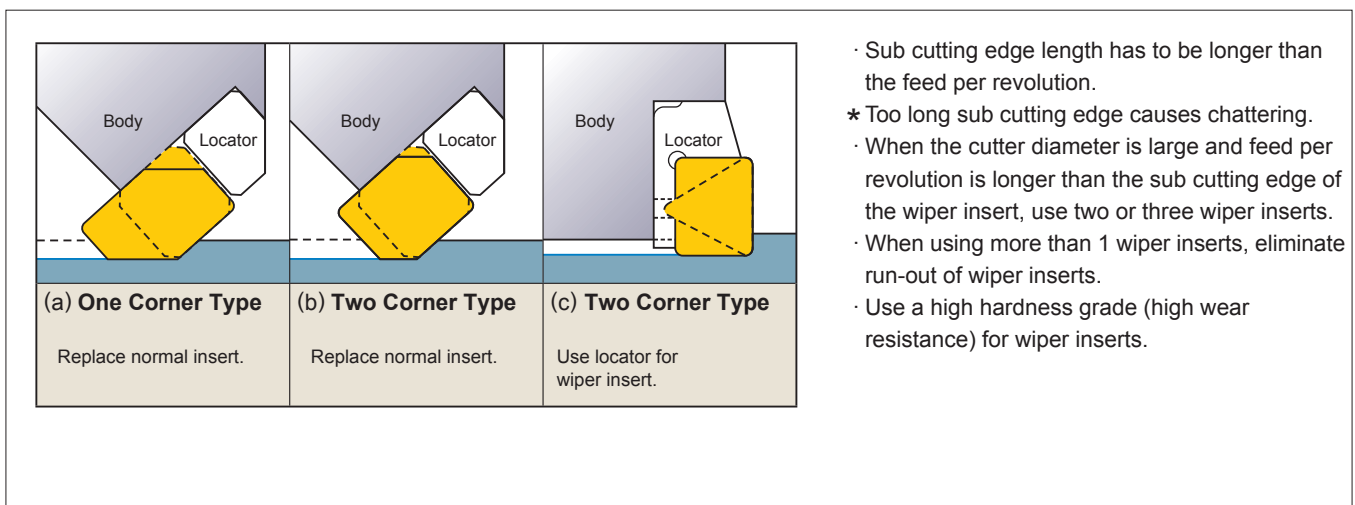

FORMULAE FOR FACE MILLING


CUTTING SPEED (vc)

$$vc = \frac{\pi \cdot DC \cdot n}{1000} \text{ (m/min)}$$

vc (m/min) : Cutting Speed
 π (3.14) : Pi

DC (mm) : Cutter Diameter
 n (min⁻¹) : Main Axis Spindle Speed

*Divide by 1000 to change to m from mm.



(Problem) What is the cutting speed when main axis spindle speed is 350min⁻¹ and the cutter diameter is ϕ 125 ?

(Answer) Substitute $\pi=3.14$, DC=125, n=350 into the formula.

$$vc = \frac{\pi \cdot DC \cdot n}{1000} = \frac{3.14 \times 125 \times 350}{1000} = 137.4 \text{ m/min}$$

The cutting speed is 137.4m/min.

FEED PER TOOTH (fz)


$$fz = \frac{vf}{z \cdot n} \text{ (mm/tooth)}$$

fz (mm/tooth) : Feed per Tooth

z : Insert Number

vf (mm/min) : Table Feed per Min.

n (min⁻¹) : Main Axis Spindle Speed (Feed per Revolution $f = z \times fz$)

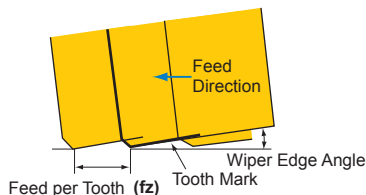

(Problem) What is the feed per tooth when the main axis spindle speed is 500min⁻¹, number of insert is 10, and table feed is 500mm/min ?

(Answer) Substitute the above figures into the formula.

$$fz = \frac{vf}{z \cdot n} = \frac{500}{10 \times 500} = 0.1 \text{ mm/tooth}$$

The answer is 0.1mm/tooth.

TABLE FEED (vf)


$$vf = fz \cdot z \cdot n \text{ (mm/min)}$$

vf (mm/min) : Table Feed per Min.

z : Insert Number

fz (mm/tooth) : Feed per Tooth

n (min⁻¹) : Main Axis Spindle Speed



(Problem) What is the table feed when feed per tooth is 0.1mm/tooth, number of insert is 10, and main axis spindle speed is 500min⁻¹?

(Answer) Substitute the above figures into the formula.

$$vf = fz \cdot z \cdot n = 0.1 \times 10 \times 500 = 500 \text{ mm/min}$$

The table feed is 500mm/min.


CUTTING TIME (Tc)

$$Tc = \frac{L}{vf} \text{ (min)}$$

Tc (min) : Cutting Time

vf (mm/min) : Table Feed per Min.

L (mm) : Total Table Feed Length (Workpiece Length: (l))+Cutter Diameter : (DC))

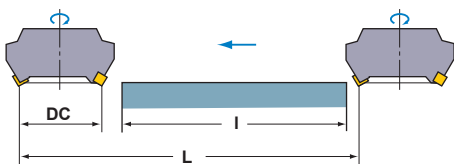

(Problem) What is the cutting time required for finishing 100mm width and 300mm length surface of a cast iron (JIS FC200) block when the cutter diameter is ϕ 200mm, the number of inserts is 16, the cutting speed is 125m/min, and feed per tooth is 0.25mm. (spindle speed is 200min⁻¹)

(Answer) Calculate table feed per min $vf=0.25 \times 16 \times 200=800$ mm/min

Calculate total table feed length. $L=300+200=500$ mm

Substitute the above answers into the formula.

$$Tc = \frac{500}{800} = 0.625 \text{ (min)}$$

$0.625 \times 60=37.5$ (sec). The answer is 37.5 sec.

CUTTING POWER (P_c)

$$P_c = \frac{a_p \cdot a_e \cdot v_f \cdot K_c}{60 \times 10^6 \cdot \eta}$$

P_c (kW) : Actual Cutting Power
a_e (mm) : Cutting Width
K_c (MPa) : Specific Cutting Force

a_p (mm) : Depth of Cut
v_f (mm/min) : Table Feed per Min.
η : (Machine Coefficient)

(Problem) What is the cutting power required for milling tool steel at a cutting speed of 80m/min. With depth of cut 2mm, cutting width 80mm, and table feed 280mm/min by ϕ 250 cutter with 12 inserts. Machine coefficient 80%.

(Answer) First, calculate the spindle speed in order to obtain feed per tooth.

$$n = \frac{1000vc}{\pi DC} = \frac{1000 \times 80}{3.14 \times 250} = 101.91 \text{ min}^{-1}$$

$$\text{Feed per Tooth } fz = \frac{vf}{z \times n} = \frac{280}{12 \times 101.9} = 0.228 \text{ mm/tooth}$$

Substitute the specific cutting force into the formula.

$$P_c = \frac{2 \times 80 \times 280 \times 1800}{60 \times 10^6 \times 0.8} = 1.68 \text{ kW}$$

K_c




Work Material	Tensile Strength (MPa) and Hardness	Specific Cutting Force K _c (MPa)				
		0.1mm/tooth	0.2mm/tooth	0.3mm/tooth	0.4mm/tooth	0.6mm/tooth
Mild Steel	520	2200	1950	1820	1700	1580
Medium Steel	620	1980	1800	1730	1600	1570
Hard Steel	720	2520	2200	2040	1850	1740
Tool Steel	670	1980	1800	1730	1700	1600
Tool Steel	770	2030	1800	1750	1700	1580
Chrome Manganese Steel	770	2300	2000	1880	1750	1660
Chrome Manganese Steel	630	2750	2300	2060	1800	1780
Chrome Molybdenum Steel	730	2540	2250	2140	2000	1800
Chrome Molybdenum Steel	600	2180	2000	1860	1800	1670
Nickel Chrome Molybdenum Steel	940	2000	1800	1680	1600	1500
Nickel Chrome Molybdenum Steel	352HB	2100	1900	1760	1700	1530
Austenitic Stainless Steel	155HB	2030	1970	1900	1770	1710
Cast Iron	520	2800	2500	2320	2200	2040
Hard Cast Iron	46HRC	3000	2700	2500	2400	2200
Meehanite Cast Iron	360	2180	2000	1750	1600	1470
Grey Cast Iron	200HB	1750	1400	1240	1050	970
Brass	500	1150	950	800	700	630
Light Alloy (Al-Mg)	160	580	480	400	350	320
Light Alloy (Al-Si)	200	700	600	490	450	390
Light Alloy (Al-Zn-Mg-Cu)	570	880	840	840	810	720

TROUBLE SHOOTING FOR END MILLING


Solution		Insert Grade Selection	Cutting Conditions										Style and Design of the Tool				Machine, Installation of Tool									
			Coated tool	Cutting speed		Feed	Depth of cut	Pick feed	Down cut	Use air blow	Coolant			Helix angle	Insert number	Concavity angle of end cutting edge	Tool diameter	Cutter rigidity	Wider chip pocket	Shorten tool overhang	Increase tool installation accuracy	Increase spindle collet run-out accuracy	Collet inspection and exchange	Increase chuck clamping power	Increase work clamping rigidity	
Up ↗	Down ↘	Increase coolant quantity		Do not use water-soluble cutting fluid	Determine dry or wet cutting						Up ↗	Larger	Down ↘													Smaller
Trouble	Factors																									
		Deterioration of Tool Life	Large peripheral cutting edge wear	Non-coated end mill is used	●																					
A small number of cutting edges																										
Improper cutting conditions																										
Severe chipping	Up cut milling is used																									
	Improper cutting conditions																									
	Fragile cutting edge																									
Breakage during cutting	Insufficient clamping force																									
	Low clamping rigidity																									
	Improper cutting conditions																									
Deterioration of Surface Finish	Vibration during cutting		Low end mill rigidity																							
			Low clamping rigidity																							
			Improper cutting conditions																							
	Poor surface finish on walls	Large cutting edge wear	●																							
		Improper cutting conditions																								
		Chip packing.																								
	Poor surface finish on faces	The end cutting edge does not have a concave angle																								
		Large pick feed																								
		Improper cutting conditions																								
	Out of vertical	Large cutting edge wear	●																							
		Improper cutting conditions																								
		Lack of end mill rigidity																								
Poor dimensional accuracy	Improper cutting conditions																									
	Low clamping rigidity																									
Burr, Chipping, etc.	Burr or chipping occurs																									
	Large helix angle																									
Burr formation	Notch wear	●																								
	Improper cutting conditions																									
Poor Chip Dispersal	Metal removal too large																									
	Lack of chip pocket																									

END MILL TERMINOLOGY

END MILL TERMINOLOGY

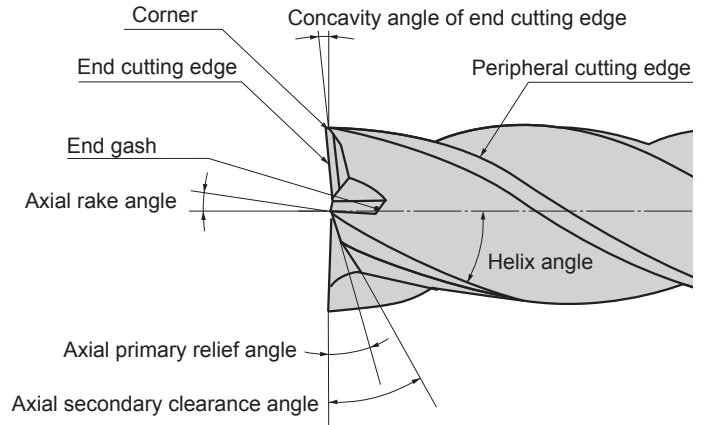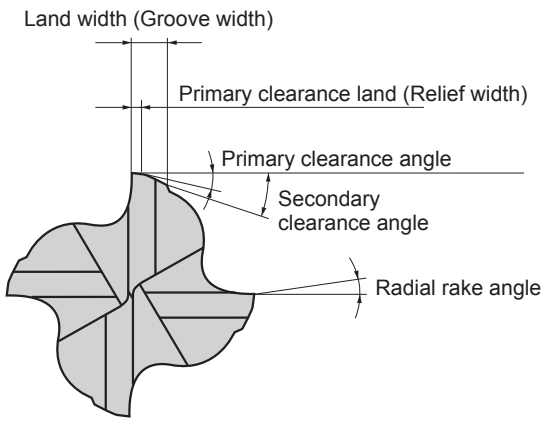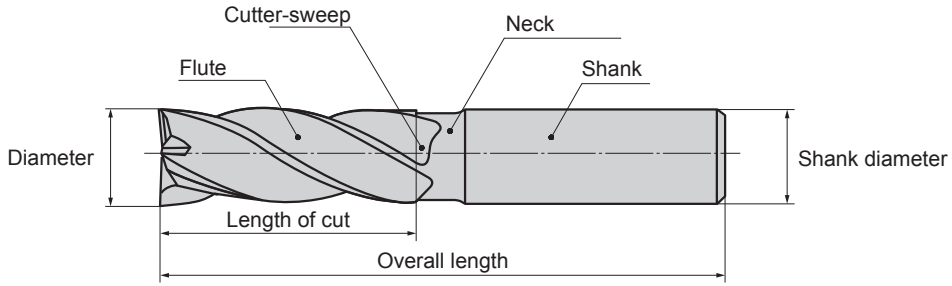

COMPARISON OF SECTIONAL SHAPE AREA OF CHIP POCKET




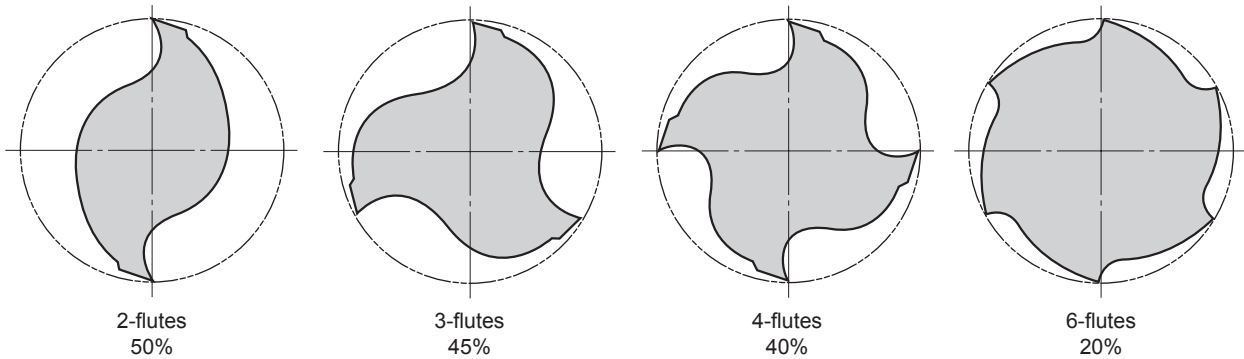


CHARACTERISTICS AND APPLICATIONS OF DIFFERENT-NUMBER-OF-FLUTE END MILLS





	2-flutes	3-flutes	4-flutes	6-flutes
Feature	Advantage	Chip disposability is excellent. Suitable for sinking.	High rigidity	High rigidity. Superior cutting edge durability.
	Fault	Low rigidity	Diameter is not easily measured.	Chip disposability is poor.
Usage	Slotting, side milling, sinking etc. Wide range of use.	Slotting, side milling Heavy cutting, finishing	Shallow slotting, side milling Finishing	High Hardness Material Shallow slotting, side milling

TYPES AND SHAPES OF END MILL





Peripheral Cutting Edge

Kind	Shape	Feature
Ordinary Flute		Ordinary flute type is most generally used for the slotting, side milling, and the shoulder milling, etc. Can be used for roughing, semi-finishing, and the finishing.
Tapered Flute		A tapered flute is used for milling mould drafts and angled faces.
Roughing Flute		Because a roughing tooth has a wave-like form and produces small chips. Cutting resistance is low, and is suitable for roughing. Not suitable for finishing. The tooth face is re-grindable.
Formed Flute		A corner radius cutter is shown. An infinite range of form cutters can be produced.

End Cutting Edge


Kind	Shape	Feature
Square End (Centre With Hole)		This is generally used for slotting, side milling, and shoulder milling. Sinking is not possible. Grinding is center supported, making re-grinding accurate.
Square End (Centre Cut)		It is generally used for slotting, side milling, and shoulder milling. Vertical cutting can be performed. Re-grinding is possible.
Ball End		Suitable for profile machining and pick feed milling.
End Radius		For corner radius milling and contouring. Efficient small corner radius milling due to large diameter and small corner radius.

Shank And Neck Parts

Kind	Shape	Feature
Standard (Straight Shank)		For general use.
Long Shank		For deep slotting and has a long shank, so that adjustment of the overhang is possible.
Long Neck		For deep slotting and small diameter end mills, also suitable for boring.
Taper Neck		For best performance in deep slotting and on mould drafts.

PITCH SELECTION OF PICK FEED

PICK FEED MILLING (CONTOURING) WITH BALL NOSE END MILLS AND END MILLS WITH CORNER RADIUS

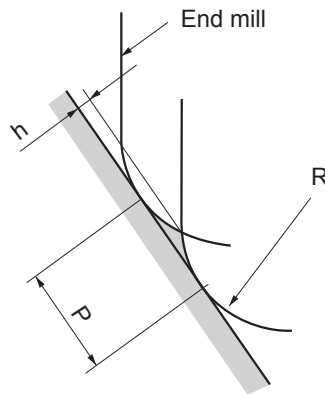

$$h = R \cdot \left[1 - \cos \left\{ \sin^{-1} \left(\frac{P}{2R} \right) \right\} \right]$$

R : Radius of Ball Nose(PRFRAD), Corner Radius(RE)

P : Pick Feed

h : Cusp Height

CORNER R OF END MILLS AND CUSP HEIGHT BY PICK FEED

Unit : mm

R \ P	Pitch of Pick Feed (P)									
	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
0.5	0.003	0.010	0.023	0.042	0.067	0.100	—	—	—	—
1	0.001	0.005	0.011	0.020	0.032	0.046	0.063	0.083	0.107	—
1.5	0.001	0.003	0.008	0.013	0.021	0.030	0.041	0.054	0.069	0.086
2	0.001	0.003	0.006	0.010	0.016	0.023	0.031	0.040	0.051	0.064
2.5	0.001	0.002	0.005	0.008	0.013	0.018	0.025	0.032	0.041	0.051
3		0.002	0.004	0.007	0.010	0.015	0.020	0.027	0.034	0.042
4		0.001	0.003	0.005	0.008	0.011	0.015	0.020	0.025	0.031
5		0.001	0.002	0.004	0.006	0.009	0.012	0.016	0.020	0.025
6		0.001	0.002	0.003	0.005	0.008	0.010	0.013	0.017	0.021
8			0.001	0.003	0.004	0.006	0.008	0.010	0.013	0.016
10			0.001	0.002	0.003	0.005	0.006	0.008	0.010	0.013
12.5			0.001	0.002	0.003	0.004	0.005	0.006	0.008	0.010

R \ P	Pitch of Pick Feed (P)									
	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
0.5	—	—	—	—	—	—	—	—	—	—
1	—	—	—	—	—	—	—	—	—	—
1.5	0.104	—	—	—	—	—	—	—	—	—
2	0.077	0.092	0.109	—	—	—	—	—	—	—
2.5	0.061	0.073	0.086	0.100	—	—	—	—	—	—
3	0.051	0.061	0.071	0.083	0.095	0.109	—	—	—	—
4	0.038	0.045	0.053	0.062	0.071	0.081	0.091	0.103	—	—
5	0.030	0.036	0.042	0.049	0.057	0.064	0.073	0.082	0.091	0.101
6	0.025	0.030	0.035	0.041	0.047	0.054	0.061	0.068	0.076	0.084
8	0.019	0.023	0.026	0.031	0.035	0.040	0.045	0.051	0.057	0.063
10	0.015	0.018	0.021	0.025	0.028	0.032	0.036	0.041	0.045	0.050
12.5	0.012	0.014	0.017	0.020	0.023	0.026	0.029	0.032	0.036	0.040

TROUBLE SHOOTING FOR DRILLING


Solution		Cutting Conditions							Style and Design of the Tool					Machine, Installation of Tool									
		Cutting speed	Feed	Lower feed at initial cutting	Lower feed when breaking through	Step feed	Increase accuracy of prep-hole and depth	Coolant			Chisel width	Honing width	Core thickness	Shorten flute length	Decrease lip height	Use internal coolant type drill	Change to a drill with X type thinning	Increase tool installation accuracy	Shorten tool overhang	Flat workpiece face	Increase work clamping rigidity	Reduce machine backlash and increase rigidity	
								Increase oil ratio	Increase volume	Increase coolant pressure													Up ↗
Trouble	Factors	Up ↗	Down ↘																				
		Deterioration of Tool Life	Drill breakage	Lack of drill rigidity																			
Improper cutting conditions				●																			
Large deflection of the tool holder																		●					●
Workpiece face is inclined																					●		
Large wear at the peripheral cutting edge and along the land	Improper cutting conditions		●																				
	An increase in temperature at the cutting point								●	●						●							
Poor run-out accuracy	Improper cutting conditions																						
	Poor entry																						
Chipping of the peripheral cutting edge	Improper cutting conditions			●			●																
	Large deflection of the tool holder																						
Chisel edge chipping	chattering, vibration																						
	The chisel edge width is too wide																						
	Poor entry																						
Deterioration of Hole Accuracy	Hole diameter increases	Lack of drill rigidity																					
		Improper drill geometry																					
	Hole diameter becomes smaller	An increase in temperature at the cutting point																					
		Improper cutting conditions	●																				
Poor straightness	Improper drill geometry																						
	Lack of drill rigidity																						
	Large deflection of the tool holder																						
Poor hole positioning accuracy, roundness and surface finish	Poor guiding properties																						
	Lack of drill rigidity																						
	Poor entry																						
Burrs	Burrs at the hole exit	Improper cutting conditions																					
		Improper drill geometry																					
	Improper cutting conditions																						
Poor Chip Dispersal	Long chips	Improper cutting conditions																					
		Poor chip disposal																					
Chip jamming	Chip jamming	Improper cutting conditions	●	●																			
		Poor chip disposal																					

TECHNICAL DATA

DRILL WEAR AND CUTTING EDGE DAMAGE


DRILL WEAR CONDITION

The table below shows a simple drawing depicting the wear of a drill's cutting edge. The generation and the amount of wear differ according to the workpiece materials and cutting conditions used. But generally, the peripheral wear is largest and determines a drill tool life. When regrinding, the flank wear at the point needs to be ground away completely. Therefore, if there is large wear more material needs to be ground away to renew the cutting edge.

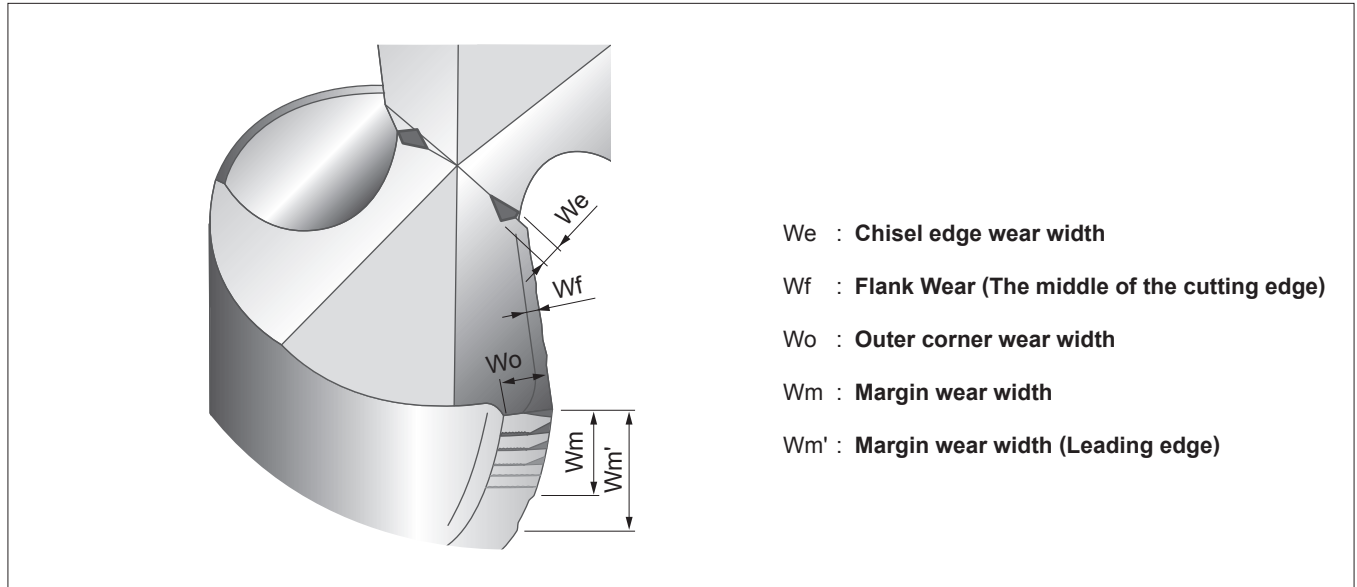


CUTTING EDGE DAMAGE

When drilling, the cutting edge of the drill can suffer from chipping, fracture and abnormal damage. In such cases, it is important to take a closer look at the damage, investigate the cause and take countermeasures.

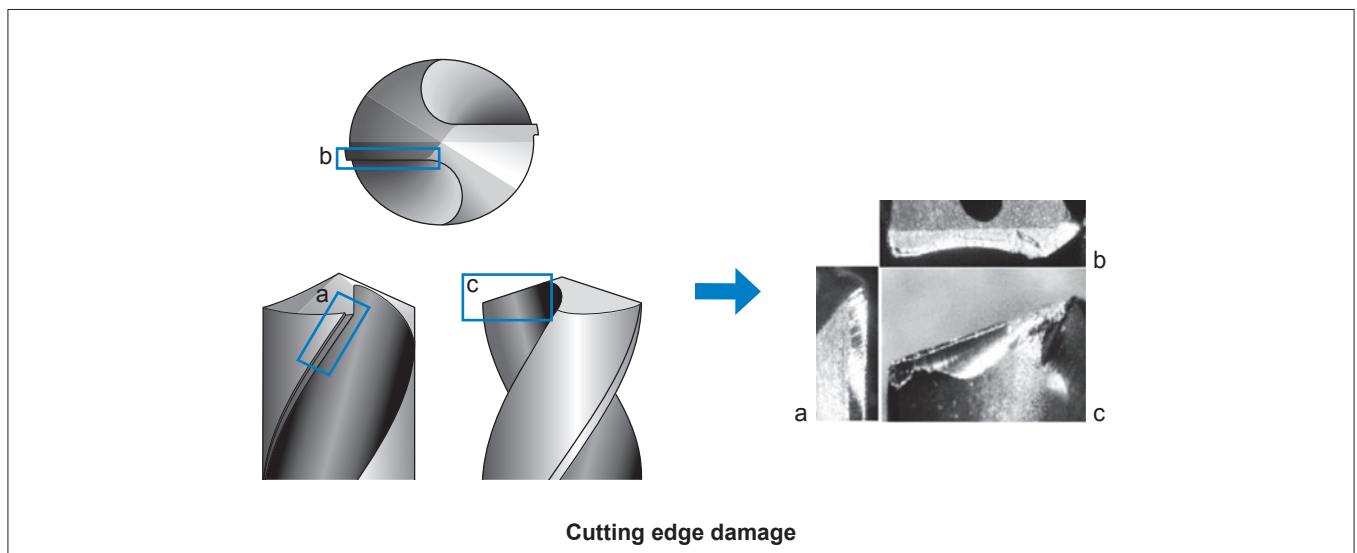

DRILL TERMINOLOGY AND CUTTING CHARACTERISTICS

■ NAMES OF EACH PART OF A DRILL

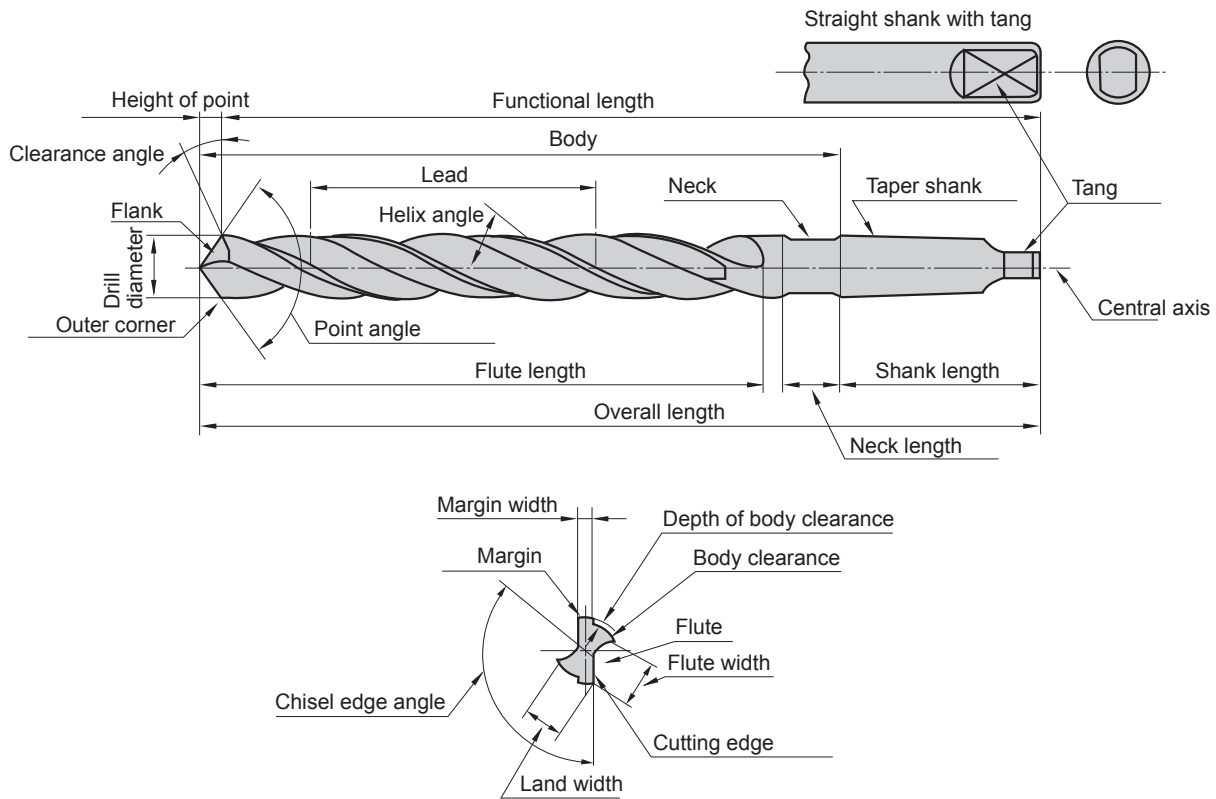







■ SHAPE SPECIFICATION AND CUTTING CHARACTERISTICS

Helix Angle	<p>Is the inclination of the flute with respect to the axial direction of a drill, which corresponds to the rake angle of a bit. The rake angle of a drill differs according to the position of the cutting edge, and it decreases greatly as the circumference approaches the centre. The chisel edge has a negative rake angle, crushing the work.</p> <p>High-hardness material Small ◀•• Rake angle ••▶ Large Soft material (Aluminium, etc.)</p>				
Flute Length	<p>It is determined by depth of hole, bush length, and regrinding allowance. Since the influence on the tool life is great, it is necessary to minimize it as much as possible.</p>				
Point Angle	<p>In general, the angle is 118° which is set differently to various applications.</p> <p>Soft material with good machinability Small ◀•• Point angle ••▶ Large For hard material and high-efficiency machining</p>				
Web Thickness	<p>It is an important element that determines the rigidity and chip raking performance of a drill. The web thickness is set according to applications.</p> <p> <table style="display: inline-table; border: none; vertical-align: middle;"> <tr> <td style="padding-right: 10px;"> Small cutting resistance Low rigidity Good chip raking performance Machinable material </td> <td style="font-size: 2em; vertical-align: middle;">}</td> <td style="text-align: center; vertical-align: middle;"> Thin ◀•• Web thickness ••▶ Thick </td> <td style="padding-left: 10px; vertical-align: middle;"> { Large cutting resistance High rigidity Poor chip raking performance High-hardness material, cross hole drilling, etc. </td> </tr> </table> </p>	Small cutting resistance Low rigidity Good chip raking performance Machinable material	}	Thin ◀•• Web thickness ••▶ Thick	{ Large cutting resistance High rigidity Poor chip raking performance High-hardness material, cross hole drilling, etc.
Small cutting resistance Low rigidity Good chip raking performance Machinable material	}	Thin ◀•• Web thickness ••▶ Thick	{ Large cutting resistance High rigidity Poor chip raking performance High-hardness material, cross hole drilling, etc.		
Margin	<p>The tip determines the drill diameter and functions as a drill guide during drilling. The margin width is determined in consideration of friction during hole drilled.</p> <p>Poor guiding performance Small ◀•• Margin width ••▶ Large Good guiding performance</p>				
Diameter Back Taper	<p>To reduce friction with the inside of the drilled hole, the portion from the tip to the shank is tapered slightly. The degree is usually represented by the quantity of reduction in the diameter with respect to the flute length, which is approx. 0.04—0.1mm. It is set at a larger value for high-efficiency drills and the work material that allows drilled holes.</p>				

CUTTING EDGE GEOMETRY AND ITS INFLUENCE





As shown in the table below, it is possible to select the most suitable cutting edge geometry for different applications. If the most suitable cutting edge geometry is selected then higher machining efficiency and higher hole accuracy can be obtained.

Cutting Edge Shapes

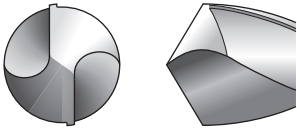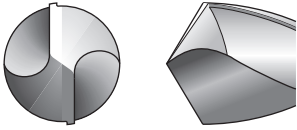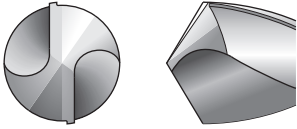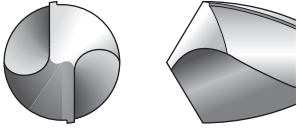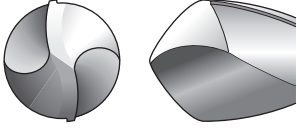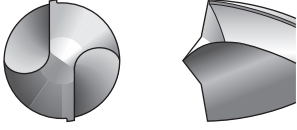Grinding name	Shape	Features and effect	Application
Conical		<ul style="list-style-type: none"> The flank is conical and the clearance angle increases toward the centre of the drill. 	<ul style="list-style-type: none"> General Use
Flat		<ul style="list-style-type: none"> The flank is flat. Easy grinding. 	<ul style="list-style-type: none"> Mainly for small diameter drills.
Three flank angles		<ul style="list-style-type: none"> As there is no chisel edge, the results are high centripetal force and small hole oversize. Requires a special grinding machine. Surface grinding of three sides. 	<ul style="list-style-type: none"> For drilling operations that require high hole accuracy and positioning accuracy.
Spiral point		<ul style="list-style-type: none"> To increase the clearance angle near the centre of the drill, conical grinding combined with irregular helix. S type chisel edge with high centripetal force and machining accuracy. 	<ul style="list-style-type: none"> For drilling that requires high accuracy.
Radial lip		<ul style="list-style-type: none"> The cutting edge is ground radial with the aim of dispersing load. High machining accuracy and finished surface roughness. For through holes, small burrs on the base. Requires a special grinding machine. 	<ul style="list-style-type: none"> Cast Iron, Aluminium Alloy For cast iron plates. Steel
Centre Point drill		<ul style="list-style-type: none"> This geometry has two-stage point angle for better concentricity and a reduction in shock when exiting the workpiece. 	<ul style="list-style-type: none"> For thin sheet drilling.







WEB THINNING

The rake angle of the cutting edge of a drill reduces toward the centre, and it changes into a negative angle at the chisel edge. During drilling, the centre of a drill crushes the work, generating 50–70% of the cutting resistance. Web thinning is very effective for reduction in the cutting resistance of a drill, early removal of cut chips at the chisel edge, and better initial bite.

Shape				
	X type	XR type	S type	N type
Features	The thrust load substantially reduces, and the bite performance improves. This is effective when the web is thick.	The initial performance is slightly inferior to that of the X type, but the cutting edge is hard and the applicable range of work is wide.	Popular design, easy cutting type.	Effective when the web is comparatively thick.
Major Applications	General drilling and deep hole drilling.	Long life. General drilling and stainless steel drilling.	General drilling for steel, cast iron, and non-ferrous metal.	Deep hole drilling.

DRILL TERMINOLOGY AND CUTTING CHARACTERISTICS

DRILLING CHIPS

Types of Chips	Shape	Features and Ease of Raking
Conical Spiral		Fan-shaped chips cut by the cutting edge are curved by the flute. Chips of this type are produced when the feeding rate of ductile material is small. If the chip breaks after several turns, the chip raking performance is satisfactory.
Long Pitch		The generated chip comes out without coiling. It will easily coil around the drill.
Fan		This is a chip broken by the restraint caused by the drill flute and the wall of a drilled hole. It is generated when the feed rate is high.
Segment		A conical spiral chip that is broken before the chip grows into the long-pitch shape by the restraint caused by the wall of the drilled hole due to the insufficiency of ductility. Excellent chip disposal and chip discharge.
Zigzag		A chip that is buckled and folded because of the shape of flute and the characteristics of the material. It easily causes chip packing at the flute.
Needle		Chips broken by vibration or broken when brittle material is curled with a small radius. The raking performance is satisfactory, but these chips can pack closely creating.

FORMULAE FOR DRILLING


CUTTING SPEED (v_c)

$$v_c = \frac{\pi \cdot DC \cdot n}{1000} \text{ (m/min)}$$

v_c (m/min) : Cutting Speed
 π (3.14) : Pi

DC (mm) : Drill Diameter
 n (min^{-1}) : Main Axis Spindle Speed

*Divide by 1,000 to change to m from mm.



(Problem) What is the cutting speed when main axis spindle speed is 1350min^{-1} and drill diameter is 12mm ?

(Answer) Substitute $\pi=3.14$, $DC=12$, $n=1350$ into the formula


$$v_c = \frac{\pi \cdot DC \cdot n}{1000} = \frac{3.14 \times 12 \times 1350}{1000} = 50.9\text{m/min}$$

The cutting speed is 50.9m/min.

FEED OF THE MAIN SPINDLE (v_f)

$$v_f = f_r \cdot n \text{ (mm/min)}$$

v_f (mm/min) : Feed Speed of the Main Spindle (Z axis)
 f_r (mm/rev) : Feed per Revolution
 n (min^{-1}) : Main Axis Spindle Speed



(Problem) What is the spindle feed (v_f) when the feed per revolution is 0.2mm/rev and main axis spindle speed is 1350min^{-1} ?

(Answer) Substitute $f_r=0.2$, $n=1350$ into the formula

$$v_f = f_r \cdot n = 0.2 \times 1350 = 270\text{mm/min}$$

The spindle feed is 270mm/min.

DRILLING TIME (T_c)

$$T_c = \frac{ld \cdot i}{n \cdot f_r}$$


T_c (min) : Drilling Time
 n (min^{-1}) : Spindle Speed
 ld (mm) : Hole Depth
 f_r (mm/rev) : Feed per Revolution
 i : Number of Holes

(Problem) What is the drilling time required for drilling a 30mm length hole in alloy steel (JIS SCM440) at a cutting speed of 50m/min and a feed 0.15mm/rev ?

(Answer) Spindle Speed $n = \frac{50 \times 1000}{15 \times 3.14} = 1061.57\text{min}^{-1}$

$$T_c = \frac{30 \times 1}{1061.57 \times 0.15} = 0.188$$

$$= 0.188 \times 60 \approx 11.3 \text{ sec}$$



METALLIC MATERIALS CROSS REFERENCE LIST

CARBON STEEL

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
STKM 12A STKM 12C	1.0038	RSt.37-2	4360 40 C	–	E 24-2 Ne	–	–	1311	A570.36	15
–	1.0401	C15	080M15	–	CC12	C15, C16	F.111	1350	1015	15
–	1.0402	C22	050A20	2C	CC20	C20, C21	F.112	1450	1020	20
SUM22	1.0715	9SMn28	230M07	1A	S250	CF9SMn28	F.2111 11SMn28	1912	1213	Y15
SUM22L	1.0718	9SMnPb28	–	–	S250Pb	CF9SMnPb28	11SMnPb28	1914	12L13	–
–	1.0722	10SPb20	–	–	10PbF2	CF10Pb20	10SPb20	–	–	–
–	1.0736	9SMn36	240M07	1B	S300	CF9SMn36	12SMn35	–	1215	Y13
–	1.0737	9SMnPb36	–	–	S300Pb	CF9SMnPb36	12SMnP35	1926	12L14	–
S15C	1.1141	Ck15	080M15	32C	XC12	C16	C15K	1370	1015	15
S25C	1.1158	Ck25	–	–	–	–	–	–	1025	25
–	1.8900	StE380	4360 55 E	–	–	FeE390KG	–	2145	A572-60	–
–	1.0501	C35	060A35	–	CC35	C35	F.113	1550	1035	35
–	1.0503	C45	080M46	–	CC45	C45	F.114	1650	1045	45
–	1.0726	35S20	212M36	8M	35MF4	–	F210G	1957	1140	–
–	1.1157	40Mn4	150M36	15	35M5	–	–	–	1039	40Mn
SMn438(H)	1.1167	36Mn5	–	–	40M5	–	36Mn5	2120	1335	35Mn2
SCMn1	1.1170	28Mn6	150M28	14A	20M5	C28Mn	–	–	1330	30Mn
S35C	1.1183	Cf35	060A35	–	XC38TS	C36	–	1572	1035	35Mn
S45C	1.1191	Ck45	080M46	–	XC42	C45	C45K	1672	1045	Ck45
S50C	1.1213	Cf53	060A52	–	XC48TS	C53	–	1674	1050	50
–	1.0535	C55	070M55	9	–	C55	–	1655	1055	55
–	1.0601	C60	080A62	43D	CC55	C60	–	–	1060	60
S55C	1.1203	Ck55	070M55	–	XC55	C50	C55K	–	1055	55
S58C	1.1221	Ck60	080A62	43D	XC60	C60	–	1678	1060	60Mn
–	1.1274	Ck101	060A96	–	XC100	–	F.5117	1870	1095	–
SK3	1.1545	C105W1	BW1A	–	Y105	C36KU	F.5118	1880	W1	–
SUP4	1.1545	C105W1	BW2	–	Y120	C120KU	F.515	2900	W210	–

ALLOY STEEL

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SM400A, SM400B SM400C	1.0144	St.44.2	4360 43 C	–	E28-3	–	–	1412	A573-81	–
SM490A, SM490B SM490C	1.0570	St52-3	4360 50 B	–	E36-3	Fe52BFN Fe52CFN	–	2132	–	–
–	1.0841	St52-3	150M19	–	20MC5	Fe52	F.431	2172	5120	–
–	1.0904	55Si7	250A53	45	55S7	55Si8	56Si7	2085	9255	55Si2Mn
–	1.0961	60SiCr7	–	–	60SC7	60SiCr8	60SiCr8	–	9262	–
SUJ2	1.3505	100Cr6	534A99	31	100C6	100Cr6	F.131	2258	ASTM 52100	Gr15, 45G
–	1.5415	15Mo3	1501-240	–	15D3	16Mo3KW	16Mo3	2912	ASTM A204Gr.A	–
–	1.5423	16Mo5	1503-245-420	–	–	16Mo5	16Mo5	–	4520	–
–	1.5622	14Ni6	–	–	16N6	14Ni6	15Ni6	–	ASTM A350LF5	–
–	1.5662	X8Ni9	1501-509-510	–	–	X10Ni9	XBNI09	–	ASTM A353	–
SNC236	1.5710	36NiCr6	640A35	111A	35NC6	–	–	–	3135	–
SNC415(H)	1.5732	14NiCr10	–	–	14NC11	16NiCr11	15NiCr11	–	3415	–
SNC815(H)	1.5752	14NiCr14	655M13	36A	12NC15	–	–	–	3415, 3310	–
SNCM220(H)	1.6523	21NiCrMo2	805M20	362	20NCD2	20NiCrMo2	20NiCrMo2	2506	8620	–
SNCM240	1.6546	40NiCrMo22	311-Type 7	–	–	40NiCrMo2(KB)	40NiCrMo2	–	8740	–
–	1.6587	17CrNiMo6	820A16	–	18NCD6	–	14NiCrMo13	–	–	–
SCr415(H)	1.7015	15Cr3	523M15	–	12C3	–	–	–	5015	15Cr

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SCr440	1.7045	42Cr4	–	–	–	–	42Cr4	2245	5140	40Cr
SUP9(A)	1.7176	55Cr3	527A60	48	55C3	–	–	–	5155	20CrMn
SCM415(H)	1.7262	15CrMo5	–	–	12CD4	–	12CrMo4	2216	–	–
–	1.7335	13CrMo4 4	1501-620Gr27	–	15CD3.5 15CD4.5	14CrMo45	14CrMo45	–	ASTM A182 F11, F12	–
–	1.7380	10CrMo910	1501-622 Gr31, 45	–	12CD9 12CD10	12CrMo9 12CrMo10	TU.H	2218	ASTM A182 F.22	–
–	1.7715	14MoV63	1503-660-440	–	–	–	13MoCrV6	–	–	–
–	1.8523	39CrMoV13 9	897M39	40C	–	36CrMoV12	–	–	–	–
–	1.6511	36CrNiMo4	816M40	110	40NCD3	38NiCrMo4(KB)	35NiCrMo4	–	9840	–
–	1.6582	34CrNiMo6	817M40	24	35NCD6	35NiCrMo6(KB)	–	2541	4340	40CrNiMoA
SCr430(H)	1.7033	34Cr4	530A32	18B	32C4	34Cr4(KB)	35Cr4	–	5132	35Cr
SCr440(H)	1.7035	41Cr4	530M40	18	42C4	41Cr4	42Cr4	–	5140	40Cr
–	1.7131	16MnCr5	(527M20)	–	16MC5	16MnCr5	16MnCr5	2511	5115	18CrMn
SCM420 SCM430	1.7218	25CrMo4	1717CDS110 708M20	–	25CD4	25CrMo4(KB)	55Cr3	2225	4130	30CrMn
SCM432 SCCRM3	1.7220	34CrMo4	708A37	19B	35CD4	35CrMo4	34CrMo4	2234	4137 4135	35CrMo
SCM 440	1.7223	41CrMo4	708M40	19A	42CD4TS	41CrMo4	42CrMo4	2244	4140 4142	40CrMoA
SCM440(H)	1.7225	42CrMo4	708M40	19A	42CD4	42CrMo4	42CrMo4	2244	4140	42CrMo 42CrMnMo
–	1.7361	32CrMo12	722M24	40B	30CD12	32CrMo12	F.124.A	2240	–	–
SUP10	1.8159	50CrV4	735A50	47	50CV4	50CrV4	51CrV4	2230	6150	50CrVA
–	1.8509	41CrAlMo7	905M39	41B	40CAD6 40CAD2	41CrAlMo7	41CrAlMo7	2940	–	–
–	1.2067	100Cr6	BL3	–	Y100C6	–	100Cr6	–	L3	CrV, 9SiCr
SKS31 SKS2, SKS3	1.2419	105WCr6	–	–	105WC13	100WCr6 107WCr5KU	105WCr5	2140	–	CrWMo
SKT4	1.2713	55NiCrMoV6	BH224/5	–	55NCDV7	–	F.520.S	–	L6	5CrNiMo
–	1.5662	X8Ni9	1501-509	–	–	X10Ni9	XBNi09	–	ASTM A353	–
–	1.5680	12Ni19	–	–	Z18N5	–	–	–	2515	–
–	1.6657	14NiCrMo134	832M13	36C	–	15NiCrMo13	14NiCrMo131	–	–	–
SKD1	1.2080	X210Cr12	BD3	–	Z200C12	X210Cr13KU X250Cr12KU	X210Cr12	–	D3 ASTM D3	Cr12
SKD11	1.2601	X153CrMoV12	BD2	–	–	X160CrMoV12	–	–	D2	Cr12MoV
SKD12	1.2363	X100CrMoV5	BA2	–	Z100CDV5	X100CrMoV5	F.5227	2260	A2	Cr5Mo1V
SKD61	1.2344	X40CrMoV51 X40CrMoV51	BH13	–	Z40CDV5	X35CrMoV05KU X40CrMoV51KU	X40CrMoV5	2242	H13 ASTM H13	40CrMoV5
SKD2	1.2436	X210CrW12	–	–	–	X215CrW121KU	X210CrW12	2312	–	–
–	1.2542	45WCrV7	BS1	–	–	45WCrV8KU	45WCrSi8	2710	S1	–
SKD5	1.2581	X30WCrV93	BH21	–	Z30WCV9	X28W09KU	X30WCrV9	–	H21	30WCrV9
–	1.2601	X165CrMoV12	–	–	–	X165CrMoW12KU	X160CrMoV12	2310	–	–
SKS43	1.2833	100V1	BW2	–	Y1105V	–	–	–	W210	V
SKH3	1.3255	S 18-1-2-5	BT4	–	Z80WKCV	X78WCo1805KU	HS18-1-1-5	–	T4	W18Cr4VCo5
SKH2	1.3355	S 18-0-1	BT1	–	Z80WCV	X75W18KU	HS18-0-1	–	T1	–
SCMnH/1	1.3401	G-X120Mn12	Z120M12	–	Z120M12	XG120Mn12	X120MN12	–	–	–
SUH1	1.4718	X45CrSi93	401S45	52	Z45CS9	X45CrSi8	F.322	–	HW3	X45CrSi93
SUH3	1.3343	S6-5-2	4959BA2	–	Z40CSD10	15NiCrMo13	–	2715	D3	–
SKH9, SKH51	1.3343	S6/5/2	BM2	–	Z85WDCV	HS6-5-2-2	F.5603	2722	M2	–
–	1.3348	S 2-9-2	–	–	–	HS2-9-2	HS2-9-2	2782	M7	–
SKH55	1.3243	S6/5/2/5	BM35	–	6-5-2-5	HS6-5-2-5	F.5613	2723	M35	–

TECHNICAL DATA

METALLIC MATERIALS CROSS REFERENCE LIST

STAINLESS STEEL (FERRITIC, MARTENSITIC)

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SUS403	1.4000	X7Cr13	403S17	–	Z6C13	X6Cr13	F.3110	2301	403	0Cr13 1Cr12
–	1.4001	X7Cr14	–	–	–	–	F.8401	–	–	–
SUS416	1.4005	X12CrS13	416S21	–	Z11CF13	X12CrS13	F.3411	2380	416	–
SUS410	1.4006	X10Cr13	410S21	56A	Z10C14	X12Cr13	F.3401	2302	410	1Cr13
SUS430	1.4016	X8Cr17	430S15	60	Z8C17	X8Cr17	F.3113	2320	430	1Cr17
SCS2	1.4027	G-X20Cr14	420C29	56B	Z20C13M	–	–	–	–	–
SUS420J2	1.4034	X46Cr13	420S45	56D	Z40CM Z38C13M	X40Cr14	F.3405	2304	–	4Cr13
–	1.4003	–	405S17	–	Z8CA12	X6CrAl13	–	–	405	–
–	1.4021	–	420S37	–	Z8CA12	X20Cr13	–	2303	420	–
SUS431	1.4057	X22CrNi17	431S29	57	Z15CNi6.02	X16CrNi16	F.3427	2321	431	1Cr17Ni2
SUS430F	1.4104	X12CrMoS17	–	–	Z10CF17	X10CrS17	F.3117	2383	430F	Y1Cr17
SUS434	1.4113	X6CrMo17	434S17	–	Z8CD17.01	X8CrMo17	–	2325	434	1Cr17Mo
SCS5	1.4313	X5CrNi134	425C11	–	Z4CND13.4M	(G)X6CrNi304	–	2385	CA6-NM	–
SUS405	1.4724	X10CrA113	403S17	–	Z10C13	X10CrA112	F.311	–	405	0Cr13Al
SUS430	1.4742	X10CrA118	430S15	60	Z10CAS18	X8Cr17	F.3113	–	430	Cr17
SUH4	1.4747	X80CrNiSi20	443S65	59	Z80CSN20.02	X80CrSiNi20	F.320B	–	HNV6	–
SUH446	1.4762	X10CrA124	–	–	Z10CAS24	X16Cr26	–	2322	446	2Cr25N
SUH35	1.4871	X53CrMnNiN219	349S54	–	Z52CMN21.09	X53CrMnNiN219	–	–	EV8	5Cr2Mn9Ni4N
–	1.4521	X1CrMoTi182	–	–	–	–	–	2326	S44400	–
–	1.4922	X20CrMoV12-1	–	–	–	X20CrMoNi1201	–	2317	–	–
–	1.4542	–	–	–	Z7CNU17-04	–	–	–	630	–

STAINLESS STEEL (AUSTENITIC)

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SUS304L	1.4306	X2CrNi1911	304S11	–	Z2CN18.10	X2CrNi18.11	–	2352	304L	0Cr19Ni10
SUS304	1.4350	X5CrNi189	304S11	58E	Z6CN18.09	X5CrNi1810	F.3551 F.3541 F.3504	2332	304	0Cr18Ni9
SUS303	1.4305	X12CrNiS188	303S21	58M	Z10CNF18.09	X10CrNiS18.09	F.3508	2346	303	1Cr18Ni9MoZr
SUS304L	–	–	304C12	–	Z3CN19.10	–	–	2333	–	–
SCS19	1.4306	X2CrNi189	304S12	–	Z2CrNi1810	X2CrNi18.11	F.3503	2352	304L	–
SUS301	1.4310	X12CrNi177	–	–	Z12CN17.07	X12CrNi1707	F.3517	2331	301	Cr17Ni7
SUS304LN	1.4311	X2CrNiN1810	304S62	–	Z2CN18.10	–	–	2371	304LN	–
SUS316	1.4401	X5CrNiMo1810	316S16	58J	Z6CND17.11	X5CrNiMo1712	F.3543	2347	316	0Cr17Ni11Mo2
SCS13	1.4308	G-X6CrNi189	304C15	–	Z6CN18.10M	–	–	–	–	–
SCS14	1.4408	G-X6CrNiMo1810	316C16	–	–	–	F.8414	–	–	–
SCS22	1.4581	G-X5CrNiMoNb1810	318C17	–	Z4CNDNb1812M	X8CrNiMo1811	–	–	–	–
SUS316LN	1.4429	X2CrNiMoN1813	–	–	Z2CND17.13	–	–	2375	316LN	0Cr17Ni13Mo
–	1.4404	–	316S13	–	Z2CND17.12	X2CrNiMo1712	–	2348	316L	–
SCS16	1.4435	X2CrNiMo1812	316S13	–	Z2CND17.12	X2CrNiMo1712	–	2353	316L	0Cr27Ni12Mo3
SUS316L	–	–	316S13	–	–	–	–	–	–	–
–	1.4436	–	316S13	–	Z6CND18-12-03	X8CrNiMo1713	–	2343, 2347	316	–
SUS317L	1.4438	X2CrNiMo1816	317S12	–	Z2CND19.15	X2CrNiMo1816	–	2367	317L	00Cr19Ni13Mo
–	1.4539	X1NiCrMo	–	–	Z6CNT18.10	–	–	2562	UNS V 0890A	–
SUS321	1.4541	X10CrNiTi189	321S12	58B	Z6CNT18.10	X6CrNiTi1811	F.3553 F.3523	2337	321	1Cr18Ni9Ti
SUS347	1.4550	X10CrNiNb189	347S17	58F	Z6CNNb18.10	X6CrNiNb1811	F.3552 F.3524	2338	347	1Cr18Ni11Nb
–	1.4571	X10CrNiMoTi1810	320S17	58J	Z6CNDT17.12	X6CrNiMoTi1712	F.3535	2350	316Ti	Cr18Ni12Mo2T
–	1.4583	X10CrNiMoNb1812	–	–	Z6CNDNb1713B	X6CrNiMoNb1713	–	–	318	Cr17Ni12Mo3Mb

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SUH309	1.4828	X15CrNiSi2012	309S24	–	Z15CNS20.12	X6CrNi2520	–	–	309	1Cr23Ni13
SUH310	1.4845	X12CrNi2521	310S24	–	Z12CN2520	X6CrNi2520	F.331	2361	310S	OCr25Ni20
SCS17	1.4406	X10CrNi18.08	–	58C	Z1NCDU25.20	–	F.8414	2370	308	–
–	1.4418	X4CrNiMo165	–	–	Z6CND16-04-01	–	–	–	–	–
–	1.4568 1.4504	–	316S111	–	Z8CNA17-07	X2CrNiMo1712	–	–	17-7PH	–
–	1.4563	–	–	–	Z1NCDU31-27-03 Z1CNDU20-18-06AZ	–	–	2584 2378	NO8028 S31254	–
SUS321	1.4878	X12CrNiTi189	321S32	58B, 58C	Z6CNT18.12B	X6CrNiTi18 11	F.3523	–	321	1Cr18Ni9Ti

HEAT RESISTANT STEELS

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
SUH330	1.4864	X12NiCrSi3616	–	–	Z12NCS35.16	–	–	–	330	–
SCH15	1.4865	G-X40NiCrSi3818	330C11	–	–	XG50NiCr3919	–	–	HT, HT 50	–

GRAY CAST IRON

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
–	–	–	–	–	–	–	–	0100	–	–
FC100	–	GG 10	–	–	Ft 10 D	–	–	0110	No 20 B	–
FC150	0.6015	GG 15	Grade 150	–	Ft 15 D	G15	FG15	0115	No 25 B	HT150
FC200	0.6020	GG 20	Grade 220	–	Ft 20 D	G20	–	0120	No 30 B	HT200
FC250	0.6025	GG 25	Grade 260	–	Ft 25 D	G25	FG25	0125	No 35 B	HT250
–	–	–	–	–	–	–	–	–	No 40 B	–
FC300	0.6030	GG 30	Grade 300	–	Ft 30 D	G30	FG30	0130	No 45 B	HT300
FC350	0.6035	GG 35	Grade 350	–	Ft 35 D	G35	FG35	0135	No 50 B	HT350
–	0.6040	GG 40	Grade 400	–	Ft 40 D	–	–	0140	No 55 B	HT400
–	0.6660	GGL NiCr202	L-NiCuCr202	–	L-NC 202	–	–	0523	A436 Type 2	–

DUCTILE CAST IRON

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
FCD400	0.7040	GGG 40	SNG 420/12	–	FCS 400-12	GS 370-17	FGE 38-17	07 17-02	60-40-18	QT400-18
–	–	GGG 40.3	SNG 370/17	–	FGS 370-17	–	–	07 17-12	–	–
–	0.7033	GGG 35.3	–	–	–	–	–	07 17-15	–	–
FCD500	0.7050	GGG 50	SNG 500/7	–	FGS 500-7	GS 500	FGE 50-7	07 27-02	80-55-06	QT500-7
–	0.7660	GGG NiCr202	Grade S6	–	S-NC202	–	–	07 76	A43D2	–
–	–	GGG NiMn137	L-NiMn 137	–	L-MN 137	–	–	07 72	–	–
FCD600	–	GGG 60	SNG 600/3	–	FGS 600-3	–	–	07 32-03	–	QT600-3
FCD700	0.7070	GGG 70	SNG 700/2	–	FGS 700-2	GS 700-2	FGS 70-2	07 37-01	100-70-03	QT700-18

MALLEABLE CAST IRON

Japan	Germany		U.K.		France	Italy	Spain	Sweden	USA	China
JIS	W-nr.	DIN	BS	EN	AFNOR	UNI	UNE	SS	AISI/SAE	GB
FCMB310	–	–	8 290/6	–	MN 32-8	–	–	08 14	–	–
FCMW330	–	GTS-35	B 340/12	–	MN 35-10	–	–	08 15	32510	–
FCMW370	0.8145	GTS-45	P 440/7	–	Mn 450	GMN45	–	08 52	40010	–
FCMP490	0.8155	GTS-55	P 510/4	–	MP 50-5	GMN55	–	08 54	50005	–
FCMP540	–	GTS-65	P 570/3	–	MP 60-3	–	–	08 58	70003	–
FCMP590	0.8165	GTS-65-02	P 570/3	–	Mn 650-3	GMN 65	–	08 56	A220-70003	–
FCMP690	–	GTS-70-02	P 690/2	–	Mn 700-2	GMN 70	–	08 62	A220-80002	–

DIE STEELS

Classification	JIS (Others)	Aichi Steel Works	Uddeholm	Kobe Steel, Ltd.	Sumitomo Metal Industries, Ltd.	Daido Steel Co., Ltd.	Nippon Koshuha	Hitachi Metals, Ltd.	Mitsubishi Steel Manufacturing Co., Ltd.
Carbon Steel for Machine Structure	S50C	AUK1		KTSM2A	SD10	PDS1	KPM1		MT50C
	I			KTSM21	SD17	PXZ			
	S55C			KTSM22	SD21				
Alloy Steel for Machine Structure	SCM440	AUK11		KTSM3A	SD61	PDS3			
	I SCM445		HOLDAX	KTSM31					
Carbon Tool Steel	SK3	SK3				YK3	K3	YC3	
Alloy Tool Steel (For Cold Working)	SKS3	SKS3				GOA	KS3	SGT	
	SKS31					GO31	K31		
	SKS93	SK301				YK30	K3M	YCS3	
	SKD1						KD1	CRD	
	SKD11	SKD11		KAD181		DC11	KD11	SLD	
	SKD11	AUD11				DC3	KD11V	SLD2	
	SKD11						KDQ		
	SKD12		RIGOR			DC12	KD12	SCD	
		SX4							
		SX44						FH5	
		SX105V							
		TCD							
						DC53	KD21	SLD8	
						PD613			
						GO4		ACD37	
						GO5		HMD5	
					GO40F		HPM2T		
							YSM		
							HPM31		
							HMD1		
							KDM5		
							KD11S		
								HMD5	
								ACD6	
								ACD8	
								ACD9	
Alloy Tool Steel (For Cold Working and Others)	(P20)		IMPAX	KTSM3M		PX5	KPM30	HPM2	MT24M
	(P20)							HPM7	
	(P21)			KTSM40EF KTSM40E		NAK55 NAK80 GLD2	KAP KAP2	HPM1 HPM50 CENA1	
Alloy Tool Steel (For Hot Working)	SKD4					DH4	KD4	YDC	
	SKD5					DH5	KD5	HDC	
	SKD6					DH6	KD6		
	SKD61	SKD61	Over M Suprem			DHA1	KDA	DAC	
	SKD61						MFA		
	SKD62	SKD62				DH62	KDB	DBC	
	SKT4					GFA	KTV	DM	
	SKD7					DH72	KDH1	YEM	
	(H10)					DH73			
	SKD8					DH41	KDF	MDC	
				QRO80M					
									YHD40
						DH71			
						DH42			
						DH21			
							KDW KDHM AE31		
									YEM4
									YHD50
SKT4	SKT4A							YHD26	
6F4	MPH								
SKT4									
						DH31	KDA1 KDA5	DAC3 DAC10	
								DAC40	
						GF78		DAC45	
						DH76		DAC55	
							TD3 KDas	FDAC	
						DH2F		YHD3	
								MDC-K	
								YEM-K	

Classification	JIS (Others)	Aichi Steel Works	Uddeholm	Kobe Steel, Ltd.	Sumitomo Metal Industries, Ltd.	Daido Steel Co., Ltd.	Nippon Koshuha	Hitachi Metals, Ltd.	Mitsubishi Steel Manufacturing Co., Ltd.
High-speed Tool Steel	SKH51					MH51	H51	YXM1	
	SKH55					MH55	HM35	YXM4	
	SKH57					MH57	MV10	XVC5	
						MH8	NK4	YXM60	
						MH24			
						MH7V1			
						MH64			
						VH54	HV2	XVC11	
							HM3	YXM7	
						MH85	KDMV	YXR3	
						MH88	HM9TL	YXR4	
							YXR7		
							YXR35		
Powder High-speed Tool Steel			ASP23	KHA32		DEX20		HAP10	
			ASP30	KHA30		DEX40		HAP40	
				KHA3VN		DEX60		HAP50	
				KHA30N		DEX70		HAP63	
				KHA33N		DEX80		HAP72	
				KHA50					
				KHA77					
			ASP60	KHA60					
Stainless Steel	SUS403					GLD1			
	SUS420		STAVAX			S-STAR	KSP1	HPM38	
	SUS440C		ELMAX (Powder)	KAS440 (Powder)		SUS440C	KSP3		
	SUS420							SUS420	
	SUS630					NAK101	U630	PSL	
	(414)								
Maraging Steel						MAS1C	KMS18-20	YAG	DMG300
Heat Resistant Alloy								HRNC	
Forged Tool								ICD1	
								ICD5	

SURFACE ROUGHNESS

SURFACE ROUGHNESS

(From JIS B 0601-1994)

Type	Code	Determination	Determination Example (Figure)
Arithmetical Mean Roughness	Ra	<p>Ra means the value obtained by the following formula and expressed in micrometer (μm) when sampling only the reference length from the roughness curve in the direction of the mean line, taking X-axis in the direction of mean line and Y-axis in the direction of longitudinal magnification of this sampled part and the roughness curve is expressed by $y=f(x)$:</p> $Ra = \frac{1}{\ell} \int_0^{\ell} f(x) dx$	
Maximum Height	Rz	<p>Rz shall be that only when the reference length is sampled from the roughness curve in the direction of the mean line, the distance between the top profile peak line and the bottom profile valley line on this sampled portion is measured in the longitudinal magnification direction of roughness curve and the obtained value is expressed in micrometer (μm).</p> <p>(Note) When finding Rz, a portion without an exceptionally high peak or low valley, which may be regarded as a flaw, is selected as the sampling length.</p> $Rz = R_p + R_v$	
Ten-Point Mean Roughness	RzJIS	<p>RzJIS shall be that only when the reference length is sampled from the roughness curve in the direction of its mean line, the sum of the average value of absolute values of the heights of five highest profile peaks (Yp) and the depths of five deepest profile valleys (Yv) measured in the vertical magnification direction from the mean line of this sampled portion and this sum is expressed in micrometer (μm).</p> $Rz_{JIS} = \frac{(Y_{p1} + Y_{p2} + Y_{p3} + Y_{p4} + Y_{p5}) + (Y_{v1} + Y_{v2} + Y_{v3} + Y_{v4} + Y_{v5})}{5}$	<p>$Y_{p1}, Y_{p2}, Y_{p3}, Y_{p4}, Y_{p5}$: altitudes of the five highest profile peaks of the sampled portion corresponding to the reference length l.</p> <p>$Y_{v1}, Y_{v2}, Y_{v3}, Y_{v4}, Y_{v5}$: altitudes of the five deepest profile valleys of the sampled portion corresponding to the reference length l.</p>

RELATIONSHIP BETWEEN ARITHMETICAL MEAN (Ra) AND CONVENTIONAL DESIGNATION (REFERENCE DATA)

Arithmetical Mean Roughness Ra		Max. Height Rz	Ten-Point Mean Roughness RzJIS	Sampling Length for Rz • RzJIS l (mm)	Conventional Finish Mark
Standard Series	Cutoff Value λ_c (mm)	Standard Series			
0.012 a	0.08	0.05s	0.05z	0.08	
0.025 a		0.1 s	0.1 z		
0.05 a	0.25	0.2 s	0.2 z	0.25	▽▽▽▽
0.1 a		0.4 s	0.4 z		
0.2 a		0.8 s	0.8 z		
0.4 a	0.8	1.6 s	1.6 z	0.8	▽▽▽
0.8 a		3.2 s	3.2 z		
1.6 a		6.3 s	6.3 z		
3.2 a		12.5 s	12.5 z		
6.3 a	2.5	25 s	25 z	2.5	▽▽
12.5 a		50 s	50 z		
25 a	8	100 s	100 z	8	▽
50 a		200 s	200 z		
100 a		400 s	400 z		
	—			—	—

*The correlation among the three is shown for convenience and is not exact.

*Ra: The evaluation length of Rz and RzJIS is the cutoff value and sampling length multiplied by 5, respectively.

HARDNESS COMPARISON TABLE

HARDNESS CONVERSION NUMBERS OF STEEL

Brinell Hardness (HB) 10mm Ball, Load: 3,000 kgf		Vickers Hardness	Rockwell Hardness				Shore Hardness	Tensile Strength (Approx.) Mpa	Brinell Hardness (HB) 10mm Ball, Load: 3,000 kgf		Vickers Hardness	Rockwell Hardness				Shore Hardness	Tensile Strength (Approx.) Mpa
Standard Ball	Tungsten Carbide Ball		A Scale, Load:60kgf, Diamond Point	B Scale, Load:100kgf, 1/16" Ball	C Scale, Load:150kgf, Diamond Point	D Scale, Load:100kgf, Diamond Point			Standard Ball	Tungsten Carbide Ball		A Scale, Load:60kgf, Diamond Point	B Scale, Load:100kgf, 1/16" Ball	C Scale, Load:150kgf, Diamond Point	D Scale, Load:100kgf, Diamond Point		
—	—	940	85.6	—	68.0	76.9	97	—	429	429	455	73.4	—	45.7	59.7	61	1510
—	—	920	85.3	—	67.5	76.5	96	—	415	415	440	72.8	—	44.5	58.8	59	1460
—	—	900	85.0	—	67.0	76.1	95	—	401	401	425	72.0	—	43.1	57.8	58	1390
—	(767)	880	84.7	—	66.4	75.7	93	—	388	388	410	71.4	—	41.8	56.8	56	1330
—	(757)	860	84.4	—	65.9	75.3	92	—	375	375	396	70.6	—	40.4	55.7	54	1270
—	(745)	840	84.1	—	65.3	74.8	91	—	363	363	383	70.0	—	39.1	54.6	52	1220
—	(733)	820	83.8	—	64.7	74.3	90	—	352	352	372	69.3	(110.0)	37.9	53.8	51	1180
—	(722)	800	83.4	—	64.0	73.8	88	—	341	341	360	68.7	(109.0)	36.6	52.8	50	1130
—	(712)	—	—	—	—	—	—	—	331	331	350	68.1	(108.5)	35.5	51.9	48	1095
—	(710)	780	83.0	—	63.3	73.3	87	—	321	321	339	67.5	(108.0)	34.3	51.0	47	1060
—	(698)	760	82.6	—	62.5	72.6	86	—	—	—	—	—	—	—	—	—	—
—	(684)	740	82.2	—	61.8	72.1	—	—	311	311	328	66.9	(107.5)	33.1	50.0	46	1025
—	(682)	737	82.2	—	61.7	72.0	84	—	302	302	319	66.3	(107.0)	32.1	49.3	45	1005
—	(670)	720	81.8	—	61.0	71.5	83	—	293	293	309	65.7	(106.0)	30.9	48.3	43	970
—	(656)	700	81.3	—	60.1	70.8	—	—	285	285	301	65.3	(105.5)	29.9	47.6	—	950
—	(653)	697	81.2	—	60.0	70.7	81	—	277	277	292	64.6	(104.5)	28.8	46.7	41	925
—	(647)	690	81.1	—	59.7	70.5	—	—	269	269	284	64.1	(104.0)	27.6	45.9	40	895
—	(638)	680	80.8	—	59.2	70.1	80	—	262	262	276	63.6	(103.0)	26.6	45.0	39	875
—	630	670	80.6	—	58.8	69.8	—	—	255	255	269	63.0	(102.0)	25.4	44.2	38	850
—	627	667	80.5	—	58.7	69.7	79	—	248	248	261	62.5	(101.0)	24.2	43.2	37	825
—	—	677	80.7	—	59.1	70.0	—	—	241	241	253	61.8	100	22.8	42.0	36	800
—	601	640	79.8	—	57.3	68.7	77	—	235	235	247	61.4	99.0	21.7	41.4	35	785
—	—	640	79.8	—	57.3	68.7	—	—	229	229	241	60.8	98.2	20.5	40.5	34	765
—	578	615	79.1	—	56.0	67.7	75	—	223	223	234	—	97.3	(18.8)	—	—	—
—	—	607	78.8	—	55.6	67.4	—	—	217	217	228	—	96.4	(17.5)	—	33	725
—	555	591	78.4	—	54.7	66.7	73	2055	212	212	222	—	95.5	(16.0)	—	—	705
—	—	607	78.8	—	55.6	67.4	—	—	207	207	218	—	94.6	(15.2)	—	32	690
—	534	569	77.8	—	53.5	65.8	71	1985	201	201	212	—	93.8	(13.8)	—	31	675
—	—	579	78.0	—	54.0	66.1	—	2015	197	197	207	—	92.8	(12.7)	—	30	655
—	534	569	77.8	—	53.5	65.8	71	1985	192	192	202	—	91.9	(11.5)	—	29	640
—	—	533	77.1	—	52.5	65.0	—	1915	187	187	196	—	90.7	(10.0)	—	—	620
—	514	547	76.9	—	52.1	64.7	70	1890	183	183	192	—	90.0	(9.0)	—	28	615
(495)	—	539	76.7	—	51.6	64.3	—	1855	179	179	188	—	89.0	(8.0)	—	27	600
—	—	530	76.4	—	51.1	63.9	—	1825	174	174	182	—	87.8	(6.4)	—	—	585
—	495	528	76.3	—	51.0	63.8	68	1820	170	170	178	—	86.8	(5.4)	—	26	570
(477)	—	516	75.9	—	50.3	63.2	—	1780	167	167	175	—	86.0	(4.4)	—	—	560
—	—	508	75.6	—	49.6	62.7	—	1740	163	163	171	—	85.0	(3.3)	—	25	545
—	477	508	75.6	—	49.6	62.7	66	1740	156	156	163	—	82.9	(0.9)	—	—	525
(461)	—	495	75.1	—	48.8	61.9	—	1680	149	149	156	—	80.8	—	—	23	505
—	—	491	74.9	—	48.5	61.7	—	1670	143	143	150	—	78.7	—	—	22	490
—	461	491	74.9	—	48.5	61.7	65	1670	137	137	143	—	76.4	—	—	21	460
444	—	474	74.3	—	47.2	61.0	—	1595	126	126	132	—	72.0	—	—	20	435
—	—	472	74.2	—	47.1	60.8	—	1585	121	121	127	—	69.8	—	—	19	415
—	444	472	74.2	—	47.1	60.8	63	1585	116	116	122	—	67.6	—	—	18	400
—	—	472	74.2	—	47.1	60.8	63	1585	111	111	117	—	65.7	—	—	15	385

(Note 1) Above list is the same as that at AMS Metals Hand book with tensile strength in approximate metric value and Brinell hardness over a recommended range.

(Note 2) 1MPa=1N/mm²

(Note 3) Figures in () are rarely used and are included for reference. This list has been taken from JIS Handbook Steel I.

FIT TOLERANCE TABLE (HOLE)

Classification of Standard Dimensions (mm)		Class of Geometrical Tolerance Zone of Holes															
>	≤	B10	C9	C10	D8	D9	D10	E7	E8	E9	F6	F7	F8	G6	G7	H6	H7
—	3	+180	+85	+100	+34	+45	+60	+24	+28	+39	+12	+16	+20	+8	+12	+6	+10
		+140	+60	+60	+20	+20	+20	+14	+14	+14	+6	+6	+6	+2	+2	0	0
3	6	+188	+100	+118	+48	+60	+78	+32	+38	+50	+18	+22	+28	+12	+16	+8	+12
		+140	+70	+70	+30	+30	+30	+20	+20	+20	+10	+10	+10	+4	+4	0	0
6	10	+208	+116	+138	+62	+76	+98	+40	+47	+61	+22	+28	+35	+14	+20	+9	+15
		+150	+80	+80	+40	+40	+40	+25	+25	+25	+13	+13	+13	+5	+5	0	0
10	14	+220	+138	+165	+77	+93	+120	+50	+59	+75	+27	+34	+43	+17	+24	+11	+18
		+150	+95	+95	+50	+50	+50	+32	+32	+32	+16	+16	+16	+6	+6	0	0
14	18	+244	+162	+194	+98	+117	+149	+61	+73	+92	+33	+41	+53	+20	+28	+13	+21
		+160	+110	+110	+65	+65	+65	+40	+40	+40	+20	+20	+20	+7	+7	0	0
18	24	+270	+182	+220	+119	+142	+180	+75	+89	+112	+41	+50	+64	+25	+34	+16	+25
		+170	+120	+120	+80	+80	+80	+50	+50	+50	+25	+25	+25	+9	+9	0	0
30	40	+280	+192	+230	+146	+174	+220	+90	+106	+134	+49	+60	+76	+29	+40	+19	+30
		+180	+130	+130	+100	+100	+100	+60	+60	+60	+30	+30	+30	+10	+10	0	0
40	50	+320	+224	+270	+208	+245	+305	+125	+148	+185	+68	+83	+106	+39	+54	+25	+40
		+200	+150	+150	+145	+145	+145	+85	+85	+85	+43	+43	+43	+14	+14	0	0
50	65	+360	+257	+310	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+220	+170	+170	+170	+170	+170	+100	+100	+100	+50	+50	+50	+15	+15	0	0
65	80	+380	+267	+320	+242	+285	+355	+146	+172	+215	+79	+96	+122	+44	+61	+29	+46
		+240	+180	+180	+170	+170	+170	+100	+100	+100	+50	+50	+50	+15	+15	0	0
80	100	+420	+300	+360	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+260	+200	+200	+190	+190	+190	+110	+110	+110	+56	+56	+56	+17	+17	0	0
100	120	+440	+310	+370	+299	+350	+440	+182	+214	+265	+98	+119	+151	+54	+75	+36	+57
		+280	+210	+210	+210	+210	+210	+125	+125	+125	+62	+62	+62	+18	+18	0	0
120	140	+470	+330	+390	+210	+210	+210	+125	+125	+125	+62	+62	+62	+18	+18	0	0
		+310	+230	+230	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
140	160	+525	+355	+425	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+340	+240	+240	+190	+190	+190	+110	+110	+110	+56	+56	+56	+17	+17	0	0
160	180	+565	+375	+445	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+380	+260	+260	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
180	200	+605	+395	+465	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+420	+280	+280	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
200	225	+690	+430	+510	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+480	+300	+300	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
225	250	+750	+460	+540	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+540	+330	+330	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
250	280	+830	+500	+590	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+600	+360	+360	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
280	315	+910	+540	+630	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+680	+400	+400	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
315	355	+1010	+595	+690	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+760	+440	+440	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
355	400	+1090	+635	+730	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+840	+480	+480	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
400	450	+1100	+640	+740	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+840	+480	+480	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
450	500	+1100	+640	+740	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52
		+840	+480	+480	+271	+320	+400	+162	+191	+240	+88	+108	+137	+49	+69	+32	+52

(Note) Values shown in the upper portion of respective lines are upper dimensional tolerance, while values shown in the lower portion of respective lines are lower dimensional tolerance.

Class of Geometrical Tolerance Zone of Holes

H8	H9	H10	JS6	JS7	K6	K7	M6	M7	N6	N7	P6	P7	R7	S7	T7	U7	X7
+14 0	+25 0	+40 0	± 3	± 5	0 -6	0 -10	-2 -8	-2 -12	-4 -10	-4 -14	-6 -12	-6 -16	-10 -20	-14 -24	-	-18 -28	-20 -30
+18 0	+30 0	+48 0	± 4	± 6	+2 -6	+3 -9	-1 -9	0 -12	-5 -13	-4 -16	-9 -17	-8 -20	-11 -23	-15 -27	-	-19 -31	-24 -36
+22 0	+36 0	+58 0	± 4.5	± 7	+2 -7	+5 -10	-3 -12	0 -15	-7 -16	-4 -19	-12 -21	-9 -24	-13 -28	-17 -32	-	-22 -37	-28 -43
+27 0	+43 0	+70 0	± 5.5	± 9	+2 -9	+6 -12	-4 -15	0 -18	-9 -20	-5 -23	-15 -26	-11 -29	-16 -34	-21 -39	-	-26 -44	-33 -51 -38 -56
+33 0	+52 0	+84 0	± 6.5	± 10	+2 -11	+6 -15	-4 -17	0 -21	-11 -24	-7 -28	-18 -31	-14 -35	-20 -41	-27 -48	-	-33 -54 -40 -61	-46 -67 -56 -77
+39 0	+62 0	+100 0	± 8	± 12	+3 -13	+7 -18	-4 -20	0 -25	-12 -28	-8 -33	-21 -37	-17 -42	-25 -50	-34 -59	-	-39 -64 -45 -61 -70 -86	-51 -76 -61 -86
+46 0	+74 0	+120 0	± 9.5	± 15	+4 -15	+9 -21	-5 -24	0 -30	-14 -33	-9 -39	-26 -45	-21 -51	-30 -60 -32 -62	-42 -72 -48 -78	-	-55 -85 -64 -91 -94 -121	-76 -106 -91 -121
+54 0	+87 0	+140 0	± 11	± 17	+4 -18	+10 -25	-6 -28	0 -35	-16 -38	-10 -45	-30 -52	-24 -59	-38 -73 -41 -76	-58 -93 -66 -101	-	-78 -113 -91 -126 -131 -166	-111 -146 -131 -166
+63 0	+100 0	+160 0	± 12.5	± 20	+4 -21	+12 -28	-8 -33	0 -40	-20 -45	-12 -52	-36 -61	-28 -68	-48 -88 -50 -90 -53 -93	-77 -117 -85 -125 -93 -133	-	-107 -147 -119 -159 -131 -171	-
+72 0	+115 0	+185 0	± 14.5	± 23	+5 -24	+13 -33	-8 -37	0 -46	-22 -51	-14 -60	-41 -70	-33 -79	-60 -106 -63 -109 -67 -113	-105 -151 -113 -159 -123 -169	-	-	-
+81 0	+130 0	+210 0	± 16	± 26	+5 -27	+16 -36	-9 -41	0 -52	-25 -57	-14 -66	-47 -79	-36 -88	-74 -126 -78 -130	-	-	-	-
+89 0	+140 0	+230 0	± 18	± 28	+7 -29	+17 -40	-10 -46	0 -57	-26 -62	-16 -73	-51 -87	-41 -98	-87 -144 -93 -150	-	-	-	-
+97 0	+155 0	+250 0	± 20	± 31	+8 -32	+18 -45	-10 -50	0 -63	-27 -67	-17 -80	-55 -95	-45 -108	-103 -166 -109 -172	-	-	-	-

FIT TOLERANCE TABLE (SHAFTS)

Classification of Standard Dimensions (mm)		Class of Geometrical Tolerance Zone of Shafts														
>	≤	b9	c9	d8	d9	e7	e8	e9	f6	f7	f8	g5	g6	h5	h6	h7
—	3	-140	-60	-20	-20	-14	-14	-14	-6	-6	-6	-2	-2	0	0	0
		-165	-85	-34	-45	-24	-28	-39	-12	-16	-20	-6	-8	-4	-6	-10
3	6	-140	-70	-30	-30	-20	-20	-20	-10	-10	-10	-4	-4	0	0	0
		-170	-100	-48	-60	-32	-38	-50	-18	-22	-28	-9	-12	-5	-8	-12
6	10	-150	-80	-40	-40	-25	-25	-25	-13	-13	-13	-5	-5	0	0	0
		-186	-116	-62	-76	-40	-47	-61	-22	-28	-35	-11	-14	-6	-9	-15
10	14	-150	-95	-50	-50	-32	-32	-32	-16	-16	-16	-6	-6	0	0	0
		-193	-138	-77	-93	-50	-59	-75	-27	-34	-43	-14	-17	-8	-11	-18
18	24	-160	-110	-65	-65	-40	-40	-40	-20	-20	-20	-7	-7	0	0	0
		-212	-162	-98	-117	-61	-73	-92	-33	-41	-53	-16	-20	-9	-13	-21
30	40	-170	-120	-80	-80	-50	-50	-50	-25	-25	-25	-9	-9	0	0	0
		-232	-182													
40	50	-180	-130	-119	-142	-75	-89	-112	-41	-50	-64	-20	-25	-11	-16	-25
		-242	-192													
50	65	-190	-140	-100	-100	-60	-60	-60	-30	-30	-30	-10	-10	0	0	0
		-264	-214													
65	80	-200	-150	-146	-174	-90	-106	-134	-49	-60	-76	-23	-29	-13	-19	-30
		-274	-224													
80	100	-220	-170	-120	-120	-72	-72	-72	-36	-36	-36	-12	-12	0	0	0
		-307	-257													
100	120	-240	-180	-174	-207	-107	-126	-159	-58	-71	-90	-27	-34	-15	-22	-35
		-327	-267													
120	140	-260	-200	-145	-145	-85	-85	-85	-43	-43	-43	-14	-14	0	0	0
		-360	-300													
140	160	-280	-210	-208	-245	-125	-148	-185	-68	-83	-106	-32	-39	-18	-25	-40
		-380	-310													
160	180	-310	-230	-208	-245	-125	-148	-185	-68	-83	-106	-32	-39	-18	-25	-40
		-410	-330													
180	200	-340	-240	-170	-170	-100	-100	-100	-50	-50	-50	-15	-15	0	0	0
		-455	-355													
200	225	-380	-260	-242	-285	-146	-172	-215	-79	-96	-122	-35	-44	-20	-29	-46
		-495	-375													
225	250	-420	-280	-242	-285	-146	-172	-215	-79	-96	-122	-35	-44	-20	-29	-46
		-535	-395													
250	280	-480	-300	-190	-190	-110	-110	-110	-56	-56	-56	-17	-17	0	0	0
		-610	-430													
280	315	-540	-330	-271	-320	-162	-191	-240	-88	-108	-137	-40	-49	-23	-32	-52
		-670	-460													
315	355	-600	-360	-210	-210	-125	-125	-125	-62	-62	-62	-18	-18	0	0	0
		-740	-500													
355	400	-680	-400	-299	-350	-182	-214	-265	-98	-119	-151	-43	-54	-25	-36	-57
		-820	-540													
400	450	-760	-440	-230	-230	-135	-135	-135	-68	-68	-68	-20	-20	0	0	0
		-915	-595													
450	500	-840	-480	-327	-385	-198	-232	-290	-108	-131	-165	-47	-60	-27	-40	-63
		-995	-635													

(Note) Values shown in the upper portion of respective lines are upper dimensional tolerance, while values shown in the lower portion of respective lines are lower dimensional tolerance.

Class of Geometrical Tolerance Zone of Shafts

h8	h9	js5	js6	js7	k5	k6	m5	m6	n6	p6	r6	s6	t6	u6	x6
0 -14	0 -25	± 2	± 3	± 5	+4 0	+6 0	+6 +2	+8 +2	+10 +4	+12 +6	+16 +10	+20 +14	—	+24 +18	+26 +20
0 -18	0 -30	± 2.5	± 4	± 6	+6 +1	+9 +1	+9 +4	+12 +4	+16 +8	+20 +12	+23 +15	+27 +19	—	+31 +23	+36 +28
0 -22	0 -36	± 3	± 4.5	± 7	+7 +1	+10 +1	+12 +6	+15 +6	+19 +10	+24 +15	+28 +19	+32 +23	—	+37 +28	+43 +34
0 -27	0 -43	± 4	± 5.5	± 9	+9 +1	+12 +1	+15 +7	+18 +7	+23 +12	+29 +18	+34 +23	+39 +28	—	+44 +33	+51 +40 +56 +45
0 -33	0 -52	± 4.5	± 6.5	± 10	+11 +2	+15 +2	+17 +8	+21 +8	+28 +15	+35 +22	+41 +28	+48 +35	— +54 +41	+54 +41 +61 +48	+67 +54 +77 +64
0 -39	0 -62	± 5.5	± 8	± 12	+13 +2	+18 +2	+20 +9	+25 +9	+33 +17	+42 +26	+50 +34	+59 +43	+64 +48 +70 +54	+76 +60 +86 +70	—
0 -46	0 -74	± 6.5	± 9.5	± 15	+15 +2	+21 +2	+24 +11	+30 +11	+39 +20	+51 +32	+60 +41 +62 +43	+72 +53 +78 +59	+85 +66 +94 +75	+106 +87 +121 +102	—
0 -54	0 -87	± 7.5	± 11	± 17	+18 +3	+25 +3	+28 +13	+35 +13	+45 +23	+59 +37	+73 +51 +76 +54	+93 +71 +101 +79	+113 +91 +126 +104	+146 +124 +166 +144	—
0 -63	0 -100	± 9	± 12.5	± 20	+21 +3	+28 +3	+33 +15	+40 +15	+52 +27	+68 +43	+88 +63 +90 +65 +93 +68	+117 +92 +125 +100 +133 +108	+147 +122 +159 +134 +171 +146	—	—
0 -72	0 -115	± 10	± 14.5	± 23	+24 +4	+33 +4	+37 +17	+46 +17	+60 +31	+79 +50	+106 +77 +109 +80 +113 +84	+151 +122 +159 +130 +169 +140	—	—	—
0 -81	0 -130	± 11.5	± 16	± 26	+27 +4	+36 +4	+43 +20	+52 +20	+66 +34	+88 +56	+126 +94 +130 +98	—	—	—	—
0 -89	0 -140	± 12.5	± 18	± 28	+29 +4	+40 +4	+46 +21	+57 +21	+73 +37	+98 +62	+144 +108 +150 +114	—	—	—	—
0 -97	0 -155	± 13.5	± 20	± 31	+32 +5	+45 +5	+50 +23	+63 +23	+80 +40	+108 +68	+166 +126 +172 +132	—	—	—	—

TECHNICAL DATA

DRILL DIAMETERS FOR PREPARED HOLES

● Metric Coarse Screw Thread

Nominal	Drill Diameter	
	HSS	Carbide
M1 ×0.25	0.75	0.75
M1.1×0.25	0.85	0.85
M1.2×0.25	0.95	0.95
M1.4×0.3	1.10	1.10
M1.6×0.35	1.25	1.30
M1.7×0.35	1.35	1.40
M1.8×0.35	1.45	1.50
M2 ×0.4	1.60	1.65
M2.2×0.45	1.75	1.80
M2.3×0.4	1.90	1.95
M2.5×0.45	2.10	2.15
M2.6×0.45	2.15	2.20
M3 ×0.5	2.50	2.55
M3.5×0.6	2.90	2.95
M4 ×0.7	3.3	3.4
M4.5×0.75	3.8	3.9
M5 ×0.8	4.2	4.3
M6 ×1.0	5.0	5.1
M7 ×1.0	6.0	6.1
M8 ×1.25	6.8	6.9
M9 ×1.25	7.8	7.9
M10 ×1.5	8.5	8.7
M11 ×1.5	9.5	9.7
M12 ×1.75	10.3	10.5
M14 ×2.0	12.0	12.2
M16 ×2.0	14.0	14.2
M18 ×2.5	15.5	15.7
M20 ×2.5	17.5	17.7
M22 ×2.5	19.5	19.7
M24 ×3.0	21.0	—
M27 ×3.0	24.0	—
M30 ×3.5	26.5	—
M33 ×3.5	29.5	—
M36 ×4.0	32.0	—
M39 ×4.0	35.0	—
M42 ×4.5	37.5	—
M45 ×4.5	40.5	—
M48 ×5.0	43.0	—

● Metric Fine Screw Thread

Nominal	Drill Diameter		Nominal	Drill Diameter		Nominal	Drill Diameter	
	HSS	Carbide		HSS	Carbide		HSS	Carbide
M1 ×0.2	0.80	0.80	M20 ×2.0	18.0	18.3	M42 ×3.0	39.0	—
M1.1×0.2	0.90	0.90	M20 ×1.5	18.5	18.7	M42 ×2.0	40.0	—
M1.2×0.2	1.00	1.00	M20 ×1.0	19.0	19.1	M42 ×1.5	40.5	—
M1.4×0.2	1.20	1.20	M22 ×2.0	20.0	—	M45 ×4.0	41.0	—
M1.6×0.2	1.40	1.40	M22 ×1.5	20.5	—	M45 ×3.0	42.0	—
M1.8×0.2	1.60	1.60	M22 ×1.0	21.0	—	M45 ×2.0	43.0	—
M2 ×0.25	1.75	1.75	M24 ×2.0	22.0	—	M45 ×1.5	43.5	—
M2.2×0.25	1.95	2.00	M24 ×1.5	22.5	—	M48 ×4.0	44.0	—
M2.5×0.35	2.20	2.20	M24 ×1.0	23.0	—	M48 ×3.0	45.0	—
M3 ×0.35	2.70	2.70	M25 ×2.0	23.0	—	M48 ×2.0	46.0	—
M3.5×0.35	3.20	3.20	M25 ×1.5	23.5	—	M48 ×1.5	46.5	—
M4 ×0.5	3.50	3.55	M25 ×1.0	24.0	—	M50 ×3.0	47.0	—
M4.5×0.5	4.00	4.05	M26 ×1.5	24.5	—	M50 ×2.0	48.0	—
M5 ×0.5	4.50	4.55	M27 ×2.0	25.0	—	M50 ×1.5	48.5	—
M5.5×0.5	5.00	5.05	M27 ×1.5	25.5	—			
M6 ×0.75	5.30	5.35	M27 ×1.0	26.0	—			
M7 ×0.75	6.30	6.35	M28 ×2.0	26.0	—			
M8 ×1.0	7.00	7.10	M28 ×1.5	26.5	—			
M8 ×0.75	7.30	7.35	M28 ×1.0	27.0	—			
M9 ×1.0	8.00	8.10	M30 ×3.0	27.0	—			
M9 ×0.75	8.30	8.35	M30 ×2.0	28.0	—			
M10 ×1.25	8.80	8.90	M30 ×1.5	28.5	—			
M10 ×1.0	9.00	9.10	M30 ×1.0	29.0	—			
M10 ×0.75	9.30	9.35	M32 ×2.0	30.0	—			
M11 ×1.0	10.0	10.1	M32 ×1.5	30.5	—			
M11 ×0.75	10.3	10.3	M33 ×3.0	30.0	—			
M12 ×1.5	10.5	10.7	M33 ×2.0	31.0	—			
M12 ×1.25	10.8	10.9	M33 ×1.5	31.5	—			
M12 ×1.0	11.0	11.1	M35 ×1.5	33.5	—			
M14 ×1.5	12.5	12.7	M36 ×3.0	33.0	—			
M14 ×1.0	13.0	13.1	M36 ×2.0	34.0	—			
M15 ×1.5	13.5	13.7	M36 ×1.5	34.5	—			
M15 ×1.0	14.0	14.1	M38 ×1.5	36.5	—			
M16 ×1.5	14.5	14.7	M39 ×3.0	36.0	—			
M16 ×1.0	15.0	15.1	M39 ×2.0	37.0	—			
M17 ×1.5	15.5	15.7	M39 ×1.5	37.5	—			
M17 ×1.0	16.0	16.1	M40 ×3.0	37.0	—			
M18 ×2.0	16.0	16.3	M40 ×2.0	38.0	—			
M18 ×1.5	16.5	16.7	M40 ×1.5	38.5	—			
M18 ×1.0	17.0	17.1	M42 ×4.0	38.0	—			



(Note) When using the drill diameters shown in this table, that the processed hole should be measured since the size accuracy of a drill hole may change due to the drilling condition, and that if found to be inappropriate for a prepared hole, the drill diameter must be corrected accordingly.

HEXAGON SOCKET HEAD BOLT HOLE SIZE

**DIMENSIONS OF COUNTERBORING FOR
HEXAGON SOCKET HEAD CAP SCREW AND BOLT HOLE**

Unit : mm

Nominal dimensions of thread d	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
d₁	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
d'	3.4	4.5	5.5	6.6	9	11	14	16	18	20	22	24	26	30	33
D	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45
D'	6.5	8	9.5	11	14	17.5	20	23	26	29	32	35	39	43	48
H	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
H'	2.7	3.6	4.6	5.5	7.4	9.2	11	12.8	14.5	16.5	18.5	20.5	22.5	25	28
H''	3.3	4.4	5.4	6.5	8.6	10.8	13	15.2	17.5	19.5	21.5	23.5	25.5	29	32



TAPER STANDARD

Fig.1
Bolt Grip Taper


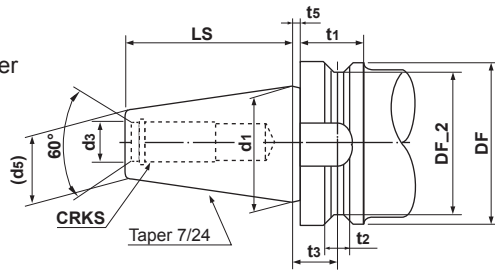


Fig.2
National Taper

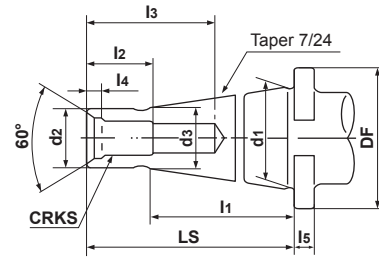

● **Table 1 Bolt Grip Taper (Fig.1)**

Bearing Number	DF	DF_2	t1	t2	t3	t5	d1	d3	LS	CRKS	d5
BT35	53	43	20	10	13.0	2	38.1	13	56.5	M12×1.75	21.62
BT40	63	53	25	10	16.6	2	44.45	17	65.4	M16×2	25.3
BT45	85	73	30	12	21.2	3	57.15	21	82.8	M20×2.5	33.1
BT50	100	85	35	15	23.2	3	69.85	25	101.8	M24×3	40.1
BT60	155	135	45	20	28.2	3	107.95	31	161.8	M30×3.5	60.7

● **Table 2 National Taper (Fig.2)**

Bearing Number	d1	d2	LS	l1	CRKS		l2	l3	d3	l4	DF	l5
					Metric Screw	Wit Screw						
NT30	31.75	17.4	70	50	M12	W 1/2	24	50	16.5	6	50	8
NT40	44.45	25.3	95	67	M16	W 5/8	30	70	24	7	63	10
NT50	69.85	39.6	130	105	M24	W 1	45	90	38	11	100	13
NT60	107.95	60.2	210	165	M30	W 1 1/4	56	110	58	12	170	15

Fig.3
Morse Taper
(Shank with Tongue)


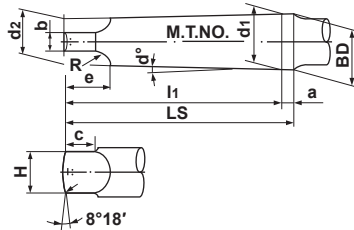


Fig.4
Morse Taper
(Shank with Screw)

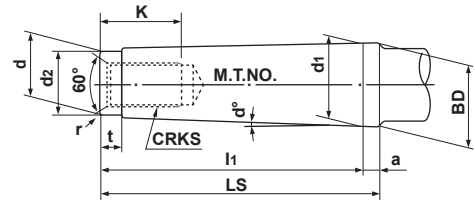

● **Table 3 Shank with Tongue (Fig.3)**

Morse Taper Number	d1	a	BD	d2	H	l1	LS	d	c	e	R	r
0	9.045	3	9.201	6.104	6	56.5	59.5	3.9	6.5	10.5	4	1
1	12.065	3.5	12.240	8.972	8.7	62.0	65.5	5.2	8.5	13.5	5	1.2
2	17.780	5	18.030	14.034	13.5	75.0	80.0	6.3	10	16	6	1.6
3	23.825	5	24.076	19.107	18.5	94.0	99	7.9	13	20	7	2
4	31.267	6.5	31.605	25.164	24.5	117.5	124	11.9	16	24	8	2.5
5	44.399	6.5	44.741	36.531	35.7	149.5	156	15.9	19	29	10	3
6	63.348	8	63.765	52.399	51.0	210.0	218	19	27	40	13	4
7	83.058	10	83.578	68.185	66.8	286.0	296	28.6	35	54	19	5

● **Table 4 Shank with Screw (Fig.4)**

Morse Taper Number	d1	a	BD	d	d2	l1	LS	t	r	CRKS	K
0	9.045	3	9.201	6.442	6	50	53	4	0.2	—	—
1	12.065	3.5	12.240	9.396	9	53.5	57	5	0.2	M6	16
2	17.780	5	18.030	14.583	14	64	69	5	0.2	M10	24
3	23.825	5	24.076	19.759	19	81	86	7	0.6	M12	28
4	31.267	6.5	31.605	25.943	25	102.5	109	9	1.0	M16	32
5	44.399	6.5	44.741	37.584	35.7	129.5	136	9	2.5	M20	40
6	63.348	8	63.765	53.859	51	182	190	12	4.0	M24	50
7	83.058	10	83.578	70.052	65	250	260	18.5	5.0	M33	80

INTERNATIONAL SYSTEM OF UNITS

UNIT CONVERSION TABLE for EASIER CHANGE into SI UNITS (Bold type Indicates SI unit)

● Pressure

Pa	kPa	MPa	bar	kgf/cm ²	atm	mmH ₂ O	mmHg or Torr
1	1×10 ⁻³	1×10 ⁻⁶	1×10 ⁻⁵	1.01972×10 ⁻⁵	9.86923×10 ⁻⁶	1.01972×10 ⁻¹	7.50062×10 ⁻³
1×10 ³	1	1×10 ⁻³	1×10 ⁻²	1.01972×10 ⁻²	9.86923×10 ⁻³	1.01972×10 ²	7.50062
1×10 ⁶	1×10 ³	1	1×10	1.01972×10	9.86923	1.01972×10 ⁵	7.50062×10 ³
1×10 ⁵	1×10 ²	1×10 ⁻¹	1	1.01972	9.86923×10 ⁻¹	1.01972×10 ⁴	7.50062×10 ²
9.80665×10 ⁴	9.80665×10	9.80665×10 ⁻²	9.80665×10 ⁻¹	1	9.67841×10 ⁻¹	1×10 ⁴	7.35559×10 ²
1.01325×10 ⁵	1.01325×10 ²	1.01325×10 ⁻¹	1.01325	1.03323	1	1.03323×10 ⁴	7.60000×10 ²
9.80665	9.80665×10 ⁻³	9.80665×10 ⁻⁶	9.80665×10 ⁻⁵	1×10 ⁻⁴	9.67841×10 ⁻⁵	1	7.35559×10 ⁻²
1.33322×10 ²	1.33322×10 ⁻¹	1.33322×10 ⁻⁴	1.33322×10 ⁻³	1.35951×10 ⁻³	1.31579×10 ⁻³	1.35951×10	1

(Note) 1Pa=1N/m²

● Force

N	dyn	kgf
1	1×10 ⁵	1.01972×10 ⁻¹
1×10 ⁻⁵	1	1.01972×10 ⁻⁶
9.80665	9.80665×10 ⁵	1

● Stress

Pa	MPa or N/mm ²	kgf/mm ²	kgf/cm ²
1	1×10 ⁻⁶	1.01972×10 ⁻⁷	1.01972×10 ⁻⁵
1×10 ⁶	1	1.01972×10 ⁻¹	1.01972×10
9.80665×10 ⁶	9.80665	1	1×10 ²
9.80665×10 ⁴	9.80665×10 ⁻²	1×10 ⁻²	1

(Note) 1Pa=1N/m²

● Work / Energy / Quantity of Heat

J	kW·h	kgf·m	kcal
1	2.77778×10 ⁻⁷	1.01972×10 ⁻¹	2.38889×10 ⁻⁴
3.600 ×10 ⁶	1	3.67098×10 ⁵	8.6000 ×10 ²
9.80665	2.72407×10 ⁻⁶	1	2.34270×10 ⁻³
4.18605×10 ³	1.16279×10 ⁻³	4.26858×10 ²	1

(Note) 1J=1W·s, 1J=1N·m

1cal=4.18605J

(By the law of weights and measures)

● Power (Rate of Production / Motive Power) /Heat Flow Rate

W	kgf·m/s	PS	kcal/h
1	1.01972×10 ⁻¹	1.35962×10 ⁻³	8.6000 ×10 ⁻¹
9.80665	1	1.33333×10 ⁻²	8.43371
7.355 ×10 ²	7.5 ×10	1	6.32529×10 ²
1.16279	1.18572×10 ⁻¹	1.58095×10 ⁻³	1

(Note) 1W=1J/s, PS:French horse power




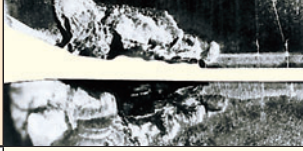





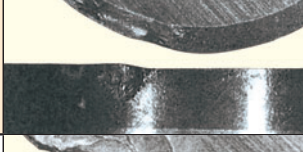

1PS=0.7355kW

(By the enforcement act for the law of weights and measures)

1cal=4.18605J

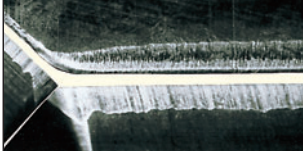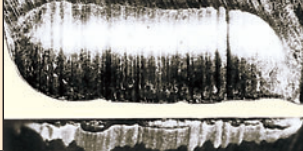
TOOL WEAR AND DAMAGE

CAUSES AND COUNTERMEASURES

Tool Damage Form	Cause	Countermeasure
Flank Wear 	<ul style="list-style-type: none"> • Tool grade is too soft. • Cutting speed is too high. • Flank angle is too small. • Feed rate is extremely low. 	<ul style="list-style-type: none"> • Tool grade with high wear resistance. • Lower cutting speed. • Increase flank angle. • Increase feed rate.
Crater Wear 	<ul style="list-style-type: none"> • Tool grade is too soft. • Cutting speed is too high. • Feed rate is too high. 	<ul style="list-style-type: none"> • Tool grade with high wear resistance. • Lower cutting speed. • Lower feed rate.
Chipping 	<ul style="list-style-type: none"> • Tool grade is too hard. • Feed rate is too high. • Lack of cutting edge strength. • Lack of shank or holder rigidity. 	<ul style="list-style-type: none"> • Tool grade with high toughness. • Lower feed rate. • Increase honing. (Round honing is to be changed to chamfer honing.) • Use large shank size.
Fracture 	<ul style="list-style-type: none"> • Tool grade is too hard. • Feed rate is too high. • Lack of cutting edge strength. • Lack of shank or holder rigidity. 	<ul style="list-style-type: none"> • Tool grade with high toughness. • Lower feed rate. • Increase honing. (Round honing is to be changed to chamfer honing.) • Use large shank size.
Plastic Deformation 	<ul style="list-style-type: none"> • Tool grade is too soft. • Cutting speed is too high. • Depth of cut and feed rate are too large. • Cutting temperature is high. 	<ul style="list-style-type: none"> • Tool grade with high wear resistance. • Lower cutting speed. • Decrease depth of cut and feed rate. • Tool grade with high thermal conductivity.
Welding 	<ul style="list-style-type: none"> • Cutting speed is low. • Poor sharpness. • Unsuitable grade. 	<ul style="list-style-type: none"> • Increase cutting speed. (For JIS S45C, cutting speed 80m/min.) • Increase rake angle. • Tool grade with low affinity. (Coated grade, cermet grade)
Thermal Cracks 	<ul style="list-style-type: none"> • Expansion or shrinkage due to cutting heat. • Tool grade is too hard. *Especially in milling. 	<ul style="list-style-type: none"> • Dry cutting. (For wet cutting, flood workpiece with cutting fluid) • Tool grade with high toughness.
Notching 	<ul style="list-style-type: none"> • Hard surfaces such as uncut surfaces, chilled parts and machining hardened layer. • Friction caused by jagged shape chips. (Caused by small vibration) 	<ul style="list-style-type: none"> • Tool grade with high wear resistance. • Increase rake angle to improve sharpness.
Flaking 	<ul style="list-style-type: none"> • Cutting edge welding and adhesion. • Poor chip disposal. 	<ul style="list-style-type: none"> • Increase rake angle to improve sharpness. • Enlarge chip pocket.
Flank Wear Fracture  <p>*Damage for polycrystallines</p>	<ul style="list-style-type: none"> • Damage due to the lack of strength of a curved cutting edge. 	<ul style="list-style-type: none"> • Increase honing. • Tool grade with high toughness.
Crater Wear Fracture  <p>*Damage for polycrystallines</p>	<ul style="list-style-type: none"> • Tool grade is too soft. • Cutting resistance is too high and causes high cutting heat. 	<ul style="list-style-type: none"> • Decrease honing. • Tool grade with high wear resistance.

CUTTING TOOL MATERIALS

The table below shows the relationship between various tool materials, in relation with hardness on a vertical axis and toughness on a horizontal axis. Today, cemented carbide, coated carbide and TiC-TiN-based cermet are key tool materials in the market. This is because they have the best balance of hardness and toughness.

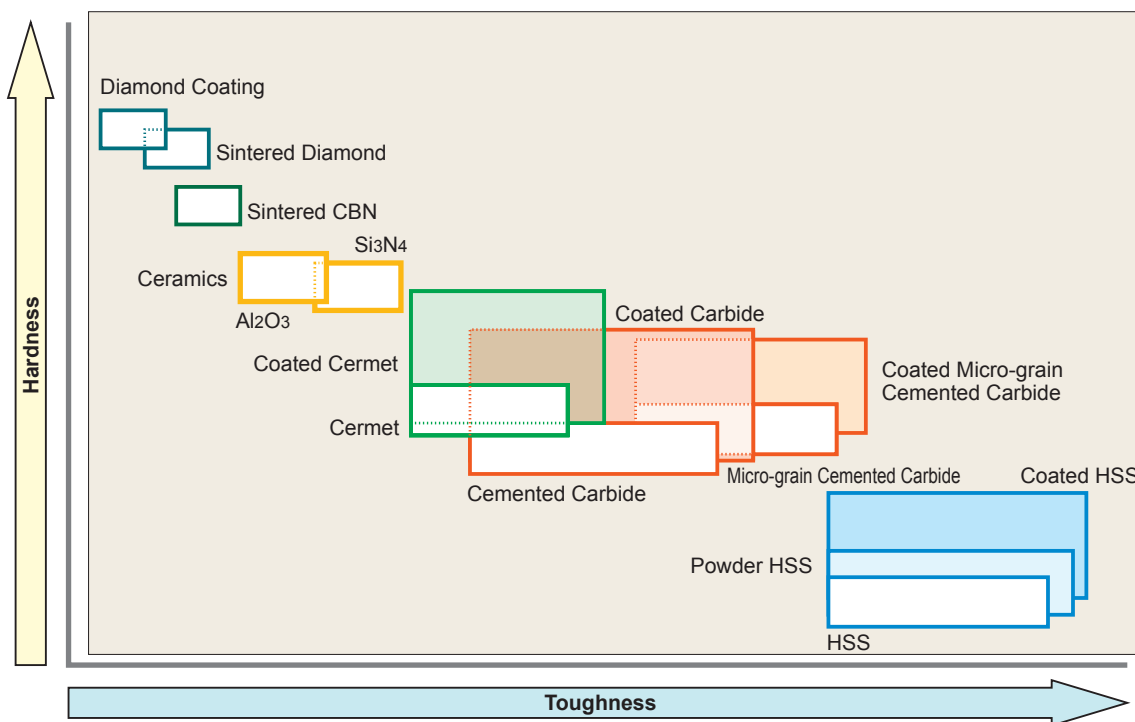


GRADE CHARACTERISTICS

Hard Materials	Hardness (HV)	Energy Formation (kcal/g·atom)	Solubility in Iron (%.1250°C)	Thermal Conductivity (W/m·k)	Thermal Expansion (x 10 ⁻⁶ /k)*	Tool Material
Diamond	>9000	–	Highly Soluble	2100	3.1	Sintered Diamond
CBN	>4500	–	–	1300	4.7	Sintered CBN
Si ₃ N ₄	1600	–	–	100	3.4	Ceramics
Al ₂ O ₃	2100	-100	≠0	29	7.8	Ceramics Cemented Carbide
TiC	3200	-35	< 0.5	21	7.4	Cermet Coated Carbide
TiN	2500	-50	–	29	9.4	Cermet Coated Carbide
TaC	1800	-40	0.5	21	6.3	Cemented Carbide
WC	2100	-10	7	121	5.2	Cemented Carbide

*1W/m·K=2.39×10⁻³cal/cm·sec·°C

GRADE CHAIN

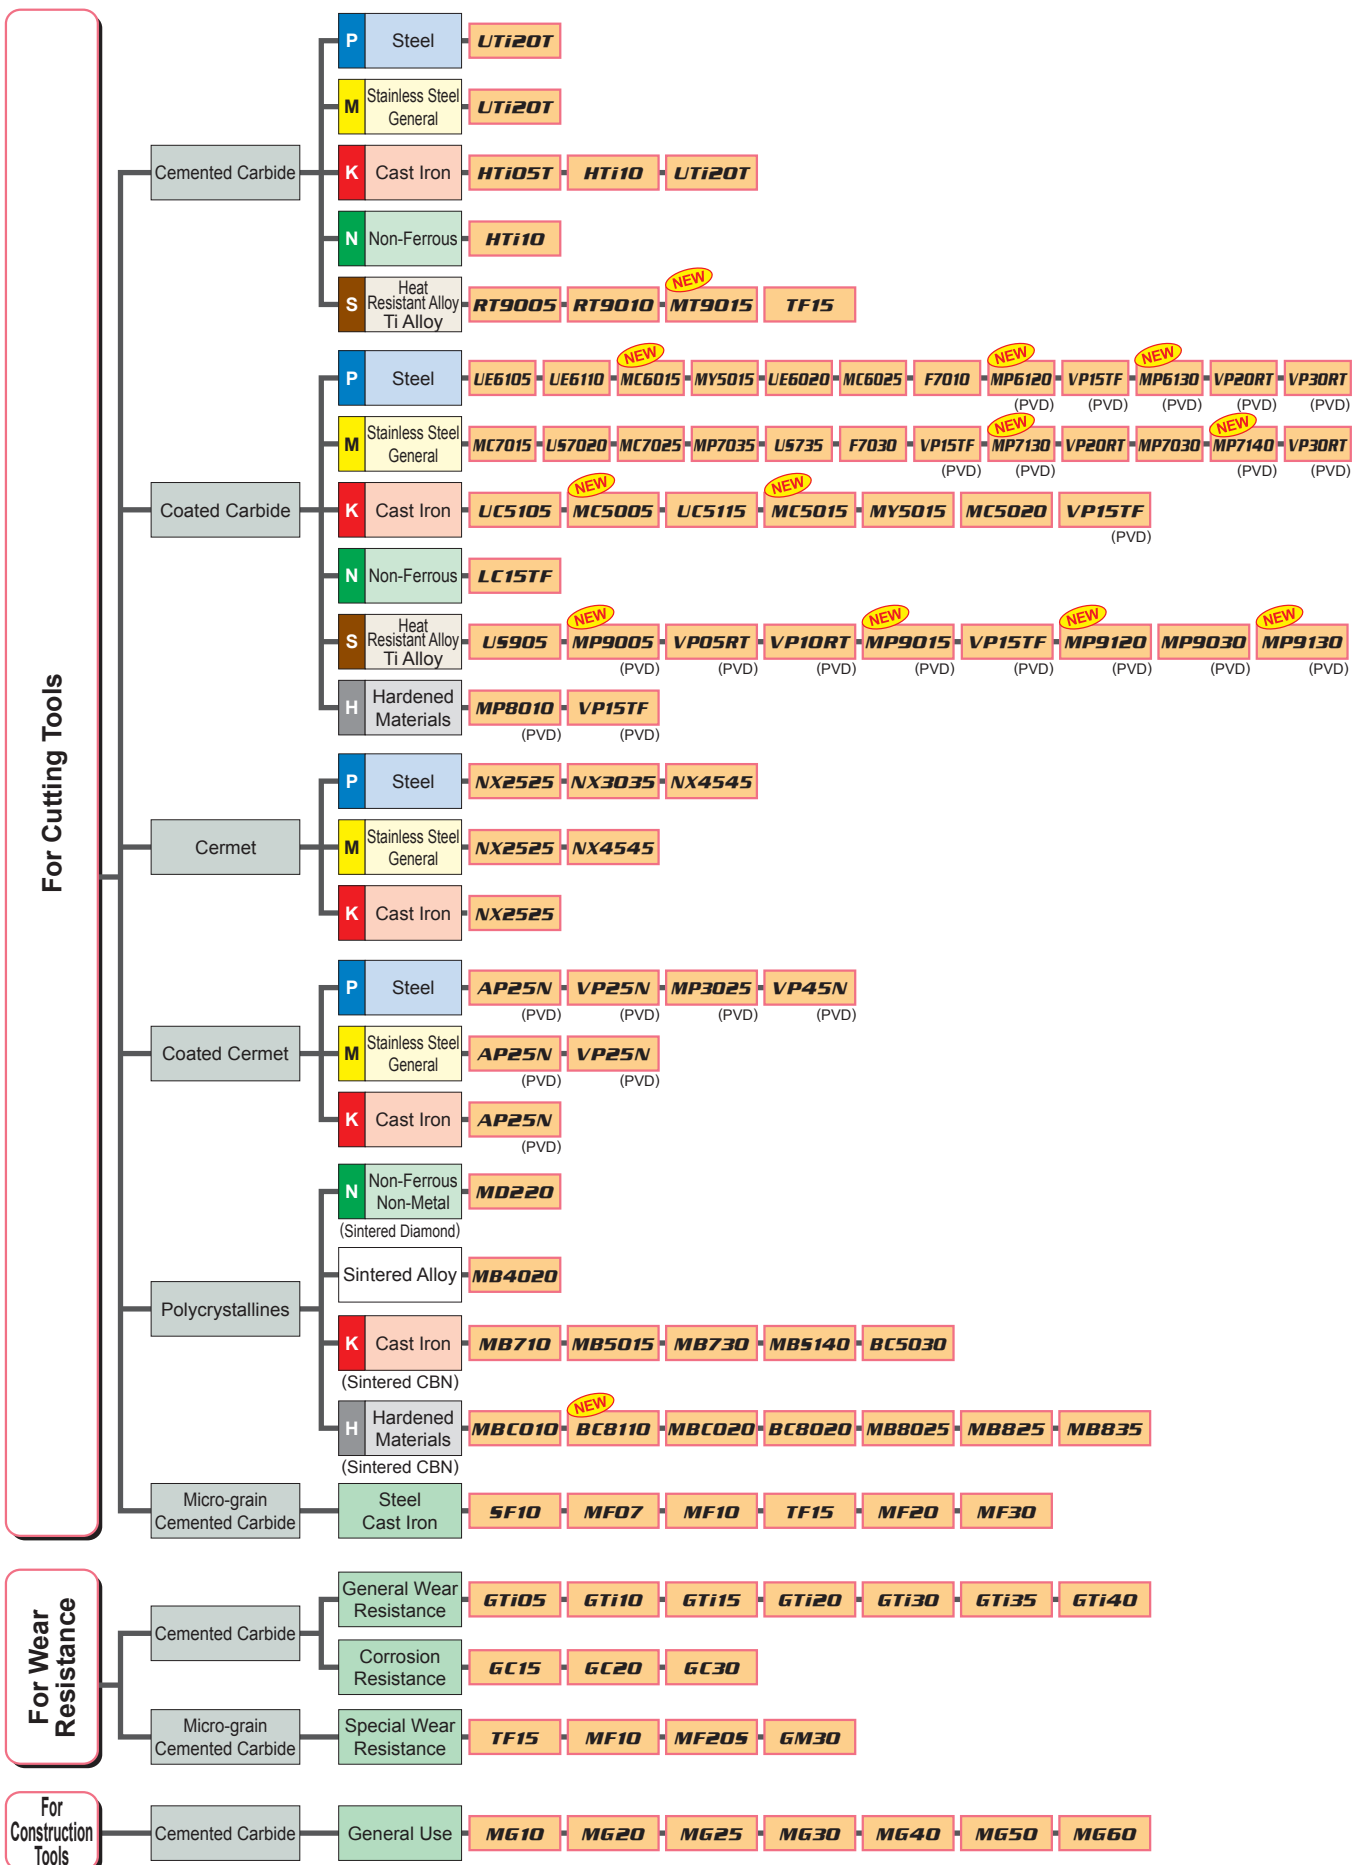

GRADES COMPARISON TABLE

CEMENTED CARBIDE

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Iscar	
	Symbol											
Turning	P	P01										
		P10		ST10P	TX10S		SRT	WS10			IC70	
		P20	UTi20T	ST20E	UX30		SRT DX30	EX35	SMA		IC70 IC50M	
		P30	UTi20T	A30	UX30	PW30	SR30 DX30	EX35	SM30		IC50M IC54	
		P40		ST40E			SR30	EX45			IC54	
	M	M10		EH510 U10E			UMN	WA10B	H10A	KU10 K313 K68	890	IC07
		M20	UTi20T	EH520 U2	UX30		DX25 UMS	EX35	H13A	KU10 K313 K68	HX	IC07 IC08 IC20
		M30	UTi20T	A30	UX30		DX25 UMS	EX45	H10F SM30		883	IC08 IC20 IC28
		M40					UM40	EX45				IC28
	K	K01	HTi05T	H1 H2	TH03 KS05F		KG03	WH05		KU10 K313 K68		
		K10	HTi10	EH10 EH510	TH10	KW10 GW15	KG10 KT9	WH10	H10 HM	KU10 K313 K68	890	IC20
		K20	UTi20T	G10E EH20 EH520	KS15F KS20	GW25	CR1 KG20	WH20	H13A	KU10 K313 K68	HX	IC20
		K30	UTi20T	G10E			KG30				883	
	N	N01		H1 H2	KS05F	KW10			H10 H13A			
		N10	HTi10	EH10 EH510	TH10	KW10 GW15	KT9	WH10		KU10 K313 K68	H15	IC08 IC20
		N20		G10E EH20 EH520	KS15F		CR1	WH20		KU10 K313 K68	HX	IC08 IC20
		N30									H25	
	S	S01	RT9005			SW05	KG03					
		S10	RT9005 RT9010 MT9015	EH10 EH510	KS05F TH10	SW10	FZ05 KG10		H10 H10A H10F H13A	K10 K313 K68	HX	IC07 IC08
		S20	RT9010 TF15	EH20 EH520	KS15F KS20	SW25	FZ15 KG20			K10 K313 K68	H25	IC07 IC08
S30		TF15				KG30						
Milling	P	P10				SRT						
		P20	UTi20T	A30N	UX30		SRT DX30	EX35		K125M		IC50M IC28
		P30	UTi20T	A30N	UX30	PW30	SR30 DX30	EX35		GX		IC50M IC28
		P40				PW30	SR30	EX45				IC28
	M	M10					UMN					
		M20	UTi20T	A30N	UX30		DX25 UMS	EX35				IC08 IC20
		M30	UTi20T	A30N	UX30		DX25 UMS	EX45	SM30			IC08 IC28
		M40						EX45				IC28
	K	K01	HTi05T				KG03			K115M, K313		
		K10	HTi10	G10E	TH10	KW10 GW25	KG10	WH10		K115M K313		IC20
		K20	UTi20T	G10E	KS20	GW25	KT9 CR1 KG20	WH20	H13A		HX	IC20
		K30	UTi20T				KG30					

(Note) The above table is selected from a publication. We have not obtained approval from each company.

GRADES COMPARISON TABLE

MICRO GRAIN

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools		
	Symbol											
Cutting Tools	Z	Z01	SF10 MF07 MF10	F0	F MD05F MD1508		FZ05 FB05 FB10	NM08	PN90 6UF,H3F 8UF,H6F			
		Z10	HTi10 MF20	XF1 F1 AFU	MD10 MD0508 MD07F	FW30	FZ10 FZ15 FB15	NM15	H10F		890	
		Z20	TF15 MF30	AF0 SF2 AF1				FZ15 FB15 FB20	BRM20 EF20N	H15F		890 883
		Z30		A1 CC				FZ20 FB20	NM25			883

CERMET

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Iscar		
	Symbol												
Turning	P	P01	AP25N* VP25N*	T110A T1000A	NS520 AT520* GT520* GT720*	TN30 PV30* TN6010 PV7010*	LN10 CX50				IC20N IC520N*		
		P10	NX2525 AP25N* VP25N*	T1200A T2000Z* T1500A T1500Z*	NS520 NS730 GT730* NS9530 GT9530*	TN60 PV60* TN6010 PV7010*	CX50 CX75 PX75*	CZ25*	CT5015 GC1525*	KT315 KT125	TP1020 TP1030* CM CMP*	IC20N IC520N* IC530N*	
		P20	NX2525 AP25N* VP25N* NX3035 MP3025* VP45N*	T1200A T2000Z* T3000Z* T1500A T1500Z*	NS530 NS730 GT730* NS9530 GT9530*	TN60 PV60* TN6020 PV7020* PV7025*	CX75 PX75* PX90*	CH550	GC1525*	KT325 KT1120 KT5020*	TP1020 TP1030*	IC20N IC520N* IC30N IC530N* IC75T	
		P30	MP3025* VP45N*	T3000Z*		PV7025* PV90*	PX90*					IC75T	
	M	M10	NX2525 AP25N* VP25N*	T110A T1000A T2000Z* T1500Z*	NS520 AT530* GT530* GT720*	TN60 PV60* TN6020 PV7020*	LN10 CX50		GC1525*	KT125	TP1020 TP1030* CM CMP*		
		M20	NX2525 AP25N* VP25N*	T1200A T2000Z* T1500A T1500Z*	NS530 GT730* NS730	TN90 TN6020 PV90* PV7020* PV7025*	CX50 CX75	CH550					
		M30											
	K	K01	NX2525 AP25N*	T110A T1000A T2000Z* T1500Z*	NS710 NS520 AT520* GT520* GT720*	TN30 PV30* PV7005* TN6010 PV7010*	LN10						
		K10	NX2525 AP25N*	T1200A T2000Z* T1500A T1500Z*	NS520 GT730* NS730	TN60 PV60* TN6020 PV7020* PV7025*	LN10		CT5015	KT325 KT125			
		K20	NX2525 AP25N*	T3000Z*			CX75						
	Milling	P	P10	NX2525			TN60	CX75	MZ1000*			C15M	IC30N
			P20	NX2525	T250A	NS530	TN100M TN60	CX75 CX90	CH550 CH7030 MZ1000* MZ2000*	CT530	KT530M HT7 KT605M	C15M MP1020	IC30N
P30			NX4545	T250A T4500A	NS530 NS540 NS740		CX90 CX99	MZ3000* CH7035				IC30N	
M		M10	NX2525				TN60						IC30N
		M20	NX2525		NS530	TN100M		CX75	CH550 CH7030 MZ1000* MZ2000*	CT530	KT530M HT7 KT605M	C15M	IC30N
		M30	NX4545	T250A	NS540 NS740			CX90 CX99	MZ3000* CH7035				
K		K01											
		K10	NX2525		NS530	TN60							
		K20	NX2525					CX75			KT530M HT7		

*Coated Cermet

(Note) The above table is selected from a publication. We have not obtained approval from each company.

CVD COATED GRADE

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Iscar		
	Symbol												
Turning	P	P01	UE6105	AC810P AC700G	T9105 T9005	CA510 CA5505	JC110V	HG8010	GC4205 GC4005	KCP05 KC9105	TP0500 TP1500	IC9150 IC8150 IC428	
		P10	UE6105 MC6015 UE6110 MY5015	AC810P AC700G AC820P AC2000	T9105 T9005 T9115	CA510 CA5505 CA515 CA5515	JC110V JC215V	HG8010 HG8025 GM8020	GC4315 GC4215 GC4015 GC4325	KCP10B KCP10 KCP25 KC9110	TP1500 TP2500	IC9150 IC9015 IC8150 IC8250	
		P20	MC6015 UE6110 MC6025 UE6020 MY5015	AC820P AC2000 AC830P	T9115 T9125	CA515 CA5515 CA525 CA5525 CR9025	JC110V JC215V	HG8025 GM8020 GM25	GC4315 GC4215 GC4015 GC4325 GC4225 GC4025	KCP25B KCP25 KC9125	TP2500	IC9015 IC8250 IC9025 IC9250 IC8350	
		P30	MC6025 UE6020 UE6035 UH6400	AC830P AC630M	T9125 T9135 T9035	CA525 CA5525 CA530 CA5535 CR9025	JC215V JC325V	GM25 GM8035	GC4325 GC4225 GC4025 GC4235 GC4035	KCP30 KCP40 KC8050	TP3500 TP3000	IC8350 IC9250 IC9350	
		P40	UE6035 UH6400	AC630M	T9135 T9035	CA530 CA5535	JC325V JC450V	GM8035 GX30	GC4235 GC4035	KCP30 KCP40 KC9140 KC9040 KC9240 KC9245	TP3500 TP3000	IC9350	
	M	M10	MC7015 US7020	AC610M	T9115	CA6515	JC110V		GC2015	KCM15	TM2000	IC9250 IC6015 IC8250	
		M20	MC7015 US7020 MC7025	AC610M AC6030M AC630M	T6020 T9125	CA6515 CA6525	JC110V	HG8025 GM25	GC2015	KCM15 KC9225	TM2000	IC9250 IC6015 IC9025 IC656	
		M30	MC7025 US735	AC6030M AC630M	T6030	CA6525		GM8035 GX30	GC2025	KCM25 KC9230	TM4000	IC9350 IC6025 IC635	
		M40	US735	AC6030M AC630M				GX30	GC2025	KCM35 KC9240 KC9245	TM4000	IC6025 IC9350	
	K	K01	MC5005 UC5105	AC405K AC410K	T5105	CA4505 CA4010	JC050W JC105V	HX3505 HG3305	GC3205 GC3210	KCK05	TH1500 TK1001 TK1000	IC5005 IC9007	
		K10	MC5015 UC5115 MY5015	AC405K AC410K AC415K AC420K AC700G	T5115	CA4515 CA4010 CA4115	JC050W JC105V JC110V	HX3515 HG3315 HG8010	GC3205 GC3210 GC3215	KCK15B KCK15 KCK20 KC9315	TK1001 TK1000 TK2000 TK2001	IC5005 IC5010 IC9150 IC428 IC4028	
		K20	MC5015 UC5115 UE6110 MY5015	AC415K AC420K AC700G AC820P	T5115 T5125	CA4515 CA4115 CA4120	JC110V JC215V	HG8025 GM8020	GC3215	KCK20 KC9110 KC9325	TK2001 TK2000	IC5010 IC8150 IC9150 IC9015 IC418	
		K30	UE6110	AC820P	T5125		JC215	HG8025 GM8020		KC9125 KC9325		IC9015 IC418	
	S	S01	US905			CA6515 CA6525 CA6535			S05F				
	Milling	P	P10				JC730U				MP1500	IC9080 IC4100 IC9015	
			P20	F7030	ACP100	T3130		JC730U	GX2140	GC4220		MP1500 MP2500	IC5100 IC520M
			P30	F7030	ACP100	T3130			GX2140 GX2160	GC4230	KCPK30 KC930M	MP2500	IC4050
			P40						GX2030 GX30 GX2160	GC4240	KC935M KC530M		
		M	M10										IC9250
			M20	F7030	ACP100	T3130	CA6535	JC730U	GX2140		KC925M	MP2500	IC520M IC9350
M30			F7030	ACP100	T3130	CA6535		GX2140 GX2160 GX30	GC2040	KC930M	MP2500	IC9350 IC4050	
M40								GX2030 GX2160 GX30		KC930M KC935M		IC635	
K		K01					JC600						
		K10	MC5020	ACK100	T1115 T1015		JC600						
		K20	MC5020	ACK200	T1115 T1015		JC610		GC3220 GC3330 K20W	KC915M	MK1500 MK2000	IC5100 IC9150	
		K30					JC610	GX30	GC3330 GC3040	KC920M KC925M KCPK30 KC930M KC935M	MK2000 MK3000	IC4100 IC4050 IC520M	

(Note) The above table is selected from a publication. We have not obtained approval from each company.

GRADES COMPARISON TABLE

PVD COATED GRADE

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Iscar	
	Symbol											
Turning	P	P01										
		P10	VP10MF		AH710			GC1525 GC1025	KC5010 KC5510 KU10T	CP200 TS2000	IC250 IC350 IC507 IC570 IC807 IC907 IC908	
		P20	VP10RT VP20RT VP15TF VP20MF		AH710 AH725 AH120 SH730 GH730 GH130	PR930 PR1025 PR1115 PR1225		IP2000	GC1525 GC1025 GC1125	KC5025 KC5525 KC7215 KC7315 KU25T	CP250 TS2500	IC228 IC250 IC308 IC328 IC350 IC354 IC507 IC528 IC570 IC807 IC808 IC907 IC908 IC928 IC1008 IC1028 IC3028
		P30	VP10RT VP20RT VP15TF VP20MF		AH725 AH120 SH730 GH730 GH130 AH740 J740			IP3000	GC1025 GC1125	KC7015 KC7020 KU25T KC7235	CP500	IC228 IC250 IC328 IC330 IC354 IC528 IC1008 IC1028 IC3028
		P40			AH740 J740					KC7040 KC7140 KC7030	CP500	IC228 IC328 IC330 IC528 IC1008 IC1028 IC3028
		M01										
	M10	VP10MF		AH710		PR915 PR1025 PR1225 PR1425	JC5003 JC8015	IP050S	GC1005 GC1025 GC1125 GC1105	KC5010 KC5510 KC6005 KC6015	CP200 TS2000	IC330 IC354 IC507 IC520 IC570 IC807 IC907 IC3028
	M20	VP10RT VP20RT VP15TF VP20MF	AC520U	AH710 AH725 AH120 SH730 GH730 GH130 GH330 AH630	PR1025 PR1125 PR1225 PR915 PR930	JC5003 JC5015 JC8015	IP100S	GC1005 GC1025 GC1125 GC1105	KC5025 KC5525 KC7020 KC7025	CP250 TS2500 CP500	IC250 IC330 IC354 IC808 IC908 IC1008 IC1028 IC3028	
	M30	VP10RT VP20RT VP15TF VP20MF MP7035	AC520U AC530U	GH330 AH725 AH120 SH730 GH730 GH130 J740 AH645	PR1125	JC5015 JC8015		GC1125 GC2035	KC7030 KC7225	CP500	IC228 IC250 IC328 IC330 IC1008 IC1028 IC3028	
	M40	MP7035	AC530U	J740				GC2035			IC328 IC928 IC1008 IC1028 IC3028	
	K	K01										
		K10		AC510U	GH110 AH110 AH710	PR905				KC5010 KC7210	CP200 TS2000	IC350 IC1008
		K20	VP10RT VP20RT VP15TF		GH110 AH110 AH710 AH725 AH120 GH730 GH130	PR905				KC7015 KC7215 KC7315	CP200 CP250 TS2000 TS2500	IC228 IC350 IC808 IC908 IC1008
		K30	VP10RT VP20RT VP15TF		AH725 AH120 GH730 GH130					KC7225	CP500	IC228 IC350 IC808 IC908 IC1008
	S	S01	MP9005 VP05RT		AH905		JC5003 JC8015					IC507 IC907
		S10	MP9005 MP9015 VP10RT	AC510U	AH905 SH730 AH110 AH120		JC5003 JC5015 JC8015		GC1105 GC1005 GC1025	KC5010 KC5410 KC5510	CP200 CP250 TS2000 TS2500	IC507 IC903
		S20	MP9015 MT9015 VP20RT	AC510U AC520U	AH120 AH725	PR1125	JC5015 JC8015		GC1025 GC1125	KC5025 KC5525	CP250 TS2500 CP500	IC300 IC808 IC908 IC928 IC3028 IC806
		S30	VP15TF	AC520U	AH725	PR1125			GC1125			
	Milling	P	P01					JC5003				
			P10		ACP200		PR730 PR830 PR1025 PR1225	JC5003 JC5030 JC8015 JC5015 JC5118	ACS05E CY9020 JX1005 JX1020 PC20M JP4020 PCA12M	GC1010 GC1025	KC715M	IC250 IC350 IC808 IC810 IC900 IC903 IC908 IC910 IC950
P20			MP6120 VP15TF	ACP200	AH725 AH120 GH330 AH330	PR730 PR830 PR1025 PR1225 PR1230 PR1525	JC5015 JC5030 JC5040 JC6235 JC8015 JC5118 JC6235	CY150 CY15 JX1015	GC1025 GC1010 GC2030	KC522M KC525M	F25M MP3000	IC250 IC300 IC328 IC330 IC350 IC528 IC808 IC810 IC830 IC900 IC908 IC910 IC928 IC950 IC1008

(Note) The above table is selected from a publication. We have not obtained approval from each company.

Classification	ISO	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Iscar		
	Symbol												
Milling	P	P30	MP6120 VP15TF MP6130 VP30RT	ACP200 ACP300	AH725 AH120 AH130 AH140 GH130 AH730	PR660 PR1230	JC5015 JC5040 JC8015 JC5118	JS4045 JS4060 CY250 CY25 HC844 JX1045 PTH30E	GC1010 GC1030 GC2030	KC725M KC530M	F25M MP3000 F30M	IC250 IC300 IC328 IC330 IC350 IC528 IC830 IC900 IC928 IC950 IC1008	
			P40	VP30RT	ACP300	AH140		JC5040 JC5118	JS4060 PTH40H JX1060 GF30 GX30	GC1030	KC735M	F40M T60M	
	M	M01						PCS08M					
		M10				PR730 PR1025 PR1225	JC5118	CY9020 JX1020	GC1025 GC1030	KC715M			IC903
		M20	VP15TF MP7130 MP7030 VP20RT	ACP200	AH725 AH120 GH330 AH330 GH110	PR730 PR660 PR1025 PR1225	JC5015 JC5040 JC5118 JC8015	CY150 CY15 JX1015	GC1025 GC1030 GC1040 GC2030	KC730 KC522M KC525M	F25M MP3000		IC250 IC300 IC808 IC830 IC900 IC908 IC928 IC1008
		M30	VP15TF MP7130 MP7030 VP20RT MP7140 VP30RT	ACP200 ACP300	AH120 AH725 AH130 AH140 GH130 AH730 GH340	PR660 PR1510	JC5015 JC8015 JC8050 JC5118	CY250 CY25 HC844 JM4060 JX1045	GC1040 GC2030	KC725M KC735M	F30M F40M MP3000		IC250 IC300 IC328 IC330 IC830 IC928 IC1008
		M40	MP7140 VP30RT	ACP300	AH140		JC5015 JC5118 JC8050	JX1060 GF30 GX30			F40M		
	K	K01	MP8010		AH110 GH110 AH330		JC5003	ATH80D PTH08M PCA08M PCS08M					
		K10	MP8010		AH110 GH110 AH725 AH120 GH130 AH330	PR1210 PR905	JC5003 JC8015	ASC05E JX1005 JX1020 CY9020 CY100H CY10H	GC1010	KC510M			IC350 IC810 IC830 IC900 IC910 IC928 IC950 IC1008
		K20	VP15TF VP20RT	ACK300	GH130	PR1210 PR905	JC5015 JC5080 JC8015 JC6235	CY150 CY15 PTH13S JX1015	GC1010 GC1020	KC520M KC525M	MK2000		IC350 IC808 IC810 IC830 IC900 IC908 IC910 IC928 IC950 IC1008
		K30	VP15TF VP20RT	ACK300			JC5015 JC8015 JC5080	CY250 GX2030 GX30 CY25 PTH40H PTH30E JX1045	GC1020	KC725M KC735M			IC350 IC808 IC830 IC908 IC928 IC950 IC1008
	S	S01				PR905	JC5003 JC8015 JC5118						
		S10	MP9120 VP15TF	EH520Z EH20Z		PR905	JC5003 JC5015 JC8015 JC5118	PCS08M PTH13S JS1025	C1025	KC510M			IC903
		S20	MP9120 VP15TF MP9130 MP9030	EH520Z EH20Z ACK300 ACP300		PR905	JC8015 JC5015 JC8050 JC5118	CY100H CY10H	GC1025 GC2030 S30T	KC522M KC525M			IC300 IC908 IC808 IC900 IC830 IC928 IC328 IC330
		S30		ACP300			JC8050 JC5118		GC2030	KC725M	F40M		IC830 IC928
	H	H01	MP8010 VP05HT				JC8003 JC8008						IC903
		H10	VP15TF VP10H				JC8003 JC8008 JC8015 JC5118	BH200 BH250	GC1010 GC1030	KC635M	MH1000 F15M		IC900
		H20	VP15TF				JC8015 JC5118	ATH80D PTH08M PCA08M JP4005 JX1005	GC1010 GC1030	KC635M	F15M		IC900 IC808 IC908 IC1008
		H30								KC530M	MP3000 F30M		IC808 IC908 IC1008

(Note) The above table is selected from a publication. We have not obtained approval from each company.

GRADES COMPARISON TABLE

CBN

	ISO Classification	ISO Symbol	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Sandvik	Seco Tools	
		Turning	H	H01	BC8110 MBC010 MB810	BNC100 BNX10 BN1000	BXM10 BX310	KBN050M KBN10M KBN510		
H10	BC8110 MBC020 BC8020 MB825 MB8025			BNC160 BNX20 BN2000	BXM20 BX330	KBN25M KBN525	JBN300	CB7015	CBN010	
H20	MBC020 BC8020 MB8025			BNC200 BNX25 BN250	BXM20 BX360	KBN30M	JBN245	CB7025 CB20	CBN150 CBN160C	
H30	BC8020 MB835			BNC300 BN350	BXC50 BX380	KBN35M		CB7525	CBN150 CBN160C	
S	S01		MB730	BN700 BN7000	BX950					CBN170
	S10									
	S20									
	S30									
K	K01		MB710 MB5015	BN500 BNC500 BN700	BX930 BX910					
	K10		MB730 MB4020	BN7500 BN7000	BX850	KBN60M	JBN795	CB7525		
	K20		MB730 MB4020	BN700 BN7000	BX950	KBN60M	JBN500			CBN200
	K30		BC5030 MBS140	BNS800	BX90S BXC90	KBN900		CB7925		CBN300 CBN400C CBN500
Sintered Alloy			MB4020 MB835	BN7500 BN7000	BX450 BX470 BX480	KBN65B KBN570 KBN65M KBN70M				CBN200

PCD

	ISO Classification	ISO Symbol	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Sandvik	Seco Tools
		Turning	N	N01	MD205	DA90	DX180 DX160	KPD001	JDA30 JDA735
N10	MD220			DA150	DX140	KPD010		CD10	PCD10
N20	MD220			DA2200	DX120		JDA715		PCD20
N30	MD230			DA1000	DX110	KPD230	JDA10		PCD30 PCD30M

(Note) The above table is selected from a publication. We have not obtained approval from each company.

INSERT CHIP BREAKER COMPARISON TABLE

NEGATIVE INSERT TYPE

ISO Classification	Cutting Mode	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Walter	TaeguTec
P	Finish	PK* FH FY	FA FL	O1* TF ZF	DP* GP, PP XP, XP-T, XF		FE	QF LC	FF	FF1, FF2	FP5	FA
	Light	LP C SA, SH	SU LU SX, SE	NS, 27 TSF, AS	PQ HQ, CQ	PF UR, UA, UT	BE B, CE	XF PF	LF*, FN	MF2	MP3 NF3, NF4	FG
	Light (Mild Steel)	SY		17	XQ, XS							FC
	Light (With Wiper)	SW	LUW, SEW	AFW, ASW	WP, WQ			WL, WF	FW	W-MF2	NF	WS
	Medium	MP MA MH	GU UG GE, UX	NM, ZM TM DM, 33, 37, 38	PG, CJ, GS PS, HS PT	PG UB	CT, AB AH AY, AE	PM QM, XM	P MN	MF3 MF5, M3 M5	MP5	PC, MP MT SM
	Medium (With Wiper)	MW	GUW					WMX, WM	MW, RW	M6, W-M3 W-MF5	NM	WT
	Rough	RP GH Std.	MU, MX, ME UZ	TH Std.	PH GT Std.	UD GG	RE	PR, HM XMR	RN, RP	MR6, MR7	RP5 NM6, NM9	RT
	Heavy	HZ, HL HM, HX HV	MP HG, HP HU, HW, HF	THS TU TUS	PX	UC	HX HE, H	QR, PR HR, MR	MR RM RH	R4, R5, R6 57, RR6, R7 R8, RR9	NR6, NRF NRR	RX, RH HD, HY, HT HZ
M	Finish Light	SH, LM	SU	SS	MQ, GU		MP, AB, BH	MF	FP LF*	MF1	NF4	SF
	Medium	MS, GM MM, MA ES	EX, UP GU HM	SA, SF SM S	MS, MU SU, HU, TK ST	SF, SZ SG	PV, DE, SE AH	MM QM K	MP	MF4	NM4	ML EM VF
	Heavy	GH, RM HZ	MU MP	TH, SH			AE	MR MR	UP, RP	M5, MR7 RR6	NR4, NR5	
K	Finish Light	LK, MA		CF	Std.		VA, AH	KF	FN	MF2, MF5, M3, M4	MK5	
	Medium	MK, GK Std.	UZ, GZ, UX	CM Std.	C	PG	V, AE	KM	RP, UN	M5	RK5, NM5	
	Rough	RK			PH, GC	GG	RE	KR			RK7	
	Heavy	Flat Top	Flat Top	CH, Flat Top	ZS, Flat Top	Flat Top	Flat Top		Flat Top	MR3, MR4, MR7 Flat Top	Flat Top	
S	Finish	FJ*	EF		MQ			SF	FS, LF*	MF1		
	Light	LS	SU*					SGF*	MS	MF4, MF5	NF4, NFT	EA
	Medium	MS	EG, EX, UP	SA, HMM	MS, MU, TK			NGP*, SM	UP, P, NGP*	M1	NMS, NMT	
	Heavy	RS, GJ	MU					SR, SMR	RP	M5, MR3, MR4	NRS, NRT	ET

*Peripheral ground type insert.

(Note) Above charts are based on published data and not authorized by each manufacturer.

TECHNICAL DATA

INSERT CHIP BREAKER COMPARISON TABLE

7° POSITIVE INSERT TYPE

ISO Classification	Cutting Mode	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Walter	TaeguTec
P	Finish	SMG*	FC*, SC*	JS*, 01*	CF*, CK* GQ*, GF*			UM*	LF*			
	Finish Light	FP, FV LP, SV	FP, LU SU	PF, PSF PS, PSS	GP XP		JQ	PF, UF	UF, 11 LF, FP	FF1 F1	PF4	FA FG
	Light (With Wiper)	SW	LUW					WF	FW	W-F1		WS
	Medium	MV MP, Std.	MU	23 PM, 24	HQ XQ, GK	FT	JE	PM, UM	MF, MP	F2, MF2, M5	PS5 PM5	PC MT
	Medium (With Wiper)	MW						WM	MW	W-F2	PM	WT
M	Finish Light	FM LM	FC* LU SU	PF, PSF PS, PSS	CF*, CK* GQ*, GF* MQ		MP	MF	LF, UF FP	F1, F2		
	Medium	MM, Std.	MU	PM	HQ, GK			MM	MP			
K	Medium	MK, Std. Flat Top	MU, Flat Top	Flat Top, CM	Flat Top*			KF, KM, KR	Flat Top	F1, M3, M5		
N	Medium	AZ*	AG*	AL*	AH*			AL*	HP*	AL*	PM2*	SA* FL*
S	Finish Light	FJ*			MQ				LF* HP*			

*Peripheral ground type insert.

(Note) Above charts are based on published data and not authorized by each manufacturer.

11° POSITIVE INSERT TYPE

ISO Classification	Cutting Mode	Mitsubishi Carbide	Sumitomo Electric	Tungaloy	Kyocera	Dijet	Mitsubishi Hitachi Tool	Sandvik	Kennametal	Seco Tools	Walter	TaeguTec
P	Finish Light	FV, SMG* SV	SI LU SU	01* PF, PSF PS, PSS	GP, CF* XP		JQ	PF	UF LF			
	Medium	MV	MU	PM 23 24	HQ XQ		JE	PM, UM	MF			
M	Finish Light	SV	SU	PF, PS	GP, CF*		MP	MF				
	Medium	MV	MU	PM	HQ			MM				

*Peripheral ground type insert.

(Note) Above charts are based on published data and not authorized by each manufacturer.